
agentMET4FOF Documentation

Bang Xiang Yong

Jul 08, 2021

Getting started:

1	Table of content	1
2	Quickstart	3
3	About	5
4	The agentMET4FOF dashboard	7
5	Documentation and video tutorials	11
6	Installation	13
7	Coming soon	15
8	Citation	17
9	Acknowledgement	19
10	Disclaimer	21
11	©License	23
12	Installation of agentMET4FOF	25
13	UML diagrams of agentMET4FOF	27
14	How to contribute to agentMET4FOF	37
15	Changelog	43
16	Learning how to use the agents	49
17	Working with signals carrying redundant information	79
18	agentMET4FOF agents	133
19	agentMET4FOF streams	145
20	agentMET4FOF dashboard	157

21 agentMET4FOF agent network	159
22 agentMET4FOF utilities	165
23 Indices and search:	169
24 References:	171
Bibliography	173
Python Module Index	175
Index	177

CHAPTER 1

Table of content

- *Quickstart*
- *About*
- *The agentMET4FOF dashboard*
- *Documentation and video tutorials*
- *Installation*
- *Coming soon*
- *Citation*
- *Acknowledgement*
- *Disclaimer*
- *© License*

CHAPTER 2

Quickstart

agentMET4FOF comes bundled with some tutorials to get you started as quick as possible. In your Python console execute the following to run the first tutorial.

```
>>> from agentMET4FOF_tutorials.tutorial_1_generator_agent import demonstrate_
↳ generator_agent_use
>>> generator_agent_network = demonstrate_generator_agent_use()
```

```
Starting NameServer...
Broadcast server running on 0.0.0.0:9091
NS running on 127.0.0.1:3333 (127.0.0.1)
URI = PYRO:Pyro.NameServer@127.0.0.1:3333

-----
|
| Your agent network is starting up. Open your browser and |
| visit the agentMET4FOF dashboard on http://127.0.0.1:8050/ |
|
|-----
INFO [2021-02-05 18:12:52.277759] (SineGeneratorAgent_1): INITIALIZED
INFO [2021-02-05 18:12:52.302862] (MonitorAgent_1): INITIALIZED
[2021-02-05 18:12:52.324078] (SineGeneratorAgent_1): Connected output module:↳
↳ MonitorAgent_1
SET STATE: Running
[...]
```

```
>>> generator_agent_network.shutdown()
0
NS shut down.
```


CHAPTER 3



About

CHAPTER 4

The agentMET4FOF dashboard

agentMET4FOF comes bundled with our so called *dashboard*. It is an optional component of every agent network and provides a web browser based view. You can observe the state of your agents, modify the connections between them and even add more pre-made agents to your network all during run-time. The address to your dashboard is printed to the console on every launch of an agent network.

The following image is close to what you will find in your browser on execution of tutorial 2. For details on the tutorials visit our [video tutorial series](#).

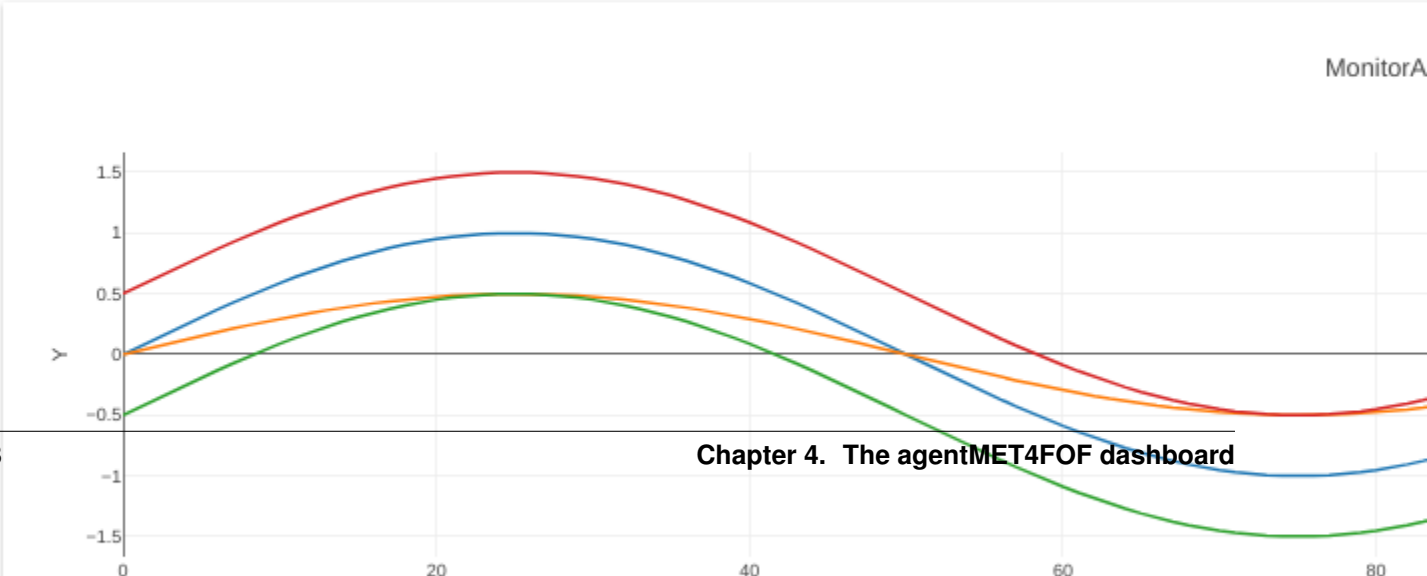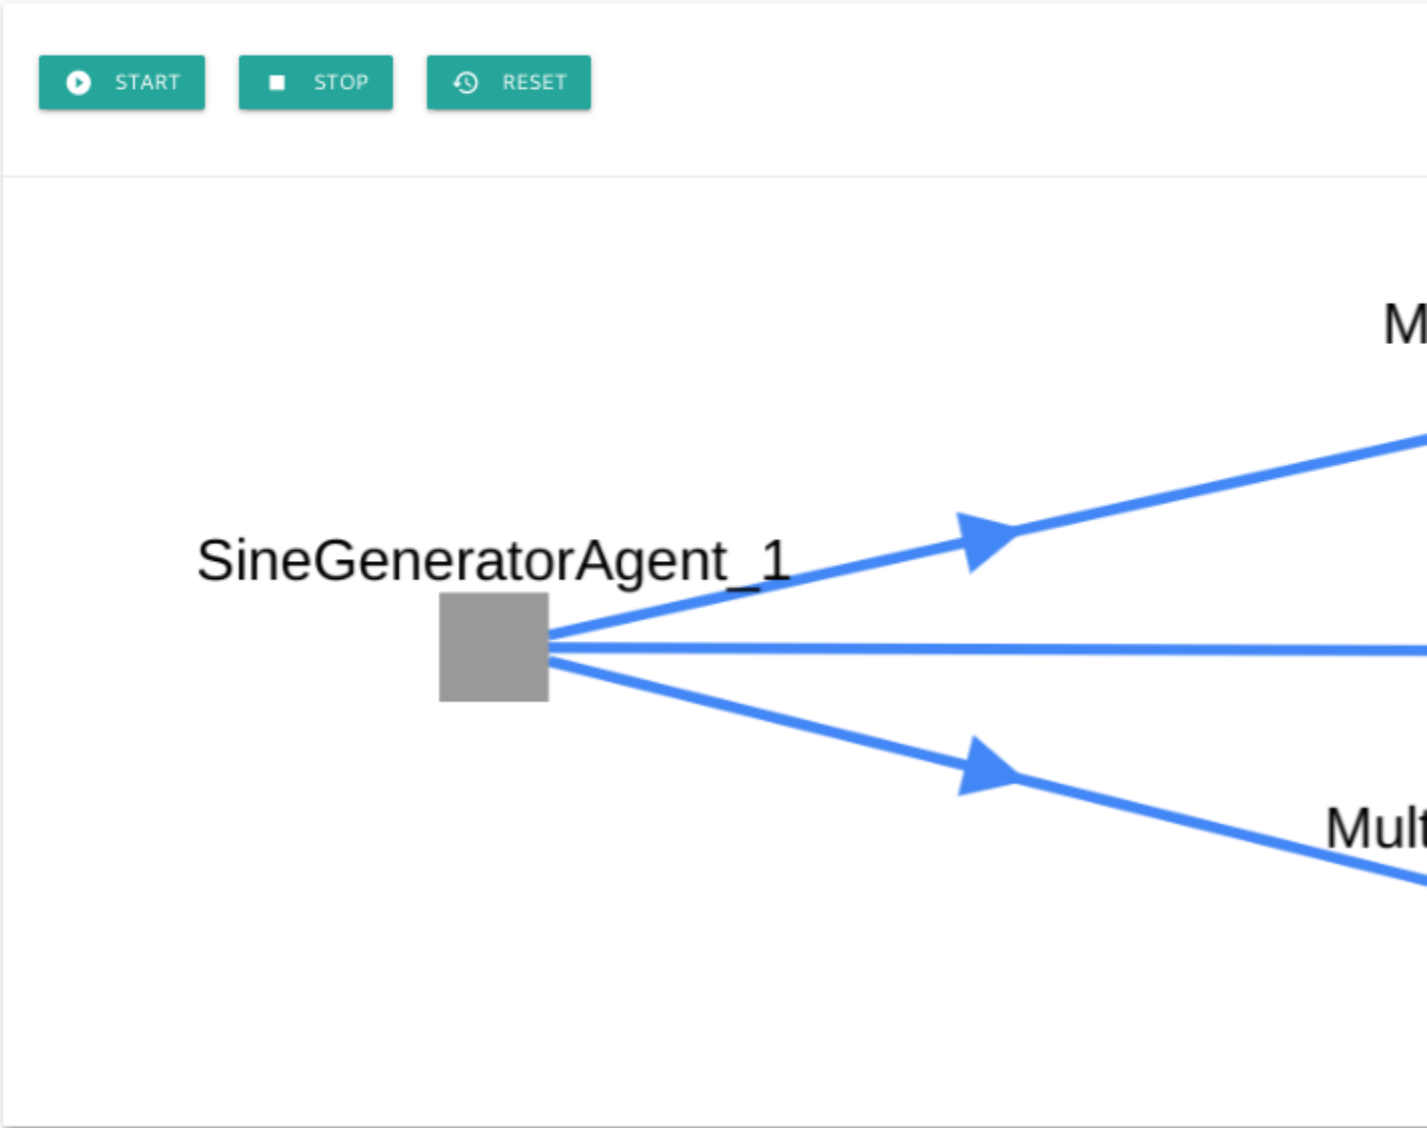

Screenshot

Documentation and video tutorials

Extended [documentation](#) can be found on [ReadTheDocs](#).

5.1 Video tutorial series

Additionally, we provide some [video tutorials](#) based on [agentMET4FOF 0.4.1](#) on the [project homepage](#) in the section *Tutorials for the multi-agent system agentMET4FOF*. You can self-register on the linked page and get started immediately. The video series begins with our motivation for creating agentMET4FOF, guide you through the installation of Python and other recommended software until you execute the tutorials on your machine.

5.2 Live online tutorial during early development

In an early development stage we held a live online tutorial based on [agentMET4FOF 0.1.0](#) which you can [download](#). If questions arise, or you feel something is missing, reach out to [us](#).

CHAPTER 6

Installation

The installation of agentMET4FOF is as straightforward as the Python ecosystem suggests. In the [video tutorials series](#) we guide you through every step until you have agentMET4FOF running on your machine. Besides that we have more details in the [installation section of the docs](#).

CHAPTER 7

Coming soon

- Dockerize agentMET4FOF
- Improve handling of metadata
- Further improve plotting

For a comprehensive overview of current development activities and upcoming tasks, take a look at the [project board](#), [issues](#) and [pull requests](#).

CHAPTER 8

Citation

If you publish results obtained with the help of agentMET4FOF, please cite the linked [DOI](#).

CHAPTER 9

Acknowledgement

This work was part of the Joint Research Project [Metrology for the Factory of the Future \(Met4FoF\)](#), project number [17IND12](#) of the European Metrology Programme for Innovation and Research (EMPIR). The EMPIR is jointly funded by the EMPIR participating countries within EURAMET and the European Union.

CHAPTER 10

Disclaimer

This software is developed as a joint effort of several project partners namely:

- Institute for Manufacturing of the University of Cambridge (IfM)
- Physikalisch-Technische Bundesanstalt (PTB)
- Van Swinden Laboratory (VSL)
- National Physics Laboratory (NPL)

under the lead of IfM. The software is made available “as is” free of cost. The authors and their institutions assume no responsibility whatsoever for its use by other parties, and makes no guarantees, expressed or implied, about its quality, reliability, safety, suitability or any other characteristic. In no event will the authors be liable for any direct, indirect or consequential damage arising in connection with the use of this software.

CHAPTER 11

©License

agentMET4FOF is distributed under the [LGPLv3](#) license.

CHAPTER 12

Installation of agentMET4FOF

The installation of agentMET4FOF is as straightforward as the Python ecosystem suggests. In the [video tutorial series linked in the README](#) we guide you through every step until you have agentMET4FOF running on your machine.

If you want to take the steps manually we guide you through in this document.

12.1 Set up a virtual environment

For the motivation of creating to virtual environment for your installation of the agents check [the official Python docs on that topic](#). You have the option to do this with *Anaconda*, if you already have it installed, or use the Python built-in tool `venv`. The commands differ slightly between *Windows* and *Mac/Linux*.

12.1.1 Create a `venv` Python environment on Windows

In your Windows PowerShell execute the following to set up a virtual environment in a folder of your choice.

```
PS C:> cd C:\LOCAL\PATH\TO\ENVS
PS C:\LOCAL\PATH\TO\ENVS> py -3 -m venv agentMET4FOF_venv
PS C:\LOCAL\PATH\TO\ENVS> agentMET4FOF_venv\Scripts\activate
```

Proceed to *step 2*.

12.1.2 Create a `venv` Python environment on Mac & Linux

In your terminal execute the following to set up a virtual environment in a folder of your choice.

```
$ cd /LOCAL/PATH/TO/ENVS
$ python3 -m venv agentMET4FOF_venv
$ source agentMET4FOF_venv/bin/activate
```

Proceed to *step 2*.

12.1.3 Create an Anaconda Python environment

To get started with your present *Anaconda* installation just go to *Anaconda prompt* and execute

```
$ cd /LOCAL/PATH/TO/ENVS  
$ conda env create --file /LOCAL/PATH/TO/agentMET4FOF/environment.yml
```

That's it!

12.2 Install agentMET4FOF via pip

Once you activated your virtual environment, you can install agentMET4FOF via:

```
pip install agentMET4FOF
```

```
Collecting agentMET4FOF  
[...]  
Successfully installed agentMET4FOF-[...] [...]
```

That's it!

12.3 Get started developing

As a starter we recommend working through the tutorials which we present in detail in our [video tutorial series](#) linked in the [README](#).

12.4 Orphaned processes

In the event of agents not terminating cleanly, you can end all Python processes running on your system (caution: the following commands affect **all** running Python processes, not just those that emerged from the agents).

12.4.1 Killing all Python processes in Windows

In your Windows command prompt execute the following to terminate all python processes.

```
> taskkill /f /im python.exe /t  
>
```

12.4.2 Killing all Python processes on Mac and Linux

In your terminal execute the following to terminate all python processes.


```
$ pkill python  
$
```

CHAPTER 13

UML diagrams of agentMET4FOF


In this section UML class diagrams of almost all components of agentMET4FOF are listed and shown. The images are click- and zoomable in the browser but can be downloaded for further investigation via right-click.

13.1 Overview

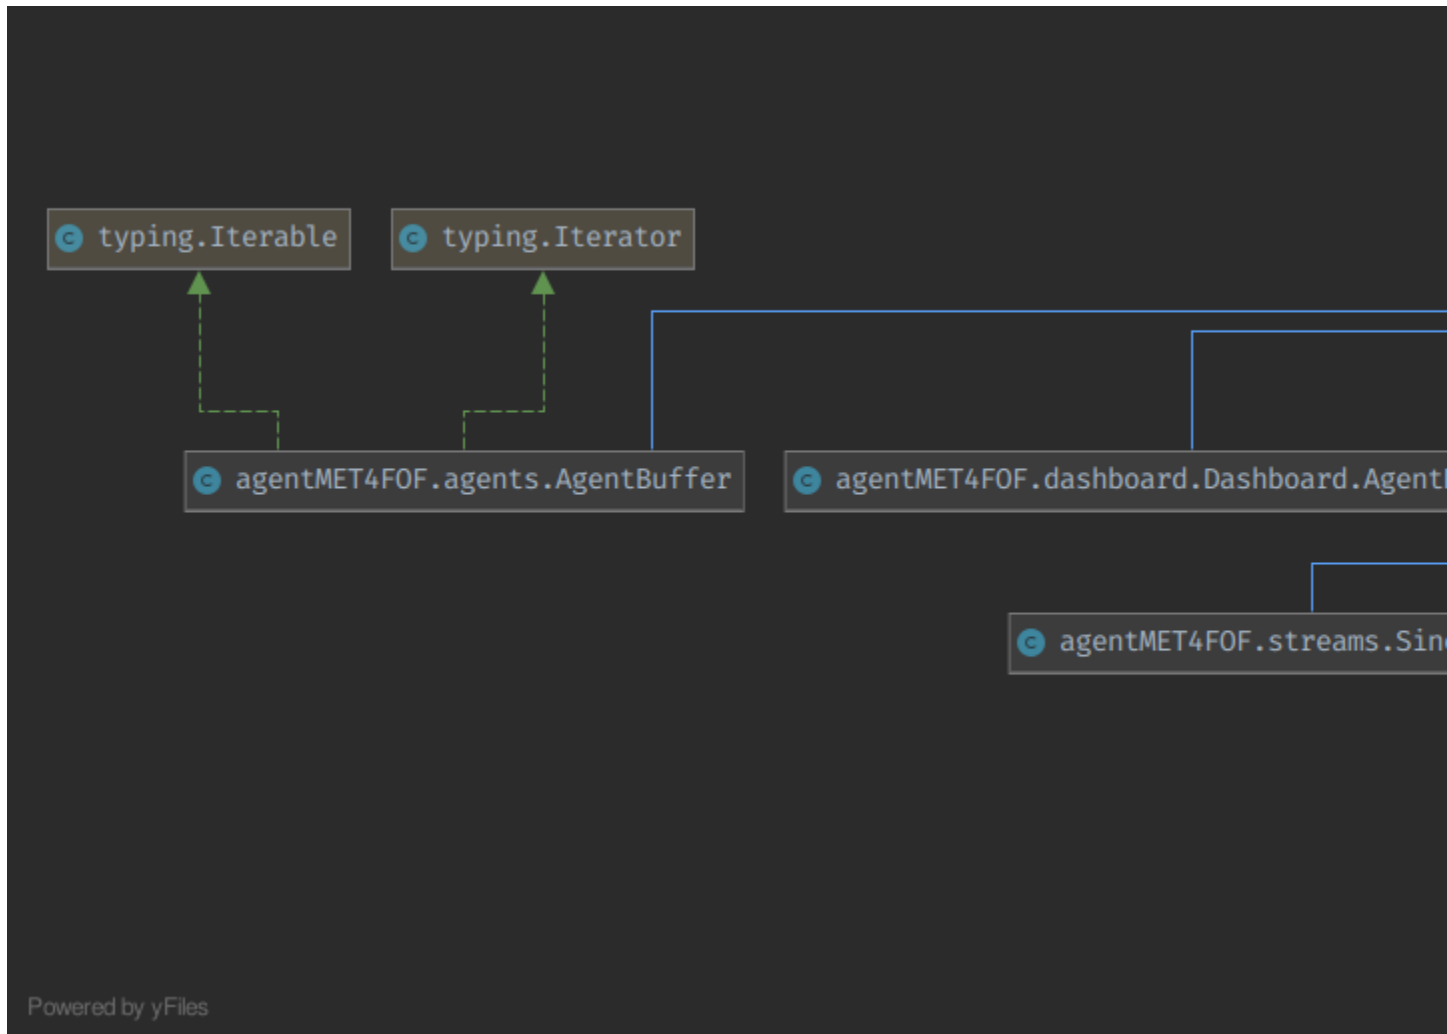


of all agentMET4FOF classes

13.2 UML class diagram of *agentMET4FOF.agents*

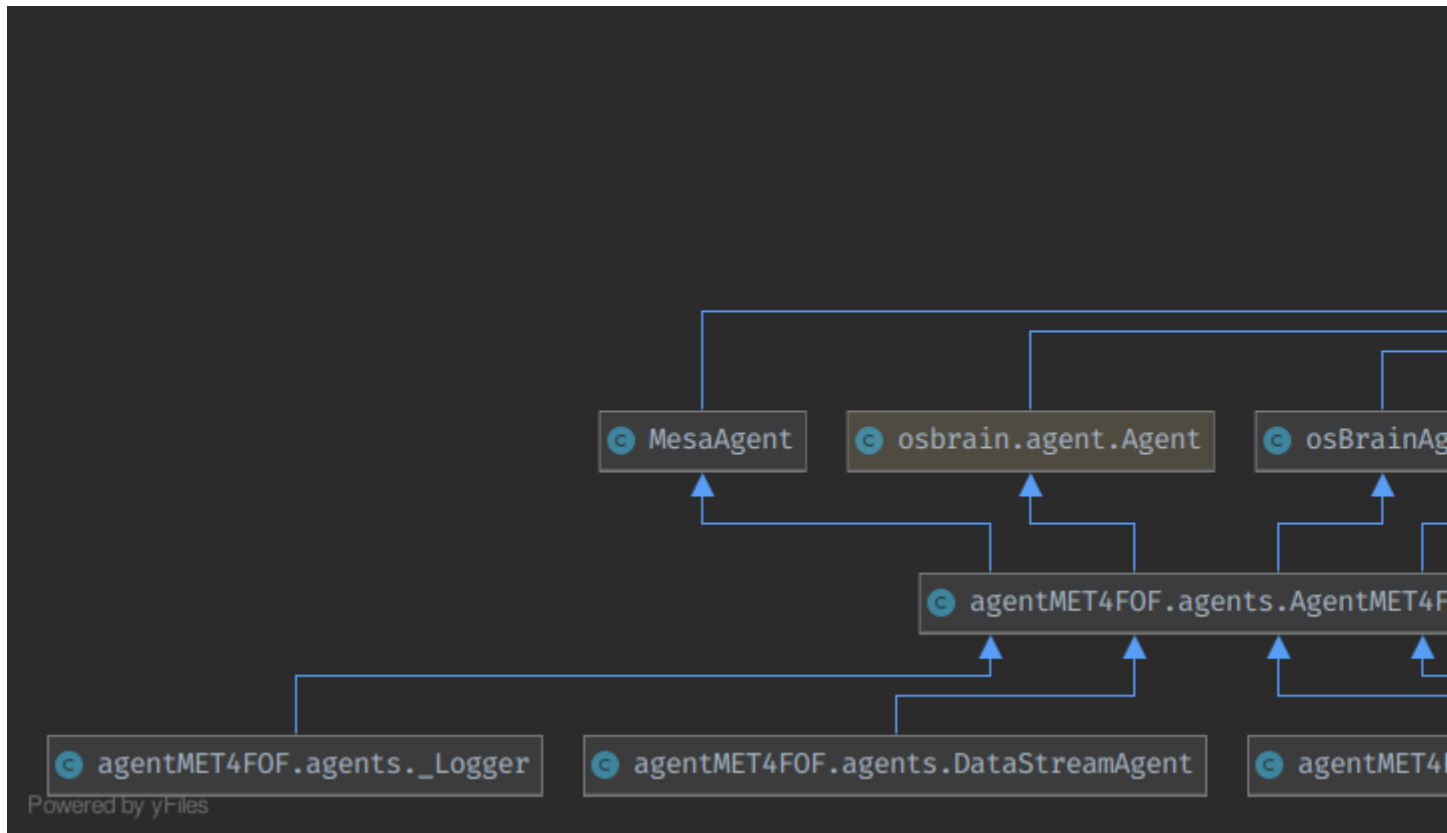


of classes in *agentMET4FOF.agents*


13.3 UML class diagram of *agentMET4FOF.streams*

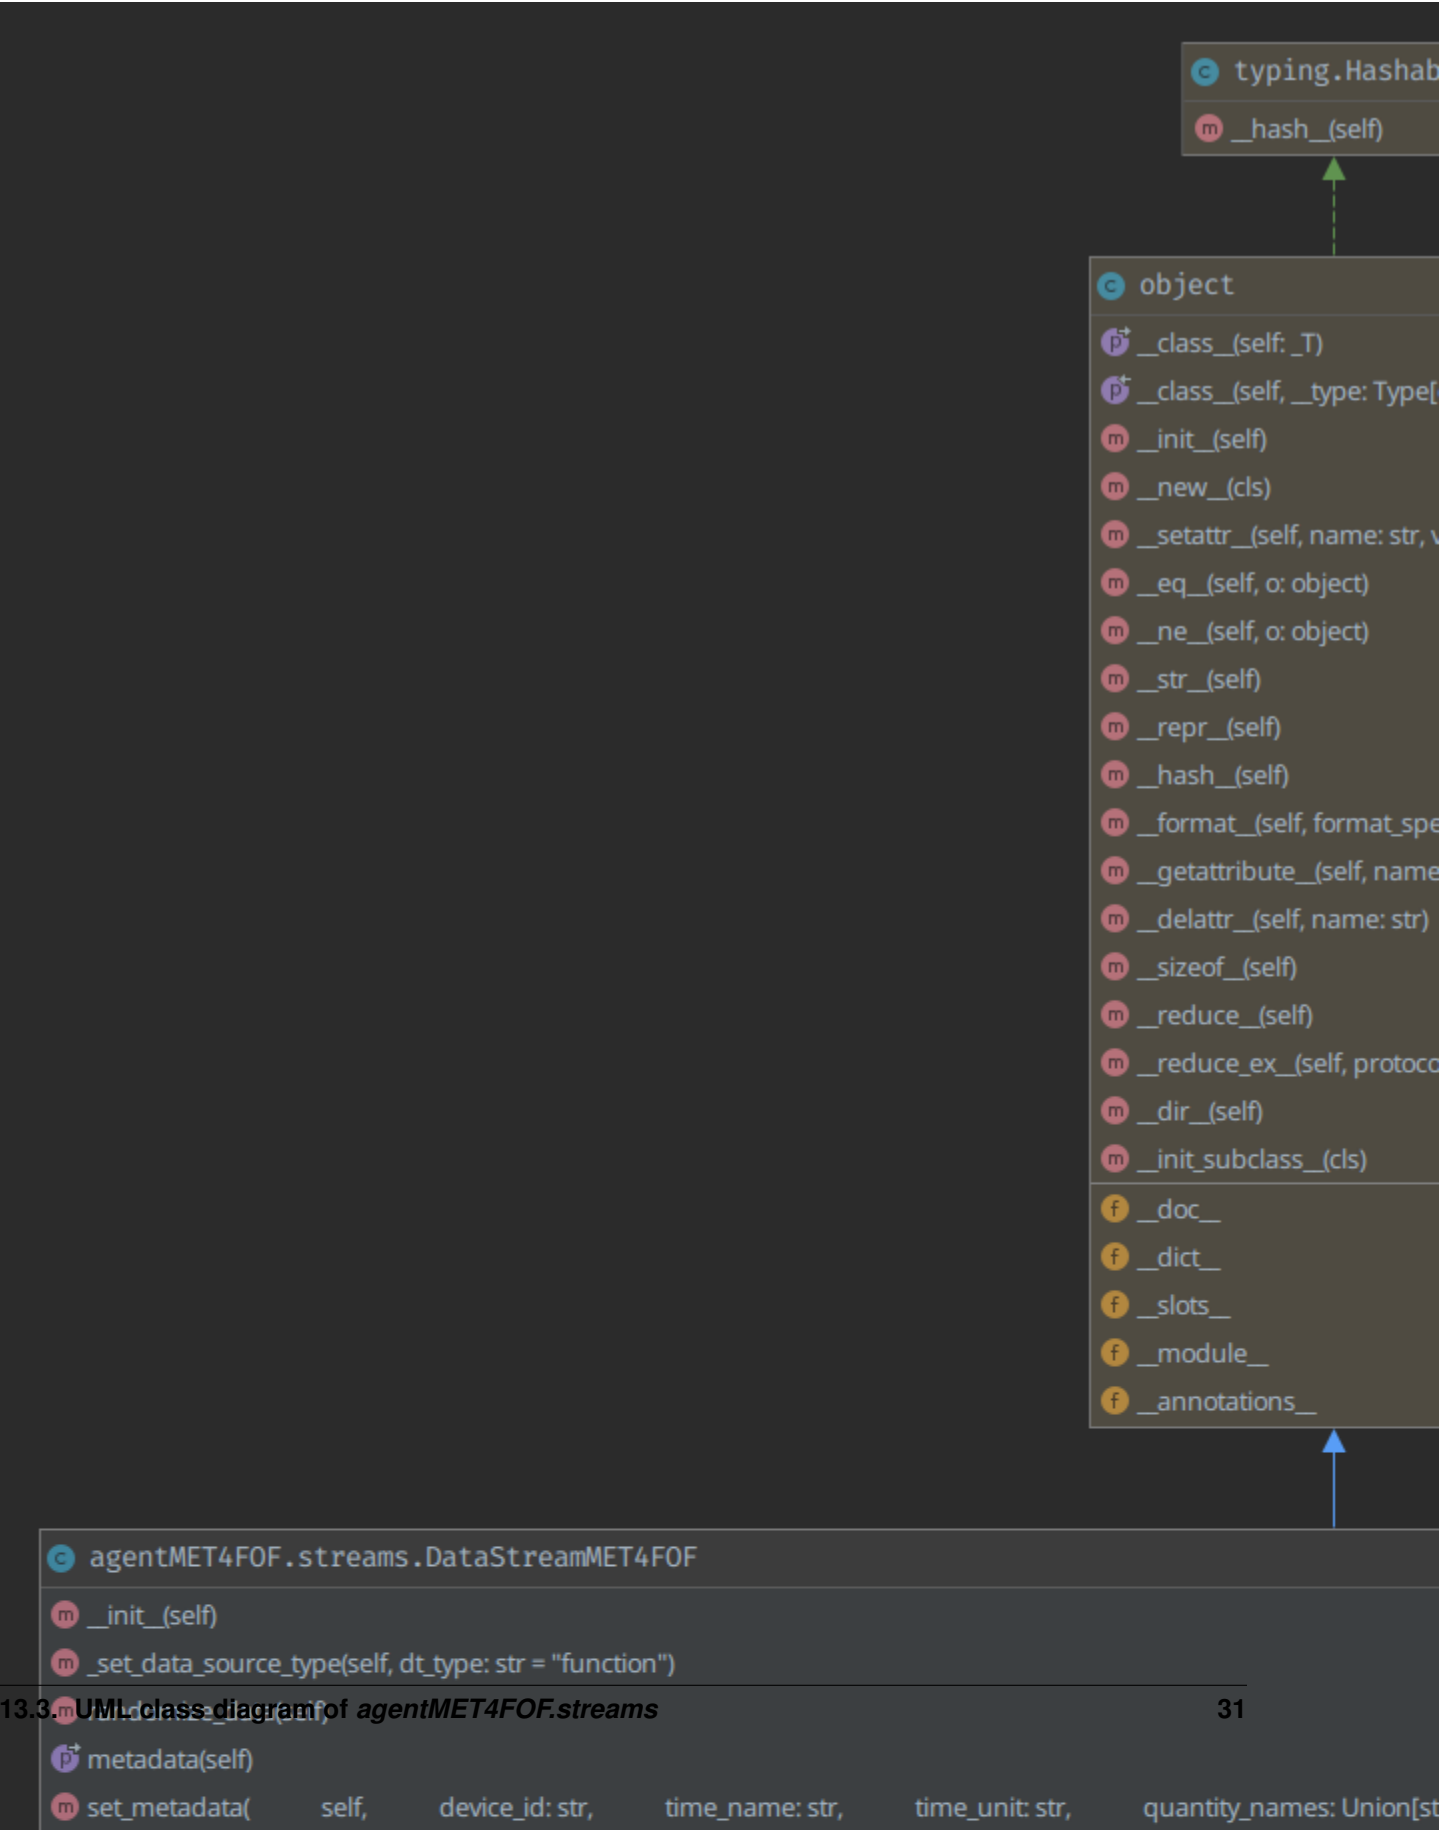

13.4 UML class diagram of *agentMET4FOF.metrological_agents*

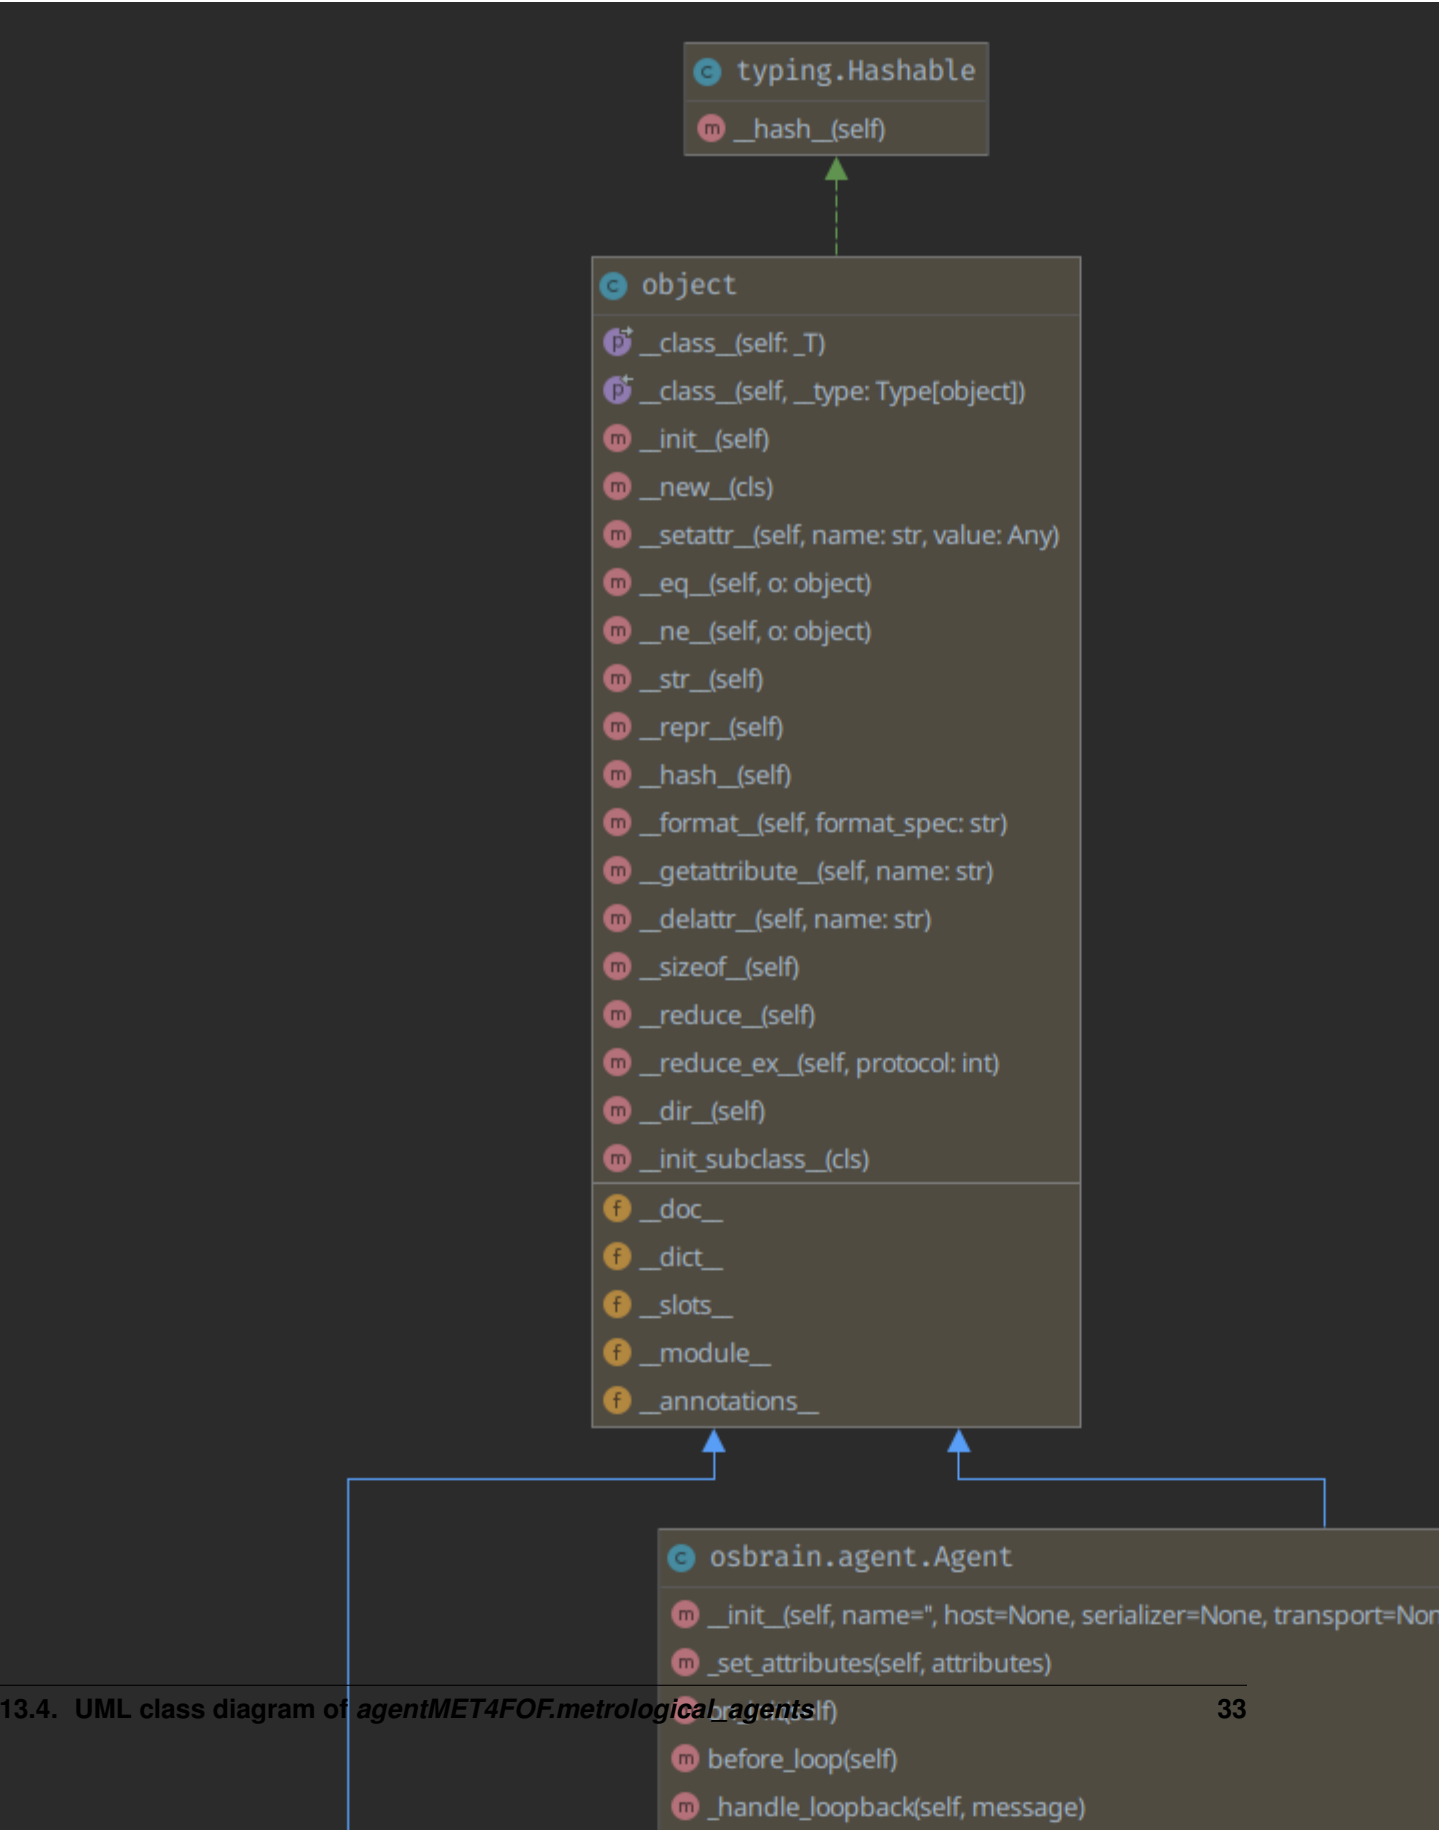

13.5 UML class diagram of *agentMET4FOF.metrological_agents*

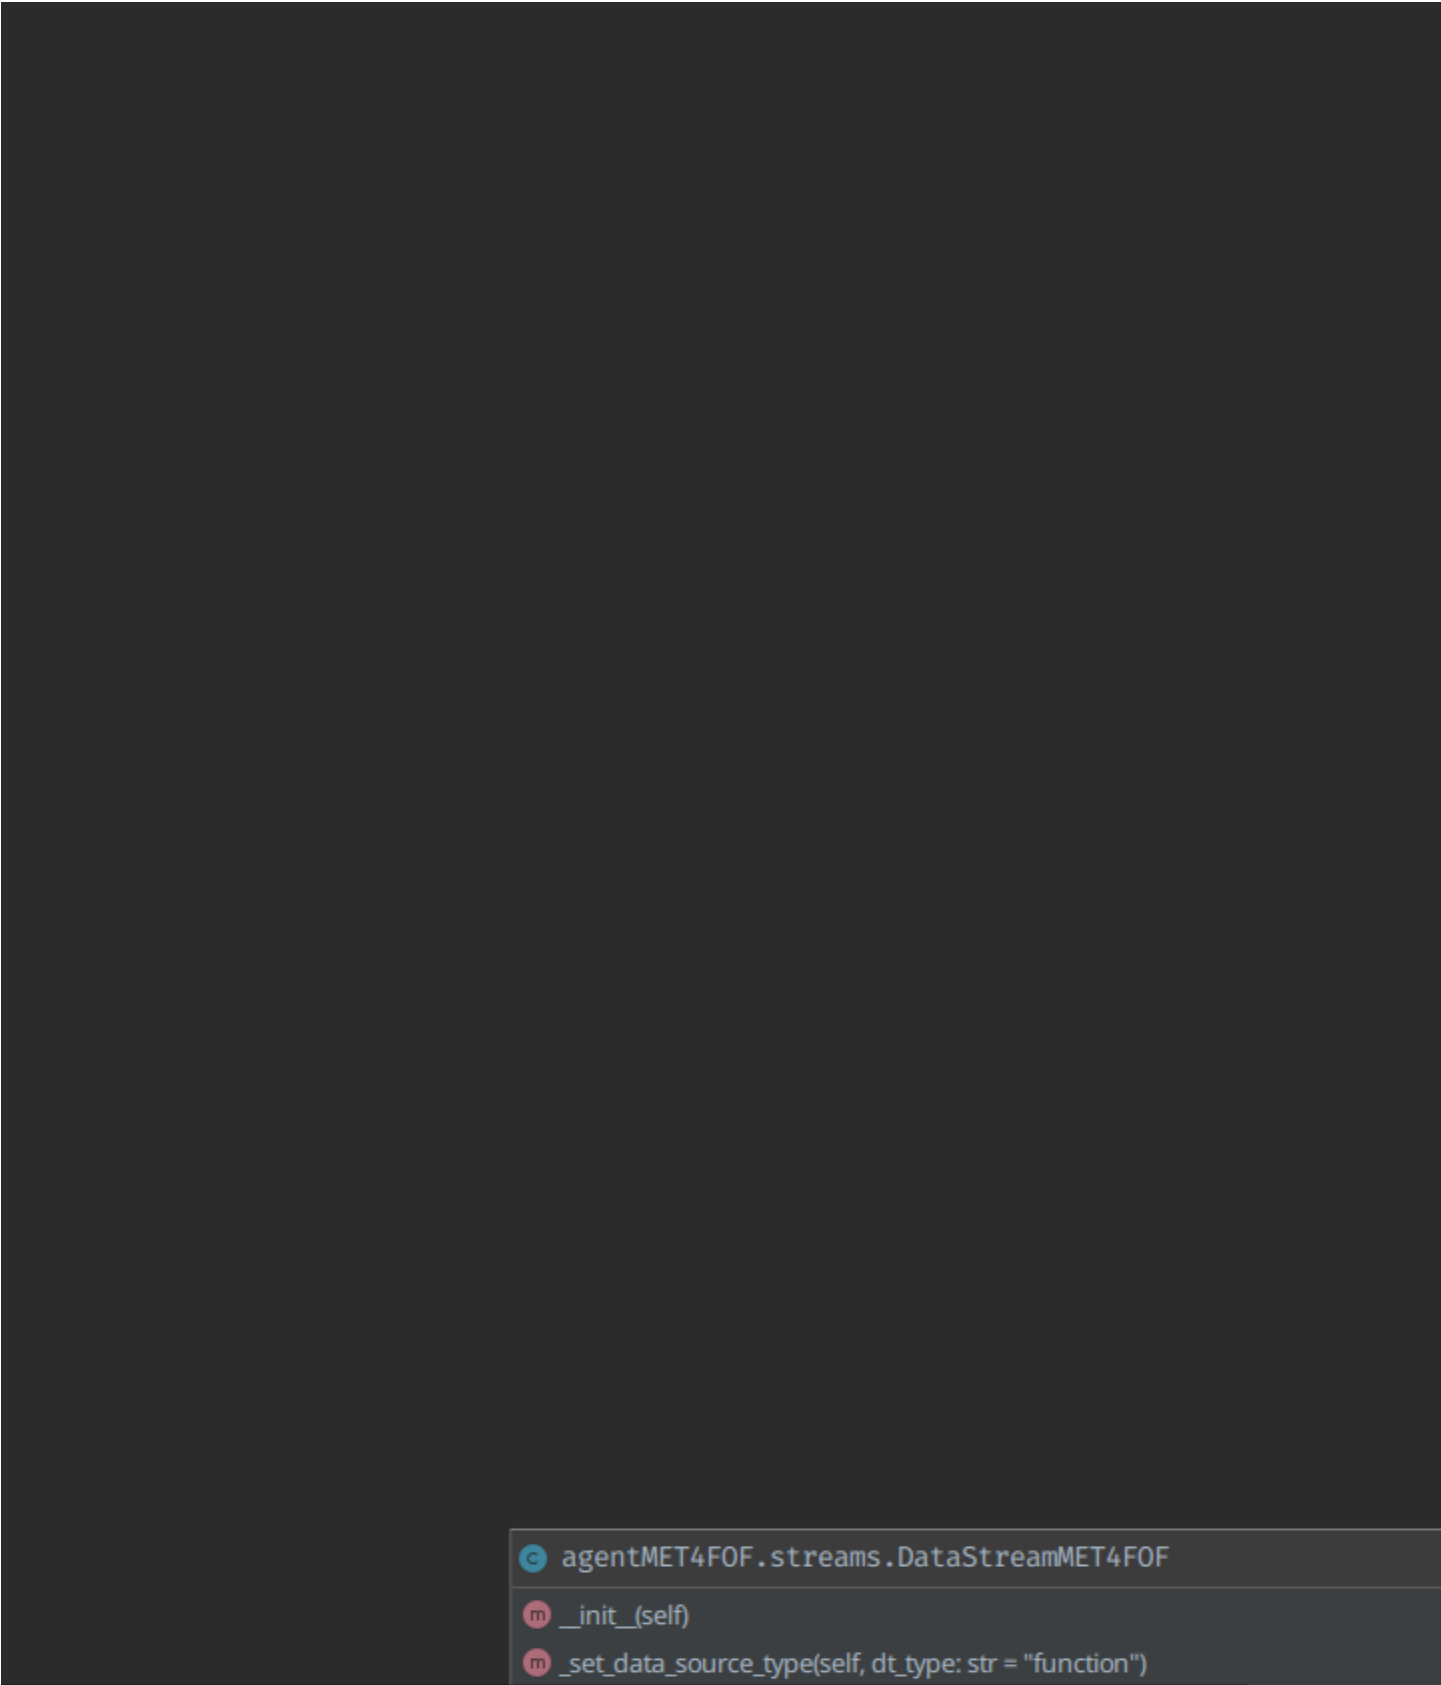

agentMET4FOF.streams.DataStreamMET4FOF

m

__init__(self)

m

_set_data_source_type(self, dt_type: str = "function")

p

metadata(self)

m

set_metadata(self, device_id: str, time_name: str, time

13.6 Creation of the UMLs

We used *PyCharm Professional* to create the diagrams in “Hierarchic Group Layout”.

Date of creation for all diagrams: 2021-02-03 on commit [54a4863](#).

How to contribute to agentMET4FOF

If you want to contribute back to the project, we provide a guide to get the desired system configuration aligned with our development environments. The code you produce should be seamlessly integrable into agentMET4FOF by aligning your work with the established workflows. This guide should work on all platforms and provide everything needed to start developing for agentMET4FOF. Please open an issue or ideally contribute to this guide as a start, if problems or questions arise.

14.1 Guiding principles

The agentMET4FOF development process is based on the following guiding principles:

- actively maintain, ensuring security vulnerabilities or other issues are resolved in a timely manner
- employ state-of-the-art development practices and tools, specifically
 - follow [semantic versioning](#)
 - use [conventional commit messages](#)
 - consider the PEP8 style guide, wherever feasible

14.1.1 Get the code on GitHub and locally

For collaboration, we recommend forking the repository as described [here](#). Simply apply the changes to your fork and open a Pull Request on GitHub as described [here](#). For small changes it will be sufficient to just apply your changes on GitHub and send the PR right away. For more comprehensive work, you should clone your fork and read on carefully.

14.1.2 Initial development setup

This guide assumes you already have a valid runtime environment for agentMET4FOF as described in the [Installation guide](#).

First install the known to work configuration of our dependencies into your virtual environment:

```
(agentMET4FOF_venv) $ pip install -r requirements.txt -r dev-requirements.txt
```

14.1.3 Advised toolset

If you followed the steps for the *initial development setup* you have everything at your hands:

- *Sphinx* for automated generation of [our documentation on ReadTheDocs](#)
- *pytest* as testing framework backed by *hypothesis* and *coverage*.
- *python-semantic-release* in
- [our pipeline on CircleCI](#) . All requirements for contributions are derived from this.

14.1.4 Coding style

As long as the readability of mathematical formulations is not impaired, our code should follow [PEP8](#). We know we can improve on this requirement for the existing code base as well, but all code added should already conform to PEP8. For automating this uniform formatting task we use the Python package *black*. It is easy to handle and [integrable into most common IDEs](#), such that it is automatically applied.

14.1.5 Commit messages

agentMET4FOF commit messages follow some conventions to be easily human and machine-readable.

Commit message structure

[Conventional commit messages](#) are required for the following:

- Releasing automatically according to [semantic versioning](#)
- [Generating a changelog automatically](#)

Parts of the commit messages and links appear in the changelogs of subsequent releases as a result. We use the following types:

- *feat*: for commits that introduce new features (this correlates with MINOR in semantic versioning)
- *docs*: for commits that contribute significantly to documentation
- *fix*: commits in which bugs are fixed (this correlates with PATCH in semantic versioning)
- *test*: Commits that apply significant changes to tests
- *chore*: Commits that affect other non-PyDynamic components (e.g. ReadTheDocs, Git , ...)
- *revert*: commits, which undo previous commits using `git revert`
- *wip*: Commits which are not recognizable as one of the above-mentioned types until later, usually during a PR merge. The merge commit is then marked as the corresponding type.

Of the types mentioned above, the following appear in separate sections of the changelog:

- *Feature: feat*
- *Documentation: docs*
- *Fix: fix*

- *Test: test*

Commit message styling

Based on established community standards, the first line of a commit message should complete the following sentence:

If this commit is applied, it will...

More comprehensive messages should contain an empty line after that and everything else needed starting from the third line. Each line should not exceed 100 characters.

BREAKING CHANGES

Since agentMET4FOF is not yet considered stable, we do not mark BREAKING CHANGES. As a consequence, at any time commits may change parts of agentMET4FOF's public interface so that previously written code may no longer be executable. If this occurs we try though, to mention migration strategies in the corresponding release descriptions.

Commit message examples

For examples please checkout the [Git Log](#).

14.1.6 Testing

We strive to increase [our code coverage](#) with every change introduced. This requires that every new feature and every change to existing features is accompanied by appropriate *pytest* testing. We test the basic components for correctness and, if necessary, the integration into the big picture. It is usually sufficient to create [appropriately named](#) methods in one of the existing modules in the subfolder test. If necessary add a new module that is appropriately named.

14.2 Workflow for adding completely new functionality

In case you add a new feature you generally follow the pattern:

- read through and follow this contribution advices and tips, especially regarding the *advised tool* set and *coding style*
- open an according issue to submit a feature request and get in touch with other agentMET4FOF developers and users
- fork the repository or update the *develop* branch of your fork and create an arbitrary named feature branch from *develop*
- decide which package and module your feature should be integrated into
- if there is no suitable package or module, create a new one and a corresponding module in the *tests* subdirectory with the same name prefixed by *test_*
- if new dependencies are introduced, add them to *setup.py* or *dev-requirements.in*
- during development write tests in alignment with existing test modules, for example *test_addremove_metrological_agents*
- write docstrings in the [NumPy docstring format](#)
- as early as possible create a draft pull request onto the upstream's *develop* branch

- once you think your changes are ready to merge, [request a review](#) from the *agentMET4FOF* collaborators (you will find them in the according drop-down) and [mark your PR as ready for review](#)
- at the latest now you will have the opportunity to review the documentation automatically generated from the docstrings on ReadTheDocs after your reviewers will set up everything
- resolve the conversations and have your pull request merged

14.3 Documentation

The documentation of agentMET4FOF consists of three parts. Every adaptation of an existing feature and every new feature requires adjustments on all three levels:

- user documentation on ReadTheDocs
- examples in the form of Jupyter notebooks for extensive features and Python scripts for features which can be comprehensively described with few lines of commented code
- developer documentation in the form of comments in the code

14.3.1 User documentation

To locally generate a preview of what ReadTheDocs will generate from your docstrings, you can simply execute after activating your virtual environment:

```
(agentMET4FOF_venv) $ sphinx-build docs/ docs/_build
Sphinx v3.1.1 in Verwendung
making output directory...
[...]
build abgeschlossen.

The HTML pages are in docs/_build.
```

After that you can open the file `./docs/build/index.html` relative to the project's root with your favourite browser. Simply re-execute the above command after each change to the docstrings to update your local version of the documentation.

14.3.2 Examples

We want to provide extensive sample material for all agentMET4FOF features in order to simplify the use or even make it possible in the first place. We collect the examples in the subfolder `agentMET4FOF_tutorials`.

14.3.3 Comments in the code

Regarding comments in the code we recommend to invest 45 minutes for the PyCon DE 2019 Talk of Stefan Schwarzer, a 20+-years Python developer: [Commenting code - beyond common wisdom](#).

14.4 Manage dependencies

We use *pip-tools* for dependency management. The root folder contains a *requirements.txt* and a *dev-requirements.txt* for the supported Python version. *pip-tools*' command `pip-compile` finds the right versions from the dependencies listed in *setup.py* and the *dev-requirements.in* and is manually run by the maintainers regularly.

14.5 Licensing

All contributions are released under agentMET4FOF's [GNU Lesser General Public License v3.0](#).

15.1 v0.9.0 (2021-07-08)

15.1.1 Feature

- **agents:** Adds `ampl` and `phase_ini` parameters to `SineGeneratorAgent` ([774a91b](#))
- **streams:** Adds `ampl` and `phase_ini` parameters to `SineGenerator` and `CosineGenerator` ([998b158](#))
- **metrological_streams:** Adds `ampl` and `phase_ini` parameters to `MetrologicalSineGenerator` ([fc9901e](#))
- **redundancy agent:** Adds redundancy agent class to `metrological_agents.py` ([7fbe934](#))
- **MetrologicalGeneratorAgent:** Add an agent to handle generic metrological data streams ([3334762](#))
- **MET4FoF redundancy:** Method `init_parameters1` removed. removed unnecessary comments ([afe47c3](#))
- **MET4FoF redundancy:** Second redundancy tutorial integrated ([c527f33](#))
- **MET4FoF redundancy:** Tutorial 7 added ([caa62ca](#))
- **MET4FoF redundancy:** Met4fof redundancy modules added ([bb3cb6a](#))
- **multiwave:** Added multiwave generator to `metrological_streams.py` ([7b0bf4e](#))
- **multiwave:** Added multiwave generator to `metrological_streams.py` ([035d7c9](#))

15.1.2 Fix

- **tutorial 3:** Replace one of the generator agents' streams by the cosine stream ([2f20183](#))
- **metrological_agents:** `AgentBuffer` import was accidentally removed ([cbec978](#))

15.1.3 Refactor

- **agents and metrological_streams and streams:** Renames ‘ampl’ to ‘amplitude’ and ‘phase_ini’ to ‘initial_phase’ ([d0d8271](#))
- **metrological_agents:** Refactor metrological_agents.py into a package metrological_agents and include classes into agents ([5558008](#))
- **metrological_streams:** Refactor metrological_streams.py into a package metrological_streams and include classes into streams ([9da3744](#))
- **base_streams:** Refactor base_streams.py by applying black ([34ff2d0](#))
- **signal_streams:** Introduce **all** variable into signal_streams.py ([8c62972](#))
- **signal_streams:** Refactor signal_streams.py by applying black ([e604418](#))
- **streams:** Refactor streams.py into a package streams with the modules base_streams and signal_streams ([11368ee](#))
- **signal_agents:** Introduce **all** variable into signal_agents.py ([364702f](#))
- **signal_agents:** Refactor signal_agents.py by applying black ([396a95e](#))
- **base_agents:** Introduce **all** variable into base_agents.py ([34f626b](#))
- **base_agents:** Refactor base_agents.py by applying black and shortening line lengths ([8173324](#))
- **agents:** Refactor agents.py into a package agents with the modules base_agents and signal_agents ([c7bdfae](#))
- **multi_generator:** Replaces amplitude with value in variable names in generator classes ([ee45e1c](#))
- **simple_generator:** Replaces amplitude with value in variable names in generator classes ([f7475ba](#))
- **metrological agents and streams:** Make imports relative ([907cdb2](#))
- **streams:** Replaces amplitude with value in variable names in generator classes ([177b231](#))
- **metrological_streams:** Replaces amplitude with value in variable names ([b4a0118](#))
- **metrological_streams:** Reorder parameters ([b0c465f](#))
- **MetrologicalDataStreamMet4FoF:** Refine MetrologicalDataStreamMet4FoF docstring ([1bfc2a6](#))

15.1.4 Documentation

- **ReadTheDocs:** Adapt documentation to new package and module structure ([ab207c4](#))
- **tutorial 3:** Update fixed notebook with most recent output ([5511079](#))
- **CONTRIBUTING:** Change commit log examples to develop’s commits ([9ee020f](#))
- **CHANGELOG:** Insert actually current changelog into docs ([aff2f6a](#))

[See all commits in this version](#)

15.2 v0.8.1 (2021-06-10)

[See all commits in this version](#)

15.3 v0.8.0 (2021-06-10)

15.3.1 Feature

- **MetrologicalGeneratorAgent:** Rewrote to default metrological generator agent for both streams ([52606d7](#))
- **SineGeneratorAgent:** Added default sine generator agent to metrological_agents.py ([54f4035](#))
- **multiwave_generator:** Multiwave generator added to metrological_streams.py ([682a5ff](#))

15.3.2 Documentation

- **tutorial_7:** Introduce tutorial 7 into ReadTheDocs ([01d7e44](#))
- **tutorial_default_generator:** Add a tutorial for a generic metrologically enabled agent ([7bebef1](#))

[See all commits in this version](#)

15.4 v0.7.0 (2021-06-04)

15.4.1 Feature

- **enhance_ui:** Button to export agent network display as png ([3b41610](#))
- **enhance_subscribe:** Allow special channels for requests ([a88a817](#))

15.4.2 Fix

- **enhance_UI:** Fix bug on callback of agents-network.generateImage ([d9125ab](#))
- **enhance_UI:** Fix importing name for UI example ([58b990b](#))
- **enhance_ui:** Required import visdcc ([f02429e](#))
- **enhance_subscribe:** Specify the plot channel for tests ([1d293e7](#))

15.4.3 Documentation

- **enhance_UI:** Refactor agent_type to agent_name_filter ([a6f8da9](#))
- **enhance_UI:** Add docstring for create_edges_cytoscape method ([b66fcb3](#))
- **enhance_UI:** Intuitive name for toast message function in UI ([c155138](#))
- **enhance_UI:** Rename and add description to UI example ([3a03428](#))
- **enhance_UI:** Refactor tutorial folder on UI example ([360f6da](#))

[See all commits in this version](#)

15.5 v0.6.4 (2021-05-06)

15.5.1 Fix

- **streams:** Remove unnecessary instantiation of `sine_freq` in method `sine_wave_function` (192a6c9)

[See all commits in this version](#)

15.6 v0.6.3 (2021-04-28)

15.6.1 Fix

- **time_series_buffer:** Resolve storing nan values (bbc1ae9)

15.6.2 Documentation

- **metrological_agents:** Reformat two of our docstrings to properly display thos example values in the docs (c56cca9)
- **metrological_agents:** Correct docstrings for `_concatenate()` (eb6a20b)

[See all commits in this version](#)

15.7 v0.6.2 (2021-03-19)

15.7.1 Fix

- **dashboard:** Finally resolve #186 by cleanly shutting down dashboard (9903d15)

15.7.2 Documentation

- **CHANGELOG:** Include CHANGELOG into docs (4ba20d3)

[See all commits in this version](#)

15.8 v0.6.1 (2021-03-12)

15.8.1 Fix

- **metrological_streams:** Fixed computational error for batches of size more than one (686bad5)
- **agents:** Fixed `buffer.clear` method, which did not work anymore after moving from `memory` to `buffer`

15.8.2 Documentation

- **README:** Include the Zenodo DOI banner and add the Citation section ([4a57dd8](#))
- **docstrings:** Seriously improve docstrings and type hinting in `agents.py` and `dashboard/LayoutHelper.py`

[See all commits in this version](#)

16.1 Tutorial 1 - A simple pipeline to plot a signal

First we define a simple pipeline of two agents, of which one will generate a signal (in our case a *SineGeneratorAgent*) and the other one plots the signal on the dashboard (this is always a *MonitorAgent*).

We define a *SineGeneratorAgent* for which we have to override the functions `init_parameters()` & `agent_loop()` to define the new agent's behaviour.

- `init_parameters()` is used to setup the input data stream and potentially other necessary parameters.
- `agent_loop()` will be endlessly repeated until further notice. It will sample by sample extract the input data stream's content and push it to all agents connected to *SineGeneratorAgent*'s output channel by invoking `send_output()`.

The *MonitorAgent* is connected to the *SineGeneratorAgent*'s output channel and per default automatically plots the output.

Each agent has an internal `current_state` which can be used as a switch to change the behaviour of the agent. The available states are listed [here](#).

As soon as all agents are initialized and the connections are set up, the agent network is started by accordingly changing all agents' state simultaneously.

```
[1]: # %load tutorial_1_generator_agent.py
from agentMET4FOF.agents import AgentMET4FOF, AgentNetwork, MonitorAgent
from agentMET4FOF.streams import SineGenerator

class SineGeneratorAgent(AgentMET4FOF):
    """An agent streaming a sine signal

    Takes samples from the :py:mod:`SineGenerator` and pushes them sample by sample
    to connected agents via its output channel.
    """
```

(continues on next page)

(continued from previous page)

```

# The datatype of the stream will be SineGenerator.
_sine_stream: SineGenerator

def init_parameters(self):
    """Initialize the input data

    Initialize the input data stream as an instance of the
    :py:mod:`SineGenerator` class
    """
    self._sine_stream = SineGenerator()

def agent_loop(self):
    """Model the agent's behaviour

    On state *Running* the agent will extract sample by sample the input data
    streams content and push it via invoking :py:method:`AgentMET4FOF.send_output`.
    """
    if self.current_state == "Running":
        sine_data = self._sine_stream.next_sample() # dictionary
        self.send_output(sine_data["quantities"])

def demonstrate_generator_agent_use():
    # Start agent network server.
    agent_network = AgentNetwork()

    # Initialize agents by adding them to the agent network.
    gen_agent = agent_network.add_agent(agentType=SineGeneratorAgent)
    monitor_agent = agent_network.add_agent(agentType=MonitorAgent)

    # Interconnect agents by either way:
    # 1) by agent network.bind_agents(source, target).
    agent_network.bind_agents(gen_agent, monitor_agent)

    # 2) by the agent.bind_output().
    gen_agent.bind_output(monitor_agent)

    # Set all agents' states to "Running".
    agent_network.set_running_state()

    # Allow for shutting down the network after execution
    return agent_network

if __name__ == "__main__":
    demonstrate_generator_agent_use()

```

```

Starting NameServer...
Broadcast server running on 0.0.0.0:9091
NS running on 127.0.0.1:3333 (127.0.0.1)
URI = PYRO:Pyro.NameServer@127.0.0.1:3333

```

```

-----
|
| Your agent network is starting up. Open your browser and |
| visit the agentMET4FOF dashboard on http://127.0.0.1:8050/ |

```

(continues on next page)

(continued from previous page)

```

|
-----
INFO [2021-02-05 19:13:45.925758] (SineGeneratorAgent_1): INITIALIZED
INFO [2021-02-05 19:13:45.960173] (MonitorAgent_1): INITIALIZED
[2021-02-05 19:13:45.975418] (SineGeneratorAgent_1): Connected output module:↵
↵MonitorAgent_1
SET STATE: Running
[2021-02-05 19:13:46.932922] (SineGeneratorAgent_1): Pack time: 0.000957
[2021-02-05 19:13:46.935938] (SineGeneratorAgent_1): Sending: [0.]
[2021-02-05 19:13:46.939035] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↵1', 'data': array([0.]), 'senderType': 'SineGeneratorAgent', 'channel': 'default'}
[2021-02-05 19:13:46.941337] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↵
↵array([0.])}
[2021-02-05 19:13:46.942394] (MonitorAgent_1): Tproc: 0.002278
[2021-02-05 19:13:47.932181] (SineGeneratorAgent_1): Pack time: 0.000614
[2021-02-05 19:13:47.935312] (SineGeneratorAgent_1): Sending: [0.06279052]
[2021-02-05 19:13:47.936553] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↵1', 'data': array([0.06279052]), 'senderType': 'SineGeneratorAgent', 'channel':
↵'default'}
[2021-02-05 19:13:47.941367] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↵
↵array([0.          , 0.06279052])}
[2021-02-05 19:13:47.942190] (MonitorAgent_1): Tproc: 0.004357
[2021-02-05 19:13:48.931650] (SineGeneratorAgent_1): Pack time: 0.00047
[2021-02-05 19:13:48.933397] (SineGeneratorAgent_1): Sending: [0.12533323]
[2021-02-05 19:13:48.934297] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↵1', 'data': array([0.12533323]), 'senderType': 'SineGeneratorAgent', 'channel':
↵'default'}
[2021-02-05 19:13:48.936482] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↵
↵array([0.          , 0.06279052, 0.12533323])}
[2021-02-05 19:13:48.936997] (MonitorAgent_1): Tproc: 0.002201
[2021-02-05 19:13:49.932143] (SineGeneratorAgent_1): Pack time: 0.000937
[2021-02-05 19:13:49.940442] (SineGeneratorAgent_1): Sending: [0.18738131]
[2021-02-05 19:13:49.934471] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↵1', 'data': array([0.18738131]), 'senderType': 'SineGeneratorAgent', 'channel':
↵'default'}
[2021-02-05 19:13:49.938767] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↵
↵array([0.          , 0.06279052, 0.12533323, 0.18738131])}
[2021-02-05 19:13:49.939977] (MonitorAgent_1): Tproc: 0.004969
[2021-02-05 19:13:50.930904] (SineGeneratorAgent_1): Pack time: 0.000255
[2021-02-05 19:13:50.931636] (SineGeneratorAgent_1): Sending: [0.24868989]
[2021-02-05 19:13:50.932383] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↵1', 'data': array([0.24868989]), 'senderType': 'SineGeneratorAgent', 'channel':
↵'default'}
[2021-02-05 19:13:50.933944] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↵
↵array([0.          , 0.06279052, 0.12533323, 0.18738131, 0.24868989])}
[2021-02-05 19:13:50.934185] (MonitorAgent_1): Tproc: 0.001522
NS shut down.
[2021-02-05 19:13:51.932632] (SineGeneratorAgent_1): Pack time: 0.001127
[2021-02-05 19:13:51.935690] (SineGeneratorAgent_1): Sending: [0.30901699]
[2021-02-05 19:13:51.935544] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↵1', 'data': array([0.30901699]), 'senderType': 'SineGeneratorAgent', 'channel':
↵'default'}
[2021-02-05 19:13:51.944128] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↵
↵array([0.          , 0.06279052, 0.12533323, 0.18738131, 0.24868989,
0.30901699])}
[2021-02-05 19:13:51.944378] (MonitorAgent_1): Tproc: 0.008396

```

(continues on next page)

(continued from previous page)

```
[2021-02-05 19:13:52.930087] (SineGeneratorAgent_1): Pack time: 0.000108
[2021-02-05 19:13:52.930343] (SineGeneratorAgent_1): Sending: [0.36812455]
[2021-02-05 19:13:52.930548] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↪1', 'data': array([0.36812455]), 'senderType': 'SineGeneratorAgent', 'channel':
↪'default'}
```

```
[2021-02-05 19:13:52.930905] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↪
↪array([0.          , 0.06279052, 0.12533323, 0.18738131, 0.24868989,
↪0.30901699, 0.36812455])}
```

```
[2021-02-05 19:13:52.931004] (MonitorAgent_1): Tproc: 0.000381
[2021-02-05 19:13:53.930135] (SineGeneratorAgent_1): Pack time: 0.000144
[2021-02-05 19:13:53.930526] (SineGeneratorAgent_1): Sending: [0.42577929]
[2021-02-05 19:13:53.930537] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↪1', 'data': array([0.42577929]), 'senderType': 'SineGeneratorAgent', 'channel':
↪'default'}
```

```
[2021-02-05 19:13:53.930940] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↪
↪array([0.          , 0.06279052, 0.12533323, 0.18738131, 0.24868989,
↪0.30901699, 0.36812455, 0.42577929])}
```

```
[2021-02-05 19:13:53.930993] (MonitorAgent_1): Tproc: 0.00038
[2021-02-05 19:13:54.932072] (SineGeneratorAgent_1): Pack time: 0.0009
[2021-02-05 19:13:54.934391] (SineGeneratorAgent_1): Sending: [0.48175367]
[2021-02-05 19:13:54.934275] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↪1', 'data': array([0.48175367]), 'senderType': 'SineGeneratorAgent', 'channel':
↪'default'}
```

```
[2021-02-05 19:13:54.936874] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↪
↪array([0.          , 0.06279052, 0.12533323, 0.18738131, 0.24868989,
↪0.30901699, 0.36812455, 0.42577929, 0.48175367])}
```

```
[2021-02-05 19:13:54.937315] (MonitorAgent_1): Tproc: 0.002635
[2021-02-05 19:13:55.931558] (SineGeneratorAgent_1): Pack time: 0.000454
[2021-02-05 19:13:55.933193] (SineGeneratorAgent_1): Sending: [0.53582679]
[2021-02-05 19:13:55.933792] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↪1', 'data': array([0.53582679]), 'senderType': 'SineGeneratorAgent', 'channel':
↪'default'}
```

```
[2021-02-05 19:13:55.936039] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↪
↪array([0.          , 0.06279052, 0.12533323, 0.18738131, 0.24868989,
↪0.30901699, 0.36812455, 0.42577929, 0.48175367, 0.53582679])}
```

```
[2021-02-05 19:13:55.936606] (MonitorAgent_1): Tproc: 0.002345
```

16.2 Tutorial 2 - A simple pipeline with signal postprocessing.

Here we demonstrate how to build a *MathAgent* as an intermediate to process the *SineGeneratorAgent*'s output before plotting. Subsequently, a *MultiMathAgent* is built to show the ability to send a dictionary of multiple fields to the recipient. We provide a custom `on_received_message()` function, which is called every time a message is received from input agents.

The received message is a dictionary of the form:

```
{
  'from': agent_name,
  'data': data,
  'senderType': agent_class_name,
  'channel': 'channel_name'
}
```

By default, 'channel' is set to "default", however a custom channel can be set when needed, which is demonstrated in the next tutorial.


```
[1]: # %load tutorial_2_math_agent.py
from agentMET4FOF.agents import (
    AgentMET4FOF,
    AgentNetwork,
    MonitorAgent,
    SineGeneratorAgent,
)

class MathAgent(AgentMET4FOF):
    def on_received_message(self, message):
        data = self.divide_by_two(message["data"])
        self.send_output(data)

    # Define simple math functions.
    @staticmethod
    def divide_by_two(numerator: float) -> float:
        return numerator / 2

class MultiMathAgent(AgentMET4FOF):

    _minus_param: float
    _plus_param: float

    def init_parameters(self, minus_param=0.5, plus_param=0.5):
        self._minus_param = minus_param
        self._plus_param = plus_param

    def on_received_message(self, message):
        minus_data = self.minus(message["data"], self._minus_param)
        plus_data = self.plus(message["data"], self._plus_param)

        self.send_output({"minus": minus_data, "plus": plus_data})

    @staticmethod
    def minus(minuend: float, subtrahend: float) -> float:
        return minuend - subtrahend

    @staticmethod
    def plus(summand_1: float, summand_2: float) -> float:
        return summand_1 + summand_2

def main():
    # start agent network server
    agentNetwork = AgentNetwork()
    # init agents
    gen_agent = agentNetwork.add_agent(agentType=SineGeneratorAgent)
    math_agent = agentNetwork.add_agent(agentType=MathAgent)
    multi_math_agent = agentNetwork.add_agent(agentType=MultiMathAgent)
    monitor_agent = agentNetwork.add_agent(agentType=MonitorAgent)
    # connect agents : We can connect multiple agents to any particular agent
    agentNetwork.bind_agents(gen_agent, math_agent)
    agentNetwork.bind_agents(gen_agent, multi_math_agent)
    # connect
    agentNetwork.bind_agents(gen_agent, monitor_agent)
```

(continues on next page)

(continued from previous page)

```

agentNetwork.bind_agents(math_agent, monitor_agent)
agentNetwork.bind_agents(multi_math_agent, monitor_agent)
# set all agents states to "Running"
agentNetwork.set_running_state()

# allow for shutting down the network after execution
return agentNetwork

if __name__ == "__main__":
    main()

```

Starting NameServer...
Broadcast server running on 0.0.0.0:9091
NS running on 127.0.0.1:3333 (127.0.0.1)
URI = PYRO:Pyro.NameServer@127.0.0.1:3333

```

-----
|                                     |
| Your agent network is starting up. Open your browser and |
| visit the agentMET4FOF dashboard on http://127.0.0.1:8050/ |
|                                     |
|                                     |
-----

```

```

INFO [2021-02-05 19:18:07.585019] (SineGeneratorAgent_1): INITIALIZED
INFO [2021-02-05 19:18:07.619684] (MathAgent_1): INITIALIZED
INFO [2021-02-05 19:18:07.654192] (MultiMathAgent_1): INITIALIZED
INFO [2021-02-05 19:18:07.691566] (MonitorAgent_1): INITIALIZED
[2021-02-05 19:18:07.706815] (SineGeneratorAgent_1): Connected output module:↵
↵MathAgent_1
[2021-02-05 19:18:07.714664] (SineGeneratorAgent_1): Connected output module:↵
↵MultiMathAgent_1
[2021-02-05 19:18:07.724529] (SineGeneratorAgent_1): Connected output module:↵
↵MonitorAgent_1
[2021-02-05 19:18:07.738462] (MathAgent_1): Connected output module: MonitorAgent_1
[2021-02-05 19:18:07.750583] (MultiMathAgent_1): Connected output module:↵
↵MonitorAgent_1
SET STATE: Running
[2021-02-05 19:18:08.589720] (SineGeneratorAgent_1): Pack time: 0.000765
[2021-02-05 19:18:08.592546] (MathAgent_1): Received: {'from': 'SineGeneratorAgent_1',
↵ 'data': array([0.]), 'senderType': 'SineGeneratorAgent', 'channel': 'default'}
[2021-02-05 19:18:08.595246] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↵ 1', 'data': array([0.]), 'senderType': 'SineGeneratorAgent', 'channel': 'default'}
[2021-02-05 19:18:08.596230] (MultiMathAgent_1): Received: {'from':
↵ 'SineGeneratorAgent_1', 'data': array([0.]), 'senderType': 'SineGeneratorAgent',
↵ 'channel': 'default'}
[2021-02-05 19:18:08.595257] (SineGeneratorAgent_1): Sending: [0.]
[2021-02-05 19:18:08.593186] (MathAgent_1): Pack time: 0.000388
[2021-02-05 19:18:08.600139] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↵
↵ array([0.])}
[2021-02-05 19:18:08.596854] (MultiMathAgent_1): Pack time: 0.000383
[2021-02-05 19:18:08.597959] (MultiMathAgent_1): Sending: {'minus': array([-0.5]),
↵ 'plus': array([0.5])}
[2021-02-05 19:18:08.593788] (MathAgent_1): Sending: [0.]
[2021-02-05 19:18:08.600521] (MonitorAgent_1): Tproc: 0.000931
[2021-02-05 19:18:08.598126] (MultiMathAgent_1): Tproc: 0.001735
[2021-02-05 19:18:08.594015] (MathAgent_1): Tproc: 0.001276

```

(continues on next page)

(continued from previous page)

```

[2021-02-05 19:18:08.606396] (MonitorAgent_1): Received: {'from': 'MathAgent_1', 'data':
→ array([0.]), 'senderType': 'MathAgent', 'channel': 'default'}
[2021-02-05 19:18:08.607428] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':
→ array([0.]), 'MathAgent_1': array([0.])}
[2021-02-05 19:18:08.607807] (MonitorAgent_1): Tproc: 0.001189
[2021-02-05 19:18:08.613784] (MonitorAgent_1): Received: {'from': 'MultiMathAgent_1',
→ 'data': {'minus': array([-0.5]), 'plus': array([0.5])}, 'senderType':
→ 'MultiMathAgent', 'channel': 'default'}
[2021-02-05 19:18:08.620942] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':
→ array([0.]), 'MathAgent_1': array([0.]), 'MultiMathAgent_1': {'minus': array([-0.
→ 5]), 'plus': array([0.5])}}
[2021-02-05 19:18:08.625194] (MonitorAgent_1): Tproc: 0.01115
[2021-02-05 19:18:09.590078] (SineGeneratorAgent_1): Pack time: 0.000561
[2021-02-05 19:18:09.592887] (SineGeneratorAgent_1): Sending: [0.06279052]
[2021-02-05 19:18:09.593616] (MathAgent_1): Received: {'from': 'SineGeneratorAgent_1',
→ 'data': array([0.06279052]), 'senderType': 'SineGeneratorAgent', 'channel':
→ 'default'}
[2021-02-05 19:18:09.593134] (MultiMathAgent_1): Received: {'from':
→ 'SineGeneratorAgent_1', 'data': array([0.06279052]), 'senderType':
→ 'SineGeneratorAgent', 'channel': 'default'}
[2021-02-05 19:18:09.598873] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
→ 1', 'data': array([0.06279052]), 'senderType': 'SineGeneratorAgent', 'channel':
→ 'default'}
[2021-02-05 19:18:09.608525] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':
→ array([0.06279052]), 'MathAgent_1': array([0.]), 'MultiMathAgent_1': {'
→ 'minus': array([-0.5]), 'plus': array([0.5])}}
[2021-02-05 19:18:09.594706] (MathAgent_1): Pack time: 0.000551
[2021-02-05 19:18:09.596935] (MultiMathAgent_1): Pack time: 0.001516
[2021-02-05 19:18:09.613332] (MonitorAgent_1): Tproc: 0.013659
[2021-02-05 19:18:09.596653] (MathAgent_1): Sending: [0.03139526]
[2021-02-05 19:18:09.613588] (MultiMathAgent_1): Sending: {'minus': array([-0.
→ 43720948]), 'plus': array([0.56279052])}
[2021-02-05 19:18:09.620995] (MonitorAgent_1): Received: {'from': 'MathAgent_1', 'data':
→ array([0.03139526]), 'senderType': 'MathAgent', 'channel': 'default'}
[2021-02-05 19:18:09.597111] (MathAgent_1): Tproc: 0.003054
[2021-02-05 19:18:09.616401] (MultiMathAgent_1): Tproc: 0.022068
[2021-02-05 19:18:09.631221] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':
→ array([0.06279052]), 'MathAgent_1': array([0.03139526]),
→ 'MultiMathAgent_1': {'minus': array([-0.5]), 'plus': array([0.5])}}
[2021-02-05 19:18:09.632022] (MonitorAgent_1): Tproc: 0.0105
[2021-02-05 19:18:09.637249] (MonitorAgent_1): Received: {'from': 'MultiMathAgent_1',
→ 'data': {'minus': array([-0.43720948]), 'plus': array([0.56279052])}, 'senderType':
→ 'MultiMathAgent', 'channel': 'default'}
[2021-02-05 19:18:09.651789] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':
→ array([0.06279052]), 'MathAgent_1': array([0.03139526]),
→ 'MultiMathAgent_1': {'minus': array([-0.5, -0.43720948]), 'plus': array([0.5,
→ 0.56279052])}}
[2021-02-05 19:18:09.652908] (MonitorAgent_1): Tproc: 0.014285

```

16.3 Tutorial 3 - An advanced pipeline with multichannel signals.

We can use different channels for the receiver to handle specifically each channel name. This can be useful for example in splitting train and test channels in machine learning. Then, the user will need to implement specific handling of each channel in the receiving agent.

In this example, the *MultiGeneratorAgent* is used to send two different types of data - Sine and Cosine generator. This is done via specifying `send_output (channel="sine")` and `send_output (channel="cosine")`.

Then on the receiving end, the `on_received_message ()` function checks for `message [' channel ']` to handle it separately.

Note that by default, *MonitorAgent* is only subscribed to the "default" channel. Hence, it will not respond to the "cosine" and "sine" channel.

```
[2]: # %load tutorial_3_multi_channel.py
from agentMET4FOF.agents import AgentMET4FOF, AgentNetwork, MonitorAgent
from agentMET4FOF.streams import SineGenerator, CosineGenerator

class MultiGeneratorAgent (AgentMET4FOF):

    _sine_stream: SineGenerator
    _cos_stream: CosineGenerator

    def init_parameters(self):
        self._sine_stream = SineGenerator()
        self._cos_stream = CosineGenerator()

    def agent_loop(self):
        if self.current_state == "Running":
            sine_data = self._sine_stream.next_sample() # dictionary
            cosine_data = self._cos_stream.next_sample() # dictionary
            self.send_output(sine_data["quantities"], channel="sine")
            self.send_output(cosine_data["quantities"], channel="cosine")

class MultiOutputMathAgent (AgentMET4FOF):

    _minus_param: float
    _plus_param: float

    def init_parameters(self, minus_param=0.5, plus_param=0.5):
        self._minus_param = minus_param
        self._plus_param = plus_param

    def on_received_message(self, message):
        """
        Checks for message['channel'] and handles them separately
        Acceptable channels are "cosine" and "sine"
        """
        if message["channel"] == "cosine":
            minus_data = self.minus(message["data"], self._minus_param)
            self.send_output({"cosine_minus": minus_data})
        elif message["channel"] == "sine":
            plus_data = self.plus(message["data"], self._plus_param)
            self.send_output({"sine_plus": plus_data})

    @staticmethod
    def minus(data, minus_val):
        return data - minus_val

    @staticmethod
    def plus(data, plus_val):
```

(continues on next page)

(continued from previous page)

```

    return data + plus_val

def main():
    # start agent network server
    agentNetwork = AgentNetwork()

    # init agents
    gen_agent = agentNetwork.add_agent(agentType=MultiGeneratorAgent)
    multi_math_agent = agentNetwork.add_agent(agentType=MultiOutputMathAgent)
    monitor_agent = agentNetwork.add_agent(agentType=MonitorAgent)

    # connect agents : We can connect multiple agents to any particular agent
    # However the agent needs to implement handling multiple inputs
    agentNetwork.bind_agents(gen_agent, multi_math_agent, channel=["sine", "cosine"])
    agentNetwork.bind_agents(multi_math_agent, monitor_agent)

    # set all agents states to "Running"
    agentNetwork.set_running_state()

    # allow for shutting down the network after execution
    return agentNetwork

if __name__ == "__main__":
    main()

```

```

Starting NameServer...
Broadcast server running on 0.0.0.0:9091
NS running on 127.0.0.1:3333 (127.0.0.1)
URI = PYRO:Pyro.NameServer@127.0.0.1:3333
INFO [2021-07-01 15:01:52.175496] (MultiGeneratorAgent_1): INITIALIZED
INFO [2021-07-01 15:01:52.210891] (MultiOutputMathAgent_1): INITIALIZED
INFO [2021-07-01 15:01:52.249834] (MonitorAgent_1): INITIALIZED
[2021-07-01 15:01:52.267296] (MultiGeneratorAgent_1): Connected output module:
↳MultiOutputMathAgent_1
[2021-07-01 15:01:52.281811] (MultiOutputMathAgent_1): Connected output module:
↳MonitorAgent_1

```

```

-----
|
| Your agent network is starting up. Open your browser and |
| visit the agentMET4FOF dashboard on http://127.0.0.1:8050/ |
|
|
-----

```

```

SET STATE:    Running
[2021-07-01 15:01:53.182613] (MultiGeneratorAgent_1): Pack time: 0.001315
[2021-07-01 15:01:53.185913] (MultiGeneratorAgent_1): Sending: [0.]
[2021-07-01 15:01:53.188089] (MultiOutputMathAgent_1): Received: {'from':
↳'MultiGeneratorAgent_1', 'data': array([0.]), 'senderType': 'MultiGeneratorAgent',
↳'channel': 'sine'}
[2021-07-01 15:01:53.198228] (MonitorAgent_1): Received: {'from':
↳'MultiOutputMathAgent_1', 'data': {'sine_plus': array([0.5])}, 'senderType':
↳'MultiOutputMathAgent', 'channel': 'default'}
[2021-07-01 15:01:53.187680] (MultiGeneratorAgent_1): Pack time: 0.000927

```

(continues on next page)

(continued from previous page)

```

[2021-07-01 15:01:53.190148] (MultiOutputMathAgent_1): Pack time: 0.001023
[2021-07-01 15:01:53.201389] (MonitorAgent_1): Buffer: {'MultiOutputMathAgent_1': {
↪ 'sine_plus': array([0.5])}}
[2021-07-01 15:01:53.191978] (MultiGeneratorAgent_1): Sending: [1.]
[2021-07-01 15:01:53.202160] (MultiOutputMathAgent_1): Sending: {'sine_plus': ↪
↪ array([0.5])}
[2021-07-01 15:01:53.205550] (MonitorAgent_1): Tproc: 0.006233
[2021-07-01 15:01:53.222512] (MonitorAgent_1): Received: {'from':
↪ 'MultiOutputMathAgent_1', 'data': {'cosine_minus': array([0.5])}, 'senderType':
↪ 'MultiOutputMathAgent', 'channel': 'default'}
[2021-07-01 15:01:53.203843] (MultiOutputMathAgent_1): Tproc: 0.014867
[2021-07-01 15:01:53.225894] (MonitorAgent_1): Buffer: {'MultiOutputMathAgent_1': {
↪ 'sine_plus': array([0.5]), 'cosine_minus': array([0.5])}}
[2021-07-01 15:01:53.206881] (MultiOutputMathAgent_1): Received: {'from':
↪ 'MultiGeneratorAgent_1', 'data': array([1.]), 'senderType': 'MultiGeneratorAgent',
↪ 'channel': 'cosine'}
[2021-07-01 15:01:53.226755] (MonitorAgent_1): Tproc: 0.003277
[2021-07-01 15:01:53.214200] (MultiOutputMathAgent_1): Pack time: 0.006701
[2021-07-01 15:01:53.216159] (MultiOutputMathAgent_1): Sending: {'cosine_minus': ↪
↪ array([0.5])}
[2021-07-01 15:01:53.216622] (MultiOutputMathAgent_1): Tproc: 0.009249
[2021-07-01 15:01:54.184818] (MultiGeneratorAgent_1): Pack time: 0.000496
[2021-07-01 15:01:54.186555] (MultiGeneratorAgent_1): Sending: [0.58778525]
[2021-07-01 15:01:54.187543] (MultiOutputMathAgent_1): Received: {'from':
↪ 'MultiGeneratorAgent_1', 'data': array([0.58778525]), 'senderType':
↪ 'MultiGeneratorAgent', 'channel': 'sine'}
[2021-07-01 15:01:54.191606] (MonitorAgent_1): Received: {'from':
↪ 'MultiOutputMathAgent_1', 'data': {'sine_plus': array([1.08778525])}, 'senderType':
↪ 'MultiOutputMathAgent', 'channel': 'default'}
[2021-07-01 15:01:54.188158] (MultiGeneratorAgent_1): Pack time: 0.001101
[2021-07-01 15:01:54.188642] (MultiOutputMathAgent_1): Pack time: 0.000556
[2021-07-01 15:01:54.198646] (MonitorAgent_1): Buffer: {'MultiOutputMathAgent_1': {
↪ 'sine_plus': array([0.5, 1.08778525]), 'cosine_minus': array([0.5])}}
[2021-07-01 15:01:54.192076] (MultiGeneratorAgent_1): Sending: [0.99802673]
[2021-07-01 15:01:54.193649] (MultiOutputMathAgent_1): Sending: {'sine_plus': ↪
↪ array([1.08778525])}
[2021-07-01 15:01:54.199203] (MonitorAgent_1): Tproc: 0.007071
[2021-07-01 15:01:54.206693] (MonitorAgent_1): Received: {'from':
↪ 'MultiOutputMathAgent_1', 'data': {'cosine_minus': array([0.49802673])}, 'senderType
↪ ': 'MultiOutputMathAgent', 'channel': 'default'}
[2021-07-01 15:01:54.194338] (MultiOutputMathAgent_1): Tproc: 0.00634
[2021-07-01 15:01:54.211962] (MonitorAgent_1): Buffer: {'MultiOutputMathAgent_1': {
↪ 'sine_plus': array([0.5, 1.08778525]), 'cosine_minus': array([0.5, 0.
↪ 49802673])}}
[2021-07-01 15:01:54.198345] (MultiOutputMathAgent_1): Received: {'from':
↪ 'MultiGeneratorAgent_1', 'data': array([0.99802673]), 'senderType':
↪ 'MultiGeneratorAgent', 'channel': 'cosine'}
[2021-07-01 15:01:54.212776] (MonitorAgent_1): Tproc: 0.004846
[2021-07-01 15:01:54.201066] (MultiOutputMathAgent_1): Pack time: 0.001228
[2021-07-01 15:01:54.203439] (MultiOutputMathAgent_1): Sending: {'cosine_minus': ↪
↪ array([0.49802673])}
[2021-07-01 15:01:54.204268] (MultiOutputMathAgent_1): Tproc: 0.004457
[2021-07-01 15:01:55.178989] (MultiGeneratorAgent_1): Pack time: 0.000235
[2021-07-01 15:01:55.179521] (MultiGeneratorAgent_1): Sending: [0.95105652]
[2021-07-01 15:01:55.179758] (MultiOutputMathAgent_1): Received: {'from':
↪ 'MultiGeneratorAgent_1', 'data': array([0.95105652]), 'senderType':
↪ 'MultiGeneratorAgent', 'channel': 'sine'}

```

(continues on next page)

(continued from previous page)

```

[2021-07-01 15:01:55.180977] (MonitorAgent_1): Received: {'from':
→ 'MultiOutputMathAgent_1', 'data': {'sine_plus': array([1.45105652])}, 'senderType':
→ 'MultiOutputMathAgent', 'channel': 'default'}
[2021-07-01 15:01:55.179716] (MultiGeneratorAgent_1): Pack time: 8.7e-05
[2021-07-01 15:01:55.179960] (MultiOutputMathAgent_1): Pack time: 9e-05
[2021-07-01 15:01:55.181787] (MonitorAgent_1): Buffer: {'MultiOutputMathAgent_1': {
→ 'sine_plus': array([0.5          , 1.08778525, 1.45105652]), 'cosine_minus': array([0.
→ 5          , 0.49802673])}}
[2021-07-01 15:01:55.179963] (MultiGeneratorAgent_1): Sending: [0.9921147]
[2021-07-01 15:01:55.180249] (MultiOutputMathAgent_1): Sending: {'sine_plus':
→ array([1.45105652])}
[2021-07-01 15:01:55.181918] (MonitorAgent_1): Tproc: 0.000833
[2021-07-01 15:01:55.183711] (MonitorAgent_1): Received: {'from':
→ 'MultiOutputMathAgent_1', 'data': {'cosine_minus': array([0.4921147])}, 'senderType
→ ': 'MultiOutputMathAgent', 'channel': 'default'}
[2021-07-01 15:01:55.180316] (MultiOutputMathAgent_1): Tproc: 0.000466
[2021-07-01 15:01:55.184531] (MonitorAgent_1): Buffer: {'MultiOutputMathAgent_1': {
→ 'sine_plus': array([0.5          , 1.08778525, 1.45105652]), 'cosine_minus': array([0.
→ 5          , 0.49802673, 0.4921147 ])}}
[2021-07-01 15:01:55.181834] (MultiOutputMathAgent_1): Received: {'from':
→ 'MultiGeneratorAgent_1', 'data': array([0.9921147]), 'senderType':
→ 'MultiGeneratorAgent', 'channel': 'cosine'}
[2021-07-01 15:01:55.184744] (MonitorAgent_1): Tproc: 0.000897
[2021-07-01 15:01:55.182130] (MultiOutputMathAgent_1): Pack time: 0.000143
[2021-07-01 15:01:55.182865] (MultiOutputMathAgent_1): Sending: {'cosine_minus':
→ array([0.4921147])}
[2021-07-01 15:01:55.183034] (MultiOutputMathAgent_1): Tproc: 0.001075
NS shut down.
[2021-07-01 15:01:56.180795] (MultiGeneratorAgent_1): Pack time: 0.000474
[2021-07-01 15:01:56.182502] (MultiGeneratorAgent_1): Sending: [0.95105652]
[2021-07-01 15:01:56.184165] (MultiOutputMathAgent_1): Received: {'from':
→ 'MultiGeneratorAgent_1', 'data': array([0.95105652]), 'senderType':
→ 'MultiGeneratorAgent', 'channel': 'sine'}
[2021-07-01 15:01:56.188323] (MonitorAgent_1): Received: {'from':
→ 'MultiOutputMathAgent_1', 'data': {'sine_plus': array([1.45105652])}, 'senderType':
→ 'MultiOutputMathAgent', 'channel': 'default'}
[2021-07-01 15:01:56.183937] (MultiGeneratorAgent_1): Pack time: 0.000939
[2021-07-01 15:01:56.186133] (MultiOutputMathAgent_1): Pack time: 0.001328
[2021-07-01 15:01:56.193199] (MonitorAgent_1): Buffer: {'MultiOutputMathAgent_1': {
→ 'sine_plus': array([0.5          , 1.08778525, 1.45105652, 1.45105652]), 'cosine_minus
→ ': array([0.5          , 0.49802673, 0.4921147 ])}}
[2021-07-01 15:01:56.186587] (MultiGeneratorAgent_1): Sending: [0.98228725]
[2021-07-01 15:01:56.188313] (MultiOutputMathAgent_1): Sending: {'sine_plus':
→ array([1.45105652])}
[2021-07-01 15:01:56.194104] (MonitorAgent_1): Tproc: 0.005235
[2021-07-01 15:01:56.197336] (MonitorAgent_1): Received: {'from':
→ 'MultiOutputMathAgent_1', 'data': {'cosine_minus': array([0.48228725])}, 'senderType
→ ': 'MultiOutputMathAgent', 'channel': 'default'}
[2021-07-01 15:01:56.189350] (MultiOutputMathAgent_1): Tproc: 0.00465
[2021-07-01 15:01:56.202432] (MonitorAgent_1): Buffer: {'MultiOutputMathAgent_1': {
→ 'sine_plus': array([0.5          , 1.08778525, 1.45105652, 1.45105652]), 'cosine_minus
→ ': array([0.5          , 0.49802673, 0.4921147 , 0.48228725])}}
[2021-07-01 15:01:56.192299] (MultiOutputMathAgent_1): Received: {'from':
→ 'MultiGeneratorAgent_1', 'data': array([0.98228725]), 'senderType':
→ 'MultiGeneratorAgent', 'channel': 'cosine'}
[2021-07-01 15:01:56.203192] (MonitorAgent_1): Tproc: 0.005025
[2021-07-01 15:01:56.194134] (MultiOutputMathAgent_1): Pack time: 0.001021

```

(continues on next page)

(continued from previous page)

```

[2021-07-01 15:01:56.196129] (MultiOutputMathAgent_1): Sending: {'cosine_minus':
↪array([0.48228725])}
[2021-07-01 15:01:56.196786] (MultiOutputMathAgent_1): Tproc: 0.003774
[2021-07-01 15:01:57.181941] (MultiGeneratorAgent_1): Pack time: 0.001002
[2021-07-01 15:01:57.187711] (MultiOutputMathAgent_1): Received: {'from':
↪'MultiGeneratorAgent_1', 'data': array([0.58778525]), 'senderType':
↪'MultiGeneratorAgent', 'channel': 'sine'}
[2021-07-01 15:01:57.201793] (MonitorAgent_1): Received: {'from':
↪'MultiOutputMathAgent_1', 'data': {'sine_plus': array([1.08778525])}, 'senderType':
↪'MultiOutputMathAgent', 'channel': 'default'}
[2021-07-01 15:01:57.184197] (MultiGeneratorAgent_1): Sending: [0.58778525]
[2021-07-01 15:01:57.193170] (MultiOutputMathAgent_1): Pack time: 0.004933
[2021-07-01 15:01:57.207510] (MonitorAgent_1): Buffer: {'MultiOutputMathAgent_1': {
↪'sine_plus': array([0.5      , 1.08778525, 1.45105652, 1.45105652, 1.08778525]),
↪'cosine_minus': array([0.5      , 0.49802673, 0.4921147 , 0.48228725])}}
[2021-07-01 15:01:57.193366] (MultiGeneratorAgent_1): Pack time: 0.008673
[2021-07-01 15:01:57.194990] (MultiOutputMathAgent_1): Sending: {'sine_plus':
↪array([1.08778525])}
[2021-07-01 15:01:57.208243] (MonitorAgent_1): Tproc: 0.005928
[2021-07-01 15:01:57.194990] (MultiGeneratorAgent_1): Sending: [0.96858316]
[2021-07-01 15:01:57.195499] (MultiOutputMathAgent_1): Tproc: 0.007365
[2021-07-01 15:01:57.213668] (MonitorAgent_1): Received: {'from':
↪'MultiOutputMathAgent_1', 'data': {'cosine_minus': array([0.46858316])}, 'senderType':
↪': 'MultiOutputMathAgent', 'channel': 'default'}
[2021-07-01 15:01:57.219609] (MonitorAgent_1): Buffer: {'MultiOutputMathAgent_1': {
↪'sine_plus': array([0.5      , 1.08778525, 1.45105652, 1.45105652, 1.08778525]),
↪'cosine_minus': array([0.5      , 0.49802673, 0.4921147 , 0.48228725, 0.46858316])}}
↪}
[2021-07-01 15:01:57.199423] (MultiOutputMathAgent_1): Received: {'from':
↪'MultiGeneratorAgent_1', 'data': array([0.96858316]), 'senderType':
↪'MultiGeneratorAgent', 'channel': 'cosine'}
[2021-07-01 15:01:57.220649] (MonitorAgent_1): Tproc: 0.006413
[2021-07-01 15:01:57.202937] (MultiOutputMathAgent_1): Pack time: 0.002508
[2021-07-01 15:01:57.205253] (MultiOutputMathAgent_1): Sending: {'cosine_minus':
↪array([0.46858316])}
[2021-07-01 15:01:57.206416] (MultiOutputMathAgent_1): Tproc: 0.006076
[2021-07-01 15:01:58.181290] (MultiGeneratorAgent_1): Pack time: 0.000689
[2021-07-01 15:01:58.183351] (MultiGeneratorAgent_1): Sending: [1.2246468e-16]
[2021-07-01 15:01:58.184399] (MultiOutputMathAgent_1): Received: {'from':
↪'MultiGeneratorAgent_1', 'data': array([1.2246468e-16]), 'senderType':
↪'MultiGeneratorAgent', 'channel': 'sine'}
[2021-07-01 15:01:58.191755] (MonitorAgent_1): Received: {'from':
↪'MultiOutputMathAgent_1', 'data': {'sine_plus': array([0.5])}, 'senderType':
↪'MultiOutputMathAgent', 'channel': 'default'}
[2021-07-01 15:01:58.187102] (MultiGeneratorAgent_1): Pack time: 0.002899
[2021-07-01 15:01:58.197160] (MonitorAgent_1): Buffer: {'MultiOutputMathAgent_1': {
↪'sine_plus': array([0.5      , 1.08778525, 1.45105652, 1.45105652, 1.08778525,
↪0.5      ]), 'cosine_minus': array([0.5      , 0.49802673, 0.4921147 , 0.
↪48228725, 0.46858316])}}
[2021-07-01 15:01:58.188956] (MultiOutputMathAgent_1): Pack time: 0.000701
[2021-07-01 15:01:58.192717] (MultiGeneratorAgent_1): Sending: [0.95105652]
[2021-07-01 15:01:58.190516] (MultiOutputMathAgent_1): Sending: {'sine_plus':
↪array([0.5])}
[2021-07-01 15:01:58.197707] (MonitorAgent_1): Tproc: 0.004917
[2021-07-01 15:01:58.200727] (MonitorAgent_1): Received: {'from':
↪'MultiOutputMathAgent_1', 'data': {'cosine_minus': array([0.45105652])}, 'senderType':
↪': 'MultiOutputMathAgent', 'channel': 'default'}

```

(continues on next page)

(continued from previous page)

```

[2021-07-01 15:01:58.190927] (MultiOutputMathAgent_1): Tproc: 0.002815
[2021-07-01 15:01:58.207440] (MonitorAgent_1): Buffer: {'MultiOutputMathAgent_1': {
→ 'sine_plus': array([0.5          , 1.08778525, 1.45105652, 1.45105652, 1.08778525,
0.5          ]), 'cosine_minus': array([0.5          , 0.49802673, 0.4921147 , 0.
→ 48228725, 0.46858316,
0.45105652])}}
[2021-07-01 15:01:58.194263] (MultiOutputMathAgent_1): Received: {'from':
→ 'MultiGeneratorAgent_1', 'data': array([0.95105652]), 'senderType':
→ 'MultiGeneratorAgent', 'channel': 'cosine'}
[2021-07-01 15:01:58.208510] (MonitorAgent_1): Tproc: 0.007011
[2021-07-01 15:01:58.196419] (MultiOutputMathAgent_1): Pack time: 0.001563
[2021-07-01 15:01:58.198945] (MultiOutputMathAgent_1): Sending: {'cosine_minus':_
→ array([0.45105652])}
[2021-07-01 15:01:58.201557] (MultiOutputMathAgent_1): Tproc: 0.006677
[2021-07-01 15:01:59.180793] (MultiGeneratorAgent_1): Pack time: 0.000552
[2021-07-01 15:01:59.182349] (MultiGeneratorAgent_1): Sending: [-0.58778525]
[2021-07-01 15:01:59.183520] (MultiOutputMathAgent_1): Received: {'from':
→ 'MultiGeneratorAgent_1', 'data': array([-0.58778525]), 'senderType':
→ 'MultiGeneratorAgent', 'channel': 'sine'}
[2021-07-01 15:01:59.190572] (MonitorAgent_1): Received: {'from':
→ 'MultiOutputMathAgent_1', 'data': {'sine_plus': array([-0.08778525])}, 'senderType':
→ 'MultiOutputMathAgent', 'channel': 'default'}
[2021-07-01 15:01:59.183271] (MultiGeneratorAgent_1): Pack time: 0.000478
[2021-07-01 15:01:59.184681] (MultiOutputMathAgent_1): Pack time: 0.000554
[2021-07-01 15:01:59.197807] (MonitorAgent_1): Buffer: {'MultiOutputMathAgent_1': {
→ 'sine_plus': array([ 0.5          , 1.08778525, 1.45105652, 1.45105652, 1.08778525,
0.5          , -0.08778525]), 'cosine_minus': array([0.5          , 0.49802673, 0.
→ 4921147 , 0.48228725, 0.46858316,
0.45105652])}}
[2021-07-01 15:01:59.185007] (MultiGeneratorAgent_1): Sending: [0.92977649]
[2021-07-01 15:01:59.186423] (MultiOutputMathAgent_1): Sending: {'sine_plus': array([-
→ 0.08778525])}
[2021-07-01 15:01:59.198320] (MonitorAgent_1): Tproc: 0.007246
[2021-07-01 15:01:59.201333] (MonitorAgent_1): Received: {'from':
→ 'MultiOutputMathAgent_1', 'data': {'cosine_minus': array([0.42977649])}, 'senderType
→ ': 'MultiOutputMathAgent', 'channel': 'default'}
[2021-07-01 15:01:59.186874] (MultiOutputMathAgent_1): Tproc: 0.002855
[2021-07-01 15:01:59.207784] (MonitorAgent_1): Buffer: {'MultiOutputMathAgent_1': {
→ 'sine_plus': array([ 0.5          , 1.08778525, 1.45105652, 1.45105652, 1.08778525,
0.5          , -0.08778525]), 'cosine_minus': array([0.5          , 0.49802673, 0.
→ 4921147 , 0.48228725, 0.46858316,
0.45105652, 0.42977649])}}
[2021-07-01 15:01:59.189887] (MultiOutputMathAgent_1): Received: {'from':
→ 'MultiGeneratorAgent_1', 'data': array([0.92977649]), 'senderType':
→ 'MultiGeneratorAgent', 'channel': 'cosine'}
[2021-07-01 15:01:59.208882] (MonitorAgent_1): Tproc: 0.006219
[2021-07-01 15:01:59.192005] (MultiOutputMathAgent_1): Pack time: 0.001011
[2021-07-01 15:01:59.193943] (MultiOutputMathAgent_1): Sending: {'cosine_minus':_
→ array([0.42977649])}
[2021-07-01 15:01:59.194633] (MultiOutputMathAgent_1): Tproc: 0.003875
[2021-07-01 15:02:00.181478] (MultiGeneratorAgent_1): Pack time: 0.000776
[2021-07-01 15:02:00.184191] (MultiGeneratorAgent_1): Sending: [-0.95105652]
[2021-07-01 15:02:00.197991] (MultiGeneratorAgent_1): Pack time: 0.013129
[2021-07-01 15:02:00.187946] (MultiOutputMathAgent_1): Received: {'from':
→ 'MultiGeneratorAgent_1', 'data': array([-0.95105652]), 'senderType':
→ 'MultiGeneratorAgent', 'channel': 'sine'}
[2021-07-01 15:02:00.207903] (MonitorAgent_1): Received: {'from':
→ 'MultiOutputMathAgent_1', 'data': {'sine_plus': array([-0.45105652])}, (continues on next page)
→ 'MultiOutputMathAgent', 'channel': 'default'}

```

(continued from previous page)

```
[2021-07-01 15:02:00.205156] (MultiGeneratorAgent_1): Sending: [0.90482705]
[2021-07-01 15:02:00.190476] (MultiOutputMathAgent_1): Pack time: 0.000718
[2021-07-01 15:02:00.229208] (MonitorAgent_1): Buffer: {'MultiOutputMathAgent_1': {
↪ 'sine_plus': array([ 0.5          ,  1.08778525,  1.45105652,  1.45105652,  1.08778525,
↪ 0.5          , -0.08778525, -0.45105652]), 'cosine_minus': array([0.5          , 0.
↪ 49802673, 0.4921147 , 0.48228725, 0.46858316,
↪ 0.45105652, 0.42977649])}}
[2021-07-01 15:02:00.229840] (MonitorAgent_1): Tproc: 0.021469
[2021-07-01 15:02:00.196944] (MultiOutputMathAgent_1): Sending: {'sine_plus': array([-
↪ 0.45105652])}
[2021-07-01 15:02:00.232820] (MonitorAgent_1): Received: {'from':
↪ 'MultiOutputMathAgent_1', 'data': {'cosine_minus': array([0.40482705])}, 'senderType
↪ ': 'MultiOutputMathAgent', 'channel': 'default'}
[2021-07-01 15:02:00.201511] (MultiOutputMathAgent_1): Tproc: 0.011616
[2021-07-01 15:02:00.241196] (MonitorAgent_1): Buffer: {'MultiOutputMathAgent_1': {
↪ 'sine_plus': array([ 0.5          ,  1.08778525,  1.45105652,  1.45105652,  1.08778525,
↪ 0.5          , -0.08778525, -0.45105652]), 'cosine_minus': array([0.5          , 0.
↪ 49802673, 0.4921147 , 0.48228725, 0.46858316,
↪ 0.45105652, 0.42977649, 0.40482705])}}
[2021-07-01 15:02:00.221224] (MultiOutputMathAgent_1): Received: {'from':
↪ 'MultiGeneratorAgent_1', 'data': array([0.90482705]), 'senderType':
↪ 'MultiGeneratorAgent', 'channel': 'cosine'}
[2021-07-01 15:02:00.241435] (MonitorAgent_1): Tproc: 0.007897
[2021-07-01 15:02:00.223049] (MultiOutputMathAgent_1): Pack time: 0.000661
[2021-07-01 15:02:00.224864] (MultiOutputMathAgent_1): Sending: {'cosine_minus':
↪ array([0.40482705])}
[2021-07-01 15:02:00.225436] (MultiOutputMathAgent_1): Tproc: 0.003688
```

16.4 Tutorial 4 - A metrological datastream

In this tutorial we introduce the new metrologically enabled agents. We initialize an agent, which generates an infinite sine signal. The signal is generated from the built-in class `MetrologicalSineGenerator` which delivers on each call one timestamp and one value each with associated uncertainties.

The *MetrologicalSineGeneratorAgent* is based on the new class `agentMET4FOF.metrological_agents.MetrologicalAgent`. We only adapt the methods `init_parameters()` and `agent_loop()`. This we need to hand over an instance of the signal generating class and to generate the actual samples. The rest of the buffering and plotting logic is encapsulated inside of the new base classes.

```
[2]: # %load tutorial_4_metrological_streams.py
from agentMET4FOF.agents import AgentNetwork
from agentMET4FOF.metrological_agents import MetrologicalAgent,
↪ MetrologicalMonitorAgent
from agentMET4FOF.metrological_streams import (
    MetrologicalDataStreamMET4FOF,
    MetrologicalSineGenerator,
)

class MetrologicalSineGeneratorAgent(MetrologicalAgent):
    """An agent streaming a sine signal

    Takes samples from an instance of :py:class:`MetrologicalSineGenerator` and pushes
    them sample by sample to connected agents via its output channel.
```

(continues on next page)

(continued from previous page)

```

"""

# The datatype of the stream will be MetrologicalSineGenerator.
_stream: MetrologicalDataStreamMET4FOF

def init_parameters(
    self,
    signal: MetrologicalDataStreamMET4FOF = MetrologicalSineGenerator(),
    **kwargs
):
    """Initialize the input data stream

    Parameters
    -----
    signal : MetrologicalDataStreamMET4FOF
        the underlying signal for the generator
    """
    self._stream = signal
    super().init_parameters()
    self.set_output_data(channel="default", metadata=self._stream.metadata)

def agent_loop(self):
    """Model the agent's behaviour

    On state *Running* the agent will extract sample by sample the input
    datastream's content and push it into its output buffer.
    """
    if self.current_state == "Running":
        self.set_output_data(channel="default", data=[self._stream.next_sample()])
        super().agent_loop()

def demonstrate_metrological_stream():

    # start agent network server
    agent_network = AgentNetwork(dashboard_modules=True)

    # Initialize signal generating class outside of agent framework.
    signal = MetrologicalSineGenerator()

    # Initialize metrologically enabled agent taking name from signal source metadata.
    source_name = signal.metadata.metadata["device_id"]
    source_agent = agent_network.add_agent(
        name=source_name, agentType=MetrologicalSineGeneratorAgent
    )
    source_agent.init_parameters(signal)

    # Initialize metrologically enabled plotting agent.
    monitor_agent = agent_network.add_agent(
        "MonitorAgent",
        agentType=MetrologicalMonitorAgent,
        buffer_size=50,
    )

    # Bind agents.
    source_agent.bind_output(monitor_agent)

```

(continues on next page)

(continued from previous page)

```

# Set all agents states to "Running".
agent_network.set_running_state()

# Allow for shutting down the network after execution.
return agent_network

if __name__ == "__main__":
    demonstrate_metrological_stream()

Starting NameServer...
Broadcast server running on 0.0.0.0:9091
NS running on 127.0.0.1:3333 (127.0.0.1)
URI = PYRO:Pyro.NameServer@127.0.0.1:3333

-----
|
| Your agent network is starting up. Open your browser and |
| visit the agentMET4FOF dashboard on http://127.0.0.1:8050/ |
|
|
-----

INFO [2021-02-05 19:24:37.900901] (SineGenerator): INITIALIZED
INFO [2021-02-05 19:24:37.939928] (MonitorAgent): INITIALIZED
[2021-02-05 19:24:37.955210] (SineGenerator): Connected output module: MonitorAgent
SET STATE: Running
[2021-02-05 19:24:38.907664] (SineGenerator): Pack time: 0.000336
[2021-02-05 19:24:38.909019] (SineGenerator): Sending: [array([[0.          , 0.          , 0.68494649, 0.25          ]]), <time_series_metadata.scheme.MetaData object at 0x7f424e871730>]
[2021-02-05 19:24:38.910202] (MonitorAgent): Received: {'from': 'SineGenerator', 'data': array([[0.          , 0.          , 0.68494649, 0.25          ]]), 'metadata': <time_series_metadata.scheme.MetaData object at 0x7f424e822bb0>, 'senderType': 'MetrologicalSineGeneratorAgent', 'channel': 'default'}
[2021-02-05 19:24:38.911237] (MonitorAgent): Buffer: {'SineGenerator': {'data': array([[0.          , 0.          , 0.68494649, 0.25          ]]), 'metadata': [<time_series_metadata.scheme.MetaData object at 0x7f424e822bb0>]}}
[2021-02-05 19:24:38.911459] (MonitorAgent): Tproc: 0.000968
[2021-02-05 19:24:39.907438] (SineGenerator): Pack time: 0.000403
[2021-02-05 19:24:39.909067] (MonitorAgent): Received: {'from': 'SineGenerator', 'data': array([[0.002          , 0.          , 0.42028269, 0.25          ]]), 'metadata': <time_series_metadata.scheme.MetaData object at 0x7f424e822c70>, 'senderType': 'MetrologicalSineGeneratorAgent', 'channel': 'default'}
[2021-02-05 19:24:39.908668] (SineGenerator): Sending: [array([[0.002          , 0.          , 0.42028269, 0.25          ]]), <time_series_metadata.scheme.MetaData object at 0x7f424e871730>]
[2021-02-05 19:24:39.910652] (MonitorAgent): Buffer: {'SineGenerator': {'data': array([[0.          , 0.          , 0.68494649, 0.25          ], [0.002          , 0.          , 0.42028269, 0.25          ]]), 'metadata': [<time_series_metadata.scheme.MetaData object at 0x7f424e822bb0>, <time_series_metadata.scheme.MetaData object at 0x7f424e822c70>]}}
[2021-02-05 19:24:39.911060] (MonitorAgent): Tproc: 0.001731
[2021-02-05 19:24:40.908816] (SineGenerator): Pack time: 0.000738
[2021-02-05 19:24:40.912960] (SineGenerator): Sending: [array([[0.004          , 0.          , 1.54415656, 0.25          ]]), <time_series_metadata.scheme.MetaData object at 0x7f424e871730>]
[2021-02-05 19:24:40.913508] (MonitorAgent): Received: {'from': 'SineGenerator', 'data': array([[0.004          , 0.          , 1.54415656, 0.25          ]]), 'metadata': <time_series_metadata.scheme.MetaData object at 0x7f424e822ca0>, 'senderType': 'MetrologicalSineGeneratorAgent', 'channel': 'default'}

```

(continues on next page)

(continued from previous page)

```
[2021-02-05 19:24:40.917793] (MonitorAgent): Buffer: {'SineGenerator': {'data': ↵
↵array([[0.          , 0.          , 0.68494649, 0.25          ],
↵       [0.002       , 0.          , 0.42028269, 0.25          ],
↵       [0.004       , 0.          , 1.54415656, 0.25          ]]), 'metadata': [<time_series_
↵metadata.scheme.MetaData object at 0x7f424e822bb0>, <time_series_metadata.scheme.
↵MetaData object at 0x7f424e822c70>, <time_series_metadata.scheme.MetaData object at ↵
↵0x7f424e822ca0>]}}
[2021-02-05 19:24:40.919608] (MonitorAgent): Tproc: 0.005357
[2021-02-05 19:24:41.907632] (SineGenerator): Pack time: 0.000437
[2021-02-05 19:24:41.909056] (SineGenerator): Sending: [array([[0.006       , 0.          , ↵
↵0.9256774, 0.25          ]]), <time_series_metadata.scheme.MetaData object at ↵
↵0x7f424e871730>]
[2021-02-05 19:24:41.909673] (MonitorAgent): Received: {'from': 'SineGenerator', 'data'
↵': array([[0.006       , 0.          , 0.9256774, 0.25          ]]), 'metadata': <time_series_
↵metadata.scheme.MetaData object at 0x7f424e822d00>, 'senderType':
↵'MetrologicalSineGeneratorAgent', 'channel': 'default'}
[2021-02-05 19:24:41.913785] (MonitorAgent): Buffer: {'SineGenerator': {'data': ↵
↵array([[0.          , 0.          , 0.68494649, 0.25          ],
↵       [0.002       , 0.          , 0.42028269, 0.25          ],
↵       [0.004       , 0.          , 1.54415656, 0.25          ],
↵       [0.006       , 0.          , 0.9256774 , 0.25          ]]), 'metadata': [<time_series_
↵metadata.scheme.MetaData object at 0x7f424e822bb0>, <time_series_metadata.scheme.
↵MetaData object at 0x7f424e822c70>, <time_series_metadata.scheme.MetaData object at ↵
↵0x7f424e822ca0>, <time_series_metadata.scheme.MetaData object at 0x7f424e822d00>]}}
[2021-02-05 19:24:41.914125] (MonitorAgent): Tproc: 0.004137
[2021-02-05 19:24:42.909007] (SineGenerator): Pack time: 0.000784
[2021-02-05 19:24:42.911438] (SineGenerator): Sending: [array([[0.008       , 0.          , ↵
↵1.12170929, 0.25          ]]), <time_series_metadata.scheme.MetaData object at ↵
↵0x7f424e871730>]
[2021-02-05 19:24:42.913822] (MonitorAgent): Received: {'from': 'SineGenerator', 'data'
↵': array([[0.008       , 0.          , 1.12170929, 0.25          ]]), 'metadata': <time_
↵series_metadata.scheme.MetaData object at 0x7f424e822490>, 'senderType':
↵'MetrologicalSineGeneratorAgent', 'channel': 'default'}
[2021-02-05 19:24:42.920323] (MonitorAgent): Buffer: {'SineGenerator': {'data': ↵
↵array([[0.          , 0.          , 0.68494649, 0.25          ],
↵       [0.002       , 0.          , 0.42028269, 0.25          ],
↵       [0.004       , 0.          , 1.54415656, 0.25          ],
↵       [0.006       , 0.          , 0.9256774 , 0.25          ],
↵       [0.008       , 0.          , 1.12170929, 0.25          ]]), 'metadata': [<time_series_
↵metadata.scheme.MetaData object at 0x7f424e822bb0>, <time_series_metadata.scheme.
↵MetaData object at 0x7f424e822c70>, <time_series_metadata.scheme.MetaData object at ↵
↵0x7f424e822ca0>, <time_series_metadata.scheme.MetaData object at 0x7f424e822d00>,
↵<time_series_metadata.scheme.MetaData object at 0x7f424e822490>]}}
[2021-02-05 19:24:42.921078] (MonitorAgent): Tproc: 0.006613
```

16.5 Tutorial 5 - Building coalitions

We demonstrate the use of Coalition of agents to group agents together. Rationale of grouping depends on the users and application. For example, we can group sensors which are measuring the same measurand. To this end, the coalition consists of a list of agent names and provides aesthetic differences in the dashboard.

All coalitions visible by the `agent_network` can be accessed via `agent_network.coalitions`.

```
[1]: # %load tutorial_5_coalition.py
from agentMET4FOF.agents import AgentNetwork, MonitorAgent, SineGeneratorAgent

def demonstrate_generator_agent_use():
    # Start agent network server.
    agent_network = AgentNetwork()

    # Initialize agents by adding them to the agent network.
    gen_agent_1 = agent_network.add_agent(agentType=SineGeneratorAgent)
    gen_agent_2 = agent_network.add_agent(agentType=SineGeneratorAgent)
    monitor_agent = agent_network.add_agent(agentType=MonitorAgent)

    # bind generator agents outputs to monitor
    agent_network.bind_agents(gen_agent_1, monitor_agent)
    agent_network.bind_agents(gen_agent_2, monitor_agent)

    # setup health coalition group
    agent_network.add_coalition(
        "REDUNDANT_SENSORS", [gen_agent_1, gen_agent_2, monitor_agent]
    )

    # Set all agents' states to "Running".
    agent_network.set_running_state()

    # Allow for shutting down the network after execution
    return agent_network

if __name__ == "__main__":
    demonstrate_generator_agent_use()
```

```
Starting NameServer...
Broadcast server running on 0.0.0.0:9091
NS running on 127.0.0.1:3333 (127.0.0.1)
URI = PYRO:Pyro.NameServer@127.0.0.1:3333
```

```
-----
|
| Your agent network is starting up. Open your browser and |
| visit the agentMET4FOF dashboard on http://127.0.0.1:8050/ |
|
|-----
```

```
INFO [2021-02-05 19:34:50.491737] (SineGeneratorAgent_1): INITIALIZED
INFO [2021-02-05 19:34:50.524928] (SineGeneratorAgent_2): INITIALIZED
INFO [2021-02-05 19:34:50.557538] (MonitorAgent_1): INITIALIZED
[2021-02-05 19:34:50.574726] (SineGeneratorAgent_1): Connected output module:↵
↵MonitorAgent_1
[2021-02-05 19:34:50.583164] (SineGeneratorAgent_2): Connected output module:↵
↵MonitorAgent_1
SET STATE: Running
[2021-02-05 19:34:51.499491] (SineGeneratorAgent_1): Pack time: 0.001512
[2021-02-05 19:34:51.502797] (SineGeneratorAgent_1): Sending: [0.]
[2021-02-05 19:34:51.507439] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↵1', 'data': array([0.]), 'senderType': 'SineGeneratorAgent', 'channel': 'default'}
[2021-02-05 19:34:51.543076] (SineGeneratorAgent_2): Pack time: 0.002763
```

(continues on next page)

(continued from previous page)

```

[2021-02-05 19:34:51.509952] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↵
↵array([0.])}
[2021-02-05 19:34:51.546875] (SineGeneratorAgent_2): Sending: [0.]
[2021-02-05 19:34:51.511171] (MonitorAgent_1): Tproc: 0.002834
[2021-02-05 19:34:51.544997] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↵2', 'data': array([0.]), 'senderType': 'SineGeneratorAgent', 'channel': 'default'}
[2021-02-05 19:34:51.554497] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↵
↵array([0.]), 'SineGeneratorAgent_2': array([0.])}
[2021-02-05 19:34:51.555370] (MonitorAgent_1): Tproc: 0.009853
[2021-02-05 19:34:52.495894] (SineGeneratorAgent_1): Pack time: 0.00018
[2021-02-05 19:34:52.496930] (SineGeneratorAgent_1): Sending: [0.06279052]
[2021-02-05 19:34:52.497336] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↵1', 'data': array([0.06279052]), 'senderType': 'SineGeneratorAgent', 'channel':
↵'default'}
[2021-02-05 19:34:52.498583] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↵
↵array([0.        , 0.06279052]), 'SineGeneratorAgent_2': array([0.])}
[2021-02-05 19:34:52.498796] (MonitorAgent_1): Tproc: 0.001265
[2021-02-05 19:34:52.528407] (SineGeneratorAgent_2): Pack time: 0.000181
[2021-02-05 19:34:52.529454] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↵2', 'data': array([0.06279052]), 'senderType': 'SineGeneratorAgent', 'channel':
↵'default'}
[2021-02-05 19:34:52.529242] (SineGeneratorAgent_2): Sending: [0.06279052]
[2021-02-05 19:34:52.530661] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↵
↵array([0.        , 0.06279052]), 'SineGeneratorAgent_2': array([0.        , 0.
↵0.06279052])}
[2021-02-05 19:34:52.530827] (MonitorAgent_1): Tproc: 0.001183
[2021-02-05 19:34:53.496614] (SineGeneratorAgent_1): Pack time: 0.000331
[2021-02-05 19:34:53.497841] (SineGeneratorAgent_1): Sending: [0.12533323]
[2021-02-05 19:34:53.499000] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↵1', 'data': array([0.12533323]), 'senderType': 'SineGeneratorAgent', 'channel':
↵'default'}
[2021-02-05 19:34:53.535469] (SineGeneratorAgent_2): Pack time: 0.000494
[2021-02-05 19:34:53.503180] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↵
↵array([0.        , 0.06279052, 0.12533323]), 'SineGeneratorAgent_2': array([0.
↵0.        , 0.06279052])}
[2021-02-05 19:34:53.537256] (SineGeneratorAgent_2): Sending: [0.12533323]
[2021-02-05 19:34:53.503676] (MonitorAgent_1): Tproc: 0.004153
[2021-02-05 19:34:53.541731] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↵2', 'data': array([0.12533323]), 'senderType': 'SineGeneratorAgent', 'channel':
↵'default'}
[2021-02-05 19:34:53.545969] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↵
↵array([0.        , 0.06279052, 0.12533323]), 'SineGeneratorAgent_2': array([0.
↵0.        , 0.06279052, 0.12533323])}
[2021-02-05 19:34:53.554543] (MonitorAgent_1): Tproc: 0.011906
NS shut down.
[2021-02-05 19:34:54.497690] (SineGeneratorAgent_1): Pack time: 0.000662
[2021-02-05 19:34:54.504170] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↵1', 'data': array([0.18738131]), 'senderType': 'SineGeneratorAgent', 'channel':
↵'default'}
[2021-02-05 19:34:54.502583] (SineGeneratorAgent_1): Sending: [0.18738131]
[2021-02-05 19:34:54.515421] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':↵
↵array([0.        , 0.06279052, 0.12533323, 0.18738131]), 'SineGeneratorAgent_2':↵
↵array([0.        , 0.06279052, 0.12533323])}
[2021-02-05 19:34:54.528529] (SineGeneratorAgent_2): Pack time: 0.000237
[2021-02-05 19:34:54.529196] (SineGeneratorAgent_2): Sending: [0.18738131]
[2021-02-05 19:34:54.519541] (MonitorAgent_1): Tproc: 0.014505
[2021-02-05 19:34:54.531254] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↵2', 'data': array([0.18738131]), 'senderType': 'SineGeneratorAgent', 'channel':
↵'default'}

```

(continues on next page)

(continued from previous page)

```

[2021-02-05 19:34:54.532868] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':
↪array([0.          , 0.06279052, 0.12533323, 0.18738131]), 'SineGeneratorAgent_2':
↪array([0.          , 0.06279052, 0.12533323, 0.18738131])}
[2021-02-05 19:34:54.533451] (MonitorAgent_1): Tproc: 0.001834
[2021-02-05 19:34:55.497332] (SineGeneratorAgent_1): Pack time: 0.00057
[2021-02-05 19:34:55.499010] (SineGeneratorAgent_1): Sending: [0.24868989]
[2021-02-05 19:34:55.500133] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↪1', 'data': array([0.24868989]), 'senderType': 'SineGeneratorAgent', 'channel':
↪'default'}
[2021-02-05 19:34:55.533920] (SineGeneratorAgent_2): Pack time: 0.001052
[2021-02-05 19:34:55.538313] (SineGeneratorAgent_2): Sending: [0.24868989]
[2021-02-05 19:34:55.503852] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':
↪array([0.          , 0.06279052, 0.12533323, 0.18738131, 0.24868989]),
↪'SineGeneratorAgent_2': array([0.          , 0.06279052, 0.12533323, 0.18738131])}
[2021-02-05 19:34:55.504382] (MonitorAgent_1): Tproc: 0.003753
[2021-02-05 19:34:55.538319] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↪2', 'data': array([0.24868989]), 'senderType': 'SineGeneratorAgent', 'channel':
↪'default'}
[2021-02-05 19:34:55.544134] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':
↪array([0.          , 0.06279052, 0.12533323, 0.18738131, 0.24868989]),
↪'SineGeneratorAgent_2': array([0.          , 0.06279052, 0.12533323, 0.18738131, 0.
↪24868989])}
[2021-02-05 19:34:55.545007] (MonitorAgent_1): Tproc: 0.005636
[2021-02-05 19:34:56.496439] (SineGeneratorAgent_1): Pack time: 0.000345
[2021-02-05 19:34:56.499405] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↪1', 'data': array([0.30901699]), 'senderType': 'SineGeneratorAgent', 'channel':
↪'default'}
[2021-02-05 19:34:56.497380] (SineGeneratorAgent_1): Sending: [0.30901699]
[2021-02-05 19:34:56.503408] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':
↪array([0.          , 0.06279052, 0.12533323, 0.18738131, 0.24868989,
↪0.30901699]), 'SineGeneratorAgent_2': array([0.          , 0.06279052, 0.
↪12533323, 0.18738131, 0.24868989])}
[2021-02-05 19:34:56.530998] (SineGeneratorAgent_2): Pack time: 0.000148
[2021-02-05 19:34:56.503616] (MonitorAgent_1): Tproc: 0.003954
[2021-02-05 19:34:56.531354] (SineGeneratorAgent_2): Sending: [0.30901699]
[2021-02-05 19:34:56.532137] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↪2', 'data': array([0.30901699]), 'senderType': 'SineGeneratorAgent', 'channel':
↪'default'}
[2021-02-05 19:34:56.532882] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':
↪array([0.          , 0.06279052, 0.12533323, 0.18738131, 0.24868989,
↪0.30901699]), 'SineGeneratorAgent_2': array([0.          , 0.06279052, 0.
↪12533323, 0.18738131, 0.24868989,
↪0.30901699])}
[2021-02-05 19:34:56.533007] (MonitorAgent_1): Tproc: 0.000751
[2021-02-05 19:34:57.497217] (SineGeneratorAgent_1): Pack time: 0.000607
[2021-02-05 19:34:57.498990] (SineGeneratorAgent_1): Sending: [0.36812455]
[2021-02-05 19:34:57.499886] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
↪1', 'data': array([0.36812455]), 'senderType': 'SineGeneratorAgent', 'channel':
↪'default'}
[2021-02-05 19:34:57.529841] (SineGeneratorAgent_2): Pack time: 0.000718
[2021-02-05 19:34:57.505595] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':
↪array([0.          , 0.06279052, 0.12533323, 0.18738131, 0.24868989,
↪0.30901699, 0.36812455]), 'SineGeneratorAgent_2': array([0.          , 0.
↪06279052, 0.12533323, 0.18738131, 0.24868989,
↪0.30901699])}
[2021-02-05 19:34:57.531642] (SineGeneratorAgent_2): Sending: [0.36812455]
[2021-02-05 19:34:57.506484] (MonitorAgent_1): Tproc: 0.006025

```

(continues on next page)

(continued from previous page)

```
[2021-02-05 19:34:57.548550] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
→2', 'data': array([0.36812455]), 'senderType': 'SineGeneratorAgent', 'channel':
→'default'}
[2021-02-05 19:34:57.568741] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':_
→array([0.          , 0.06279052, 0.12533323, 0.18738131, 0.24868989,
→0.30901699, 0.36812455]), 'SineGeneratorAgent_2': array([0.          , 0.
→06279052, 0.12533323, 0.18738131, 0.24868989,
→0.30901699, 0.36812455])}
[2021-02-05 19:34:57.570422] (MonitorAgent_1): Tproc: 0.021339
[2021-02-05 19:34:58.495766] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
→1', 'data': array([0.42577929]), 'senderType': 'SineGeneratorAgent', 'channel':
→'default'}
[2021-02-05 19:34:58.496176] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':_
→array([0.          , 0.06279052, 0.12533323, 0.18738131, 0.24868989,
→0.30901699, 0.36812455, 0.42577929]), 'SineGeneratorAgent_2': array([0.
→, 0.06279052, 0.12533323, 0.18738131, 0.24868989,
→0.30901699, 0.36812455])}
[2021-02-05 19:34:58.495362] (SineGeneratorAgent_1): Pack time: 7.8e-05
[2021-02-05 19:34:58.496226] (MonitorAgent_1): Tproc: 0.000388
[2021-02-05 19:34:58.495629] (SineGeneratorAgent_1): Sending: [0.42577929]
[2021-02-05 19:34:58.527965] (SineGeneratorAgent_2): Pack time: 9.5e-05
[2021-02-05 19:34:58.528730] (MonitorAgent_1): Received: {'from': 'SineGeneratorAgent_
→2', 'data': array([0.42577929]), 'senderType': 'SineGeneratorAgent', 'channel':
→'default'}
[2021-02-05 19:34:58.528211] (SineGeneratorAgent_2): Sending: [0.42577929]
[2021-02-05 19:34:58.529372] (MonitorAgent_1): Buffer: {'SineGeneratorAgent_1':_
→array([0.          , 0.06279052, 0.12533323, 0.18738131, 0.24868989,
→0.30901699, 0.36812455, 0.42577929]), 'SineGeneratorAgent_2': array([0.
→, 0.06279052, 0.12533323, 0.18738131, 0.24868989,
→0.30901699, 0.36812455, 0.42577929])}
[2021-02-05 19:34:58.529423] (MonitorAgent_1): Tproc: 0.000622
```

16.6 Tutorial 6 - Using a different backend

By default, “osbrain” backend offers real connectivity between agents (each agent has its own port & IP address) in distributed systems (e.g connecting agents from raspberry pis to PCs, etc), which explains why it is harder to debug.

In the “mesa” backend, there’s only one real timer which is started in the AgentNetwork, and every timer tick will advance the agent actions by calling `step()` which includes `agent_loop` and `on_received_message`. Moreover, in the “mesa” backend, agents do not have their own port and IP addresses, they are simulated objects to emulate the behaviour of distributed agents. Hence, “osbrain” is closer to deployment phase, whereas mesa is suited for the simulation/designing phase. To switch between the backends, simply pass the backend parameter to either “mesa” or “osbrain” in the AgentNetwork instantiation.

```
[2]: # %load tutorial_6_mesa_backend.py
from agentMET4FOF.agents import AgentNetwork, MonitorAgent, SineGeneratorAgent

def demonstrate_mesa_backend():

    # Start agent network and specify backend via the corresponding keyword parameter.
    _agent_network = AgentNetwork(backend="mesa")

    # Initialize agents by adding them to the agent network.
```

(continues on next page)

(continued from previous page)

```

sine_agent = _agent_network.add_agent(agentType=SineGeneratorAgent)
monitor_agent = _agent_network.add_agent(agentType=MonitorAgent, buffer_size=200)
sine_agent.bind_output(monitor_agent)

# Set all agents states to "Running".
_agent_network.set_running_state()

return _agent_network

if __name__ == "__main__":
    demonstrate_mesa_backend()

```

```

-----
|
| Your agent network is starting up. Open your browser and |
| visit the agentMET4FOF dashboard on http://127.0.0.1:8050/ |
|
|-----
[2021-02-05 19:39:41.143529] (SineGeneratorAgent_1): INITIALIZED

[2021-02-05 19:39:41.143892] (MonitorAgent_1): INITIALIZED
[2021-02-05 19:39:41.143941] (SineGeneratorAgent_1): Connected output module:
↳MonitorAgent_1
SET STATE:    Running

```

16.7 Tutorial 7 - Generating signals using a generic metrological agent

In the present tutorial we demonstrate the creation of arbitrary metrologically enabled agents that generate signals according to a given function. agent network with three metrologically enabled agents, two of which are defined as objects of the `MetrologicalGeneratorAgent` class and the third is a single monitor agent that simultaneously plots the output of the first two agents. The first agent takes an input from an object of the `MetrologicalSineGenerator` class (ref. Tutorial 4) and the second from a `MetrologicalMultiwaveGenerator` object, which generates a signal given by a sum of cosines.

The `MetrologicalGeneratorAgent` is based on the `agentMET4FOF.metrological_agents.MetrologicalAgent` class.

```

[3]: # %load tutorial_7_generic_metrological_agent.py
from agentMET4FOF.agents import AgentNetwork
from agentMET4FOF.metrological_agents import (
    MetrologicalMonitorAgent,
    MetrologicalGeneratorAgent,
)
from agentMET4FOF.metrological_streams import (
    MetrologicalSineGenerator,
    MetrologicalMultiWaveGenerator,
)

def demonstrate_metrological_stream():
    """Demonstrate an agent network with two metrologically enabled agents

```

(continues on next page)

(continued from previous page)

The agents are defined as objects of the `:class:`MetrologicalGeneratorAgent`` class whose outputs are bound to a single monitor agent.

The metrological agents generate signals from a sine wave and a multiwave generator source.

Returns

`:class:`AgentNetwork``

The initialized and running agent network object

"""

start agent network server

agent_network = AgentNetwork(dashboard_modules=**True**)

Initialize metrologically enabled agent with a multiwave (sum of cosines)

generator as signal source taking name from signal source metadata.

signal_multiwave = MetrologicalMultiWaveGenerator(
 quantity_names="Voltage", quantity_units="V"

)

source_name_multiwave = signal_multiwave.metadata.metadata["device_id"]

source_agent_multiwave = agent_network.add_agent(
 name=source_name_multiwave, agentType=MetrologicalGeneratorAgent

)

source_agent_multiwave.init_parameters(signal=signal_multiwave)

Initialize second metrologically enabled agent with a sine generator as signal

source taking name from signal source metadata.

signal_sine = MetrologicalSineGenerator()

source_name_sine = signal_sine.metadata.metadata["device_id"]

source_agent_sine = agent_network.add_agent(
 name=source_name_sine, agentType=MetrologicalGeneratorAgent

)

source_agent_sine.init_parameters(signal=signal_sine)

Initialize metrologically enabled plotting agent.

monitor_agent = agent_network.add_agent(
 "MonitorAgent",

agentType=MetrologicalMonitorAgent,
 buffer_size=50,

)

Bind agents.

source_agent_multiwave.bind_output(monitor_agent)

source_agent_sine.bind_output(monitor_agent)

Set all agents states to "Running".

agent_network.set_running_state()

Allow for shutting down the network after execution.

return agent_network

if __name__ == "__main__":

demonstrate_metrological_stream()

```

Starting NameServer...
Broadcast server running on 0.0.0.0:9091
NS running on 127.0.0.1:3333 (127.0.0.1)
URI = PYRO:Pyro.NameServer@127.0.0.1:3333

-----
|
| Your agent network is starting up. Open your browser and
| visit the agentMET4FOF dashboard on http://127.0.0.1:8050/
|
|
-----

INFO [2021-06-04 08:55:23.204159] (MultiWaveDataGenerator): INITIALIZED
INFO [2021-06-04 08:55:23.239519] (SineGenerator): INITIALIZED
INFO [2021-06-04 08:55:23.264925] (MonitorAgent): INITIALIZED
[2021-06-04 08:55:23.281027] (MultiWaveDataGenerator): Connected output module:
↳MonitorAgent
[2021-06-04 08:55:23.287882] (SineGenerator): Connected output module: MonitorAgent
SET STATE: Running

/home/ludwig10/code/agentMET4FOF/agentMET4FOF/metrological_streams.py:135:
↳UserWarning:

No uncertainty generator function specified. Setting to default (constant).

[2021-06-04 08:55:24.215457] (MultiWaveDataGenerator): Pack time: 0.000883
[2021-06-04 08:55:24.221676] (MultiWaveDataGenerator): Sending: [array([[0.
↳0.
↳, 1.14201382, 0.1
↳]]), <time_series_metadata.scheme.Metadata object at
↳0x7fcb3440d3a0>]
[2021-06-04 08:55:24.224453] (MonitorAgent): Received: {'from':
↳'MultiWaveDataGenerator', 'data': array([[0.
↳, 0.
↳, 1.14201382, 0.1
↳]]), 'metadata': <time_series_metadata.scheme.Metadata object at 0x7fcb34407790>
↳, 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-06-04 08:55:24.229078] (MonitorAgent): Buffer: {'MultiWaveDataGenerator': {'data
↳': array([[0.
↳, 0.
↳, 1.14201382, 0.1
↳]]), 'metadata': [<time_
↳series_metadata.scheme.Metadata object at 0x7fcb34407790>]}}
[2021-06-04 08:55:24.230706] (MonitorAgent): Tproc: 0.00426
[2021-06-04 08:55:24.244909] (SineGenerator): Pack time: 0.000908
[2021-06-04 08:55:24.246596] (SineGenerator): Sending: [array([[0.
↳, 0.
↳, 0.28402764, 0.1
↳]]), <time_series_metadata.scheme.Metadata object at
↳0x7fcb34352730>]
[2021-06-04 08:55:24.246392] (MonitorAgent): Received: {'from': 'SineGenerator', 'data
↳': array([[0.
↳, 0.
↳, 0.28402764, 0.1
↳]]), 'metadata': <time_
↳series_metadata.scheme.Metadata object at 0x7fcb34412e20>, 'senderType':
↳'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-06-04 08:55:24.247713] (MonitorAgent): Buffer: {'MultiWaveDataGenerator': {'data
↳': array([[0.
↳, 0.
↳, 1.14201382, 0.1
↳]]), 'metadata': [<time_
↳series_metadata.scheme.Metadata object at 0x7fcb34407790>]}, 'SineGenerator': {'data
↳': array([[0.
↳, 0.
↳, 0.28402764, 0.1
↳]]), 'metadata': [<time_
↳series_metadata.scheme.Metadata object at 0x7fcb34412e20>]}}
[2021-06-04 08:55:24.247870] (MonitorAgent): Tproc: 0.001326
[2021-06-04 08:55:25.208567] (MultiWaveDataGenerator): Pack time: 0.000196
[2021-06-04 08:55:25.209381] (MultiWaveDataGenerator): Sending: [array([[0.002
↳, 0.
↳, 0.85706774, 0.1
↳]]), <time_series_metadata.scheme.Metadata object
↳at 0x7fcb3440d3a0>]
[2021-06-04 08:55:25.209775] (MonitorAgent): Received: {'from':
↳'MultiWaveDataGenerator', 'data': array([[0.002
↳, 0.
↳, 0.85706774, 0.1
↳]]), 'metadata': <time_series_metadata.scheme.Metadata object at 0x7fcb34412520>
↳, 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default'}
(continues on next page)

```

(continued from previous page)

```

[2021-06-04 08:55:25.211461] (MonitorAgent): Buffer: {'MultiWaveDataGenerator': {'data
→': array([[0.          , 0.          , 1.14201382, 0.1          ],
→          [0.002        , 0.          , 0.85706774, 0.1          ]]), 'metadata': [<time_series_
→metadata.scheme.MetaData object at 0x7fcb34407790>, <time_series_metadata.scheme.
→MetaData object at 0x7fcb34412520>]}, 'SineGenerator': {'data': array([[0.          ,
→0.          , 0.28402764, 0.1          ]]), 'metadata': [<time_series_metadata.scheme.
→MetaData object at 0x7fcb34412e20>]}}
[2021-06-04 08:55:25.211678] (MonitorAgent): Tproc: 0.001699
[2021-06-04 08:55:25.242644] (SineGenerator): Pack time: 0.000117
[2021-06-04 08:55:25.243075] (SineGenerator): Sending: [array([[0.002        , 0.
→          , 0.68388675, 0.1          ]]), <time_series_metadata.scheme.MetaData object at
→0x7fcb34352730>]
[2021-06-04 08:55:25.243264] (MonitorAgent): Received: {'from': 'SineGenerator', 'data
→': array([[0.002        , 0.          , 0.68388675, 0.1          ]]), 'metadata': <time_
→series_metadata.scheme.MetaData object at 0x7fcb34412f40>, 'senderType':
→'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-06-04 08:55:25.244287] (MonitorAgent): Buffer: {'MultiWaveDataGenerator': {'data
→': array([[0.          , 0.          , 1.14201382, 0.1          ],
→          [0.002        , 0.          , 0.85706774, 0.1          ]]), 'metadata': [<time_series_
→metadata.scheme.MetaData object at 0x7fcb34407790>, <time_series_metadata.scheme.
→MetaData object at 0x7fcb34412520>]}, 'SineGenerator': {'data': array([[0.          ,
→0.          , 0.28402764, 0.1          ],
→          [0.002        , 0.          , 0.68388675, 0.1          ]]), 'metadata': [<time_series_
→metadata.scheme.MetaData object at 0x7fcb34412e20>, <time_series_metadata.scheme.
→MetaData object at 0x7fcb34412f40>]}}
[2021-06-04 08:55:25.244407] (MonitorAgent): Tproc: 0.001012
NS shut down.
[2021-06-04 08:55:26.211862] (MultiWaveDataGenerator): Pack time: 0.000771
[2021-06-04 08:55:26.214571] (MultiWaveDataGenerator): Sending: [array([[0.004
→          , 0.          , 0.36951548, 0.1          ]]), <time_series_metadata.scheme.MetaData object
→at 0x7fcb3440d3a0>]
[2021-06-04 08:55:26.215381] (MonitorAgent): Received: {'from':
→'MultiWaveDataGenerator', 'data': array([[0.004        , 0.          , 0.36951548, 0.1
→          ]]), 'metadata': <time_series_metadata.scheme.MetaData object at 0x7fcb34402160>
→, 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-06-04 08:55:26.246395] (SineGenerator): Pack time: 0.001739
[2021-06-04 08:55:26.226046] (MonitorAgent): Buffer: {'MultiWaveDataGenerator': {'data
→': array([[0.          , 0.          , 1.14201382, 0.1          ],
→          [0.002        , 0.          , 0.85706774, 0.1          ],
→          [0.004        , 0.          , 0.36951548, 0.1          ]]), 'metadata': [<time_series_
→metadata.scheme.MetaData object at 0x7fcb34407790>, <time_series_metadata.scheme.
→MetaData object at 0x7fcb34412520>, <time_series_metadata.scheme.MetaData object at
→0x7fcb34402160>]}, 'SineGenerator': {'data': array([[0.          , 0.          , 0.
→28402764, 0.1          ],
→          [0.002        , 0.          , 0.68388675, 0.1          ]]), 'metadata': [<time_series_
→metadata.scheme.MetaData object at 0x7fcb34412e20>, <time_series_metadata.scheme.
→MetaData object at 0x7fcb34412f40>]}}
[2021-06-04 08:55:26.255335] (SineGenerator): Sending: [array([[0.004        , 0.
→          , 1.07205349, 0.1          ]]), <time_series_metadata.scheme.MetaData object at
→0x7fcb34352730>]
[2021-06-04 08:55:26.226903] (MonitorAgent): Tproc: 0.007832
[2021-06-04 08:55:26.258551] (MonitorAgent): Received: {'from': 'SineGenerator', 'data
→': array([[0.004        , 0.          , 1.07205349, 0.1          ]]), 'metadata': <time_
→series_metadata.scheme.MetaData object at 0x7fcb34402af0>, 'senderType':
→'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-06-04 08:55:26.267521] (MonitorAgent): Buffer: {'MultiWaveDataGenerator': {'data
→': array([[0.          , 0.          , 1.14201382, 0.1          ],

```

(continues on next page)

(continued from previous page)

```

[0.002      , 0.          , 0.85706774, 0.1          ],
[0.004      , 0.          , 0.36951548, 0.1          ]]), 'metadata': [<time_series_
↪metadata.scheme.MetaData object at 0x7fcb34407790>, <time_series_metadata.scheme.
↪MetaData object at 0x7fcb34412520>, <time_series_metadata.scheme.MetaData object at
↪0x7fcb34402160>]], 'SineGenerator': {'data': array([[0.          , 0.          , 0.
↪28402764, 0.1          ]],
[0.002      , 0.          , 0.68388675, 0.1          ],
[0.004      , 0.          , 1.07205349, 0.1          ]]), 'metadata': [<time_series_
↪metadata.scheme.MetaData object at 0x7fcb34412e20>, <time_series_metadata.scheme.
↪MetaData object at 0x7fcb34412f40>, <time_series_metadata.scheme.MetaData object at
↪0x7fcb34402af0>]]}
[2021-06-04 08:55:26.268465] (MonitorAgent): Tproc: 0.00931
[2021-06-04 08:55:27.211643] (MultiWaveDataGenerator): Pack time: 0.000733
[2021-06-04 08:55:27.214634] (MultiWaveDataGenerator): Sending: [array([[ 0.006      ,
↪ 0.          , -0.23075114, 0.1          ]]), <time_series_metadata.scheme.MetaData
↪object at 0x7fcb3440d3a0>]
[2021-06-04 08:55:27.215842] (MonitorAgent): Received: {'from':
↪'MultiWaveDataGenerator', 'data': array([[ 0.006      , 0.          , -0.23075114, 0.
↪1          ]]), 'metadata': <time_series_metadata.scheme.MetaData object at
↪0x7fcb34402b50>, 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-06-04 08:55:27.245239] (SineGenerator): Pack time: 0.000761
[2021-06-04 08:55:27.248372] (SineGenerator): Sending: [array([[0.006      , 0.
↪, 1.10758822, 0.1          ]]), <time_series_metadata.scheme.MetaData object at
↪0x7fcb34352730>]
[2021-06-04 08:55:27.232388] (MonitorAgent): Buffer: {'MultiWaveDataGenerator': {'data
↪': array([[ 0.          , 0.          , 1.14201382, 0.1          ],
[ 0.002      , 0.          , 0.85706774, 0.1          ],
[ 0.004      , 0.          , 0.36951548, 0.1          ],
[ 0.006      , 0.          , -0.23075114, 0.1          ]]), 'metadata': [<time_
↪series_metadata.scheme.MetaData object at 0x7fcb34407790>, <time_series_metadata.
↪scheme.MetaData object at 0x7fcb34412520>, <time_series_metadata.scheme.MetaData
↪object at 0x7fcb34402160>, <time_series_metadata.scheme.MetaData object at
↪0x7fcb34402b50>]], 'SineGenerator': {'data': array([[0.          , 0.          , 0.
↪28402764, 0.1          ]],
[0.002      , 0.          , 0.68388675, 0.1          ],
[0.004      , 0.          , 1.07205349, 0.1          ]]), 'metadata': [<time_series_
↪metadata.scheme.MetaData object at 0x7fcb34412e20>, <time_series_metadata.scheme.
↪MetaData object at 0x7fcb34412f40>, <time_series_metadata.scheme.MetaData object at
↪0x7fcb34402af0>]]}
[2021-06-04 08:55:27.236935] (MonitorAgent): Tproc: 0.020195
[2021-06-04 08:55:27.254223] (MonitorAgent): Received: {'from': 'SineGenerator', 'data
↪': array([[0.006      , 0.          , 1.10758822, 0.1          ]]), 'metadata': <time_
↪series_metadata.scheme.MetaData object at 0x7fcb34402ac0>, 'senderType':
↪'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-06-04 08:55:27.277781] (MonitorAgent): Buffer: {'MultiWaveDataGenerator': {'data
↪': array([[ 0.          , 0.          , 1.14201382, 0.1          ],
[ 0.002      , 0.          , 0.85706774, 0.1          ],
[ 0.004      , 0.          , 0.36951548, 0.1          ],
[ 0.006      , 0.          , -0.23075114, 0.1          ]]), 'metadata': [<time_
↪series_metadata.scheme.MetaData object at 0x7fcb34407790>, <time_series_metadata.
↪scheme.MetaData object at 0x7fcb34412520>, <time_series_metadata.scheme.MetaData
↪object at 0x7fcb34402160>, <time_series_metadata.scheme.MetaData object at
↪0x7fcb34402b50>]], 'SineGenerator': {'data': array([[0.          , 0.          , 0.
↪28402764, 0.1          ]],
[0.002      , 0.          , 0.68388675, 0.1          ],
[0.004      , 0.          , 1.07205349, 0.1          ],
[0.006      , 0.          , 1.10758822, 0.1          ]]), 'metadata': [<time_series_
↪metadata.scheme.MetaData object at 0x7fcb34412e20>, <time_series_metadata.scheme.
↪MetaData object at 0x7fcb34412f40>, <time_series_metadata.scheme.MetaData object at
↪0x7fcb34402af0>, <time_series_metadata.scheme.MetaData object at 0x7fcb34402ac0>]]}

```

(continued from previous page)

```

[2021-06-04 08:55:27.278651] (MonitorAgent): Tproc: 0.023881
[2021-06-04 08:55:28.211305] (MultiWaveDataGenerator): Pack time: 0.000477
[2021-06-04 08:55:28.212788] (MultiWaveDataGenerator): Sending: [array([[ 0.008      , 0.
→ 0.          , -0.83424568, 0.1          ]]), <time_series_metadata.scheme.MetaData_
→ object at 0x7fcb3440d3a0>]
[2021-06-04 08:55:28.214757] (MonitorAgent): Received: {'from':
→ 'MultiWaveDataGenerator', 'data': array([[ 0.008      , 0.          , -0.83424568, 0.
→ 1          ]]), 'metadata': <time_series_metadata.scheme.MetaData object at_
→ 0x7fcb344029d0>, 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-06-04 08:55:28.220546] (MonitorAgent): Buffer: {'MultiWaveDataGenerator': {'data
→ ': array([[ 0.          , 0.          , 1.14201382, 0.1          ],
→ [ 0.002      , 0.          , 0.85706774, 0.1          ],
→ [ 0.004      , 0.          , 0.36951548, 0.1          ],
→ [ 0.006      , 0.          , -0.23075114, 0.1          ],
→ [ 0.008      , 0.          , -0.83424568, 0.1          ]]), 'metadata': [<time_
→ series_metadata.scheme.MetaData object at 0x7fcb34407790>, <time_series_metadata.
→ scheme.MetaData object at 0x7fcb34412520>, <time_series_metadata.scheme.MetaData_
→ object at 0x7fcb34402160>, <time_series_metadata.scheme.MetaData object at_
→ 0x7fcb34402b50>, <time_series_metadata.scheme.MetaData object at 0x7fcb344029d0>]},
→ 'SineGenerator': {'data': array([[0.          , 0.          , 0.28402764, 0.1          ],
→ [0.002      , 0.          , 0.68388675, 0.1          ],
→ [0.004      , 0.          , 1.07205349, 0.1          ],
→ [0.006      , 0.          , 1.10758822, 0.1          ]]), 'metadata': [<time_series_
→ metadata.scheme.MetaData object at 0x7fcb34412e20>, <time_series_metadata.scheme.
→ MetaData object at 0x7fcb34412f40>, <time_series_metadata.scheme.MetaData object at_
→ 0x7fcb34402af0>, <time_series_metadata.scheme.MetaData object at 0x7fcb34402ac0>]}}}
[2021-06-04 08:55:28.221139] (MonitorAgent): Tproc: 0.006031
[2021-06-04 08:55:28.243869] (SineGenerator): Pack time: 0.000181
[2021-06-04 08:55:28.244381] (SineGenerator): Sending: [array([[0.008      , 0.
→ 0.53732789, 0.1          ]]), <time_series_metadata.scheme.MetaData object at_
→ 0x7fcb34352730>]
[2021-06-04 08:55:28.246182] (MonitorAgent): Received: {'from': 'SineGenerator', 'data
→ ': array([[0.008      , 0.          , 0.53732789, 0.1          ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fcb34402a90>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-06-04 08:55:28.248224] (MonitorAgent): Buffer: {'MultiWaveDataGenerator': {'data
→ ': array([[ 0.          , 0.          , 1.14201382, 0.1          ],
→ [ 0.002      , 0.          , 0.85706774, 0.1          ],
→ [ 0.004      , 0.          , 0.36951548, 0.1          ],
→ [ 0.006      , 0.          , -0.23075114, 0.1          ],
→ [ 0.008      , 0.          , -0.83424568, 0.1          ]]), 'metadata': [<time_
→ series_metadata.scheme.MetaData object at 0x7fcb34407790>, <time_series_metadata.
→ scheme.MetaData object at 0x7fcb34412520>, <time_series_metadata.scheme.MetaData_
→ object at 0x7fcb34402160>, <time_series_metadata.scheme.MetaData object at_
→ 0x7fcb34402b50>, <time_series_metadata.scheme.MetaData object at 0x7fcb344029d0>]},
→ 'SineGenerator': {'data': array([[0.          , 0.          , 0.28402764, 0.1          ],
→ [0.002      , 0.          , 0.68388675, 0.1          ],
→ [0.004      , 0.          , 1.07205349, 0.1          ],
→ [0.006      , 0.          , 1.10758822, 0.1          ],
→ [0.008      , 0.          , 0.53732789, 0.1          ]]), 'metadata': [<time_series_
→ metadata.scheme.MetaData object at 0x7fcb34412e20>, <time_series_metadata.scheme.
→ MetaData object at 0x7fcb34412f40>, <time_series_metadata.scheme.MetaData object at_
→ 0x7fcb34402af0>, <time_series_metadata.scheme.MetaData object at 0x7fcb34402ac0>,
→ <time_series_metadata.scheme.MetaData object at 0x7fcb34402a90>]}}}
[2021-06-04 08:55:28.248419] (MonitorAgent): Tproc: 0.002012
[2021-06-04 08:55:29.210769] (MultiWaveDataGenerator): Pack time: 0.00045
[2021-06-04 08:55:29.214621] (MonitorAgent): Received: {'from':
→ 'MultiWaveDataGenerator', 'data': array([[ 0.01          , 0.          , -0.00019087, 0.
→ 1          ]]), 'metadata': <time_series_metadata.scheme.MetaData object at_
→ 0x7fcb344029a0>, 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default'}

```


(continued from previous page)

```

[2021-06-04 08:55:29.211959] (MultiWaveDataGenerator): Sending: [array([[ 0.01      , 0.
→ 0.          , -0.99847908,  0.1          ]]), <time_series_metadata.scheme.MetaData_
→object at 0x7fcb3440d3a0>]
[2021-06-04 08:55:29.221246] (MonitorAgent): Buffer: {'MultiWaveDataGenerator': {'data
→': array([[ 0.          ,  0.          ,  1.14201382,  0.1          ],
→      [ 0.002      ,  0.          ,  0.85706774,  0.1          ],
→      [ 0.004      ,  0.          ,  0.36951548,  0.1          ],
→      [ 0.006      ,  0.          , -0.23075114,  0.1          ],
→      [ 0.008      ,  0.          , -0.83424568,  0.1          ],
→      [ 0.01       ,  0.          , -0.99847908,  0.1          ]]), 'metadata': [<time_
→series_metadata.scheme.MetaData object at 0x7fcb34407790>, <time_series_metadata.
→scheme.MetaData object at 0x7fcb34412520>, <time_series_metadata.scheme.MetaData_
→object at 0x7fcb34402160>, <time_series_metadata.scheme.MetaData object at 0x7fcb34402b50>, <time_series_metadata.scheme.MetaData object at 0x7fcb344029d0>,
→<time_series_metadata.scheme.MetaData object at 0x7fcb344029a0>]], 'SineGenerator':
→{'data': array([[0.          ,  0.          ,  0.28402764,  0.1          ],
→      [0.002      ,  0.          ,  0.68388675,  0.1          ],
→      [0.004      ,  0.          ,  1.07205349,  0.1          ],
→      [0.006      ,  0.          ,  1.10758822,  0.1          ],
→      [0.008      ,  0.          ,  0.53732789,  0.1          ]]), 'metadata': [<time_series_
→metadata.scheme.MetaData object at 0x7fcb34412e20>, <time_series_metadata.scheme.
→MetaData object at 0x7fcb34412f40>, <time_series_metadata.scheme.MetaData object at 0x7fcb34402af0>, <time_series_metadata.scheme.MetaData object at 0x7fcb34402ac0>,
→<time_series_metadata.scheme.MetaData object at 0x7fcb34402a90>]]}}
[2021-06-04 08:55:29.221505] (MonitorAgent): Tproc: 0.006553
[2021-06-04 08:55:29.242710] (SineGenerator): Pack time: 0.000168
[2021-06-04 08:55:29.243189] (SineGenerator): Sending: [array([[0.01      ,  0.
→ 0.00304184,  0.1          ]]), <time_series_metadata.scheme.MetaData object at 0x7fcb34352730>]
[2021-06-04 08:55:29.244172] (MonitorAgent): Received: {'from': 'SineGenerator', 'data
→': array([[0.01      ,  0.          ,  0.00304184,  0.1          ]]), 'metadata': <time_
→series_metadata.scheme.MetaData object at 0x7fcb34407a00>, 'senderType':
→'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-06-04 08:55:29.246427] (MonitorAgent): Buffer: {'MultiWaveDataGenerator': {'data
→': array([[ 0.          ,  0.          ,  1.14201382,  0.1          ],
→      [ 0.002      ,  0.          ,  0.85706774,  0.1          ],
→      [ 0.004      ,  0.          ,  0.36951548,  0.1          ],
→      [ 0.006      ,  0.          , -0.23075114,  0.1          ],
→      [ 0.008      ,  0.          , -0.83424568,  0.1          ],
→      [ 0.01       ,  0.          , -0.99847908,  0.1          ]]), 'metadata': [<time_
→series_metadata.scheme.MetaData object at 0x7fcb34407790>, <time_series_metadata.
→scheme.MetaData object at 0x7fcb34412520>, <time_series_metadata.scheme.MetaData_
→object at 0x7fcb34402160>, <time_series_metadata.scheme.MetaData object at 0x7fcb34402b50>, <time_series_metadata.scheme.MetaData object at 0x7fcb344029d0>,
→<time_series_metadata.scheme.MetaData object at 0x7fcb344029a0>]], 'SineGenerator':
→{'data': array([[0.          ,  0.          ,  0.28402764,  0.1          ],
→      [0.002      ,  0.          ,  0.68388675,  0.1          ],
→      [0.004      ,  0.          ,  1.07205349,  0.1          ],
→      [0.006      ,  0.          ,  1.10758822,  0.1          ],
→      [0.008      ,  0.          ,  0.53732789,  0.1          ],
→      [0.01       ,  0.          ,  0.00304184,  0.1          ]]), 'metadata': [<time_series_
→metadata.scheme.MetaData object at 0x7fcb34412e20>, <time_series_metadata.scheme.
→MetaData object at 0x7fcb34412f40>, <time_series_metadata.scheme.MetaData object at 0x7fcb34402af0>, <time_series_metadata.scheme.MetaData object at 0x7fcb34402ac0>,
→<time_series_metadata.scheme.MetaData object at 0x7fcb34402a90>, <time_series_
→metadata.scheme.MetaData object at 0x7fcb34407a00>]]}}
[2021-06-04 08:55:29.246649] (MonitorAgent): Tproc: 0.002336

```

(continues on next page)

(continued from previous page)

```

[2021-06-04 08:55:30.208630] (MultiWaveDataGenerator): Pack time: 0.000272
[2021-06-04 08:55:30.209391] (MultiWaveDataGenerator): Sending: [array([[ 0.012      , 0.
→ 0.          , -0.82945933,  0.1          ]]), <time_series_metadata.scheme.MetaData_
→ object at 0x7fcb3440d3a0>]
[2021-06-04 08:55:30.209873] (MonitorAgent): Received: {'from':
→ 'MultiWaveDataGenerator', 'data': array([[ 0.012      , 0.          , -0.82945933,  0.
→ 1          ]]), 'metadata': <time_series_metadata.scheme.MetaData object at_
→ 0x7fcb34402a60>, 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-06-04 08:55:30.212460] (MonitorAgent): Buffer: {'MultiWaveDataGenerator': {'data
→ ': array([[ 0.          , 0.          , 1.14201382,  0.1          ],
→ [ 0.002      , 0.          , 0.85706774,  0.1          ],
→ [ 0.004      , 0.          , 0.36951548,  0.1          ],
→ [ 0.006      , 0.          , -0.23075114,  0.1          ],
→ [ 0.008      , 0.          , -0.83424568,  0.1          ],
→ [ 0.01       , 0.          , -0.99847908,  0.1          ],
→ [ 0.012      , 0.          , -0.82945933,  0.1          ]]), 'metadata': [<time_
→ series_metadata.scheme.MetaData object at 0x7fcb34407790>, <time_series_metadata.
→ scheme.MetaData object at 0x7fcb34412520>, <time_series_metadata.scheme.MetaData_
→ object at 0x7fcb34402160>, <time_series_metadata.scheme.MetaData object at_
→ 0x7fcb34402b50>, <time_series_metadata.scheme.MetaData object at 0x7fcb344029d0>,
→ <time_series_metadata.scheme.MetaData object at 0x7fcb344029a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fcb34402a60>]}, 'SineGenerator': {'data':_
→ array([[0.          , 0.          , 0.28402764, 0.1          ],
→ [0.002      , 0.          , 0.68388675, 0.1          ],
→ [0.004      , 0.          , 1.07205349, 0.1          ],
→ [0.006      , 0.          , 1.10758822, 0.1          ],
→ [0.008      , 0.          , 0.53732789, 0.1          ],
→ [0.01       , 0.          , 0.00304184, 0.1          ]]), 'metadata': [<time_series_
→ metadata.scheme.MetaData object at 0x7fcb34412e20>, <time_series_metadata.scheme.
→ Metadata object at 0x7fcb34412f40>, <time_series_metadata.scheme.MetaData object at_
→ 0x7fcb34402af0>, <time_series_metadata.scheme.MetaData object at 0x7fcb34402ac0>,
→ <time_series_metadata.scheme.MetaData object at 0x7fcb34402a90>, <time_series_
→ metadata.scheme.MetaData object at 0x7fcb34407a00>]}}
[2021-06-04 08:55:30.212723] (MonitorAgent): Tproc: 0.002663
[2021-06-04 08:55:30.242541] (SineGenerator): Pack time: 0.000137
[2021-06-04 08:55:30.242887] (SineGenerator): Sending: [array([[ 0.012      , 0.
→ , -0.62866992,  0.1          ]]), <time_series_metadata.scheme.MetaData object at_
→ 0x7fcb34352730>]
[2021-06-04 08:55:30.243528] (MonitorAgent): Received: {'from': 'SineGenerator', 'data
→ ': array([[ 0.012      , 0.          , -0.62866992,  0.1          ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fcb34402a00>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-06-04 08:55:30.244778] (MonitorAgent): Buffer: {'MultiWaveDataGenerator': {'data
→ ': array([[ 0.          , 0.          , 1.14201382,  0.1          ],
→ [ 0.002      , 0.          , 0.85706774,  0.1          ],
→ [ 0.004      , 0.          , 0.36951548,  0.1          ],
→ [ 0.006      , 0.          , -0.23075114,  0.1          ],
→ [ 0.008      , 0.          , -0.83424568,  0.1          ],
→ [ 0.01       , 0.          , -0.99847908,  0.1          ],
→ [ 0.012      , 0.          , -0.82945933,  0.1          ]]), 'metadata': [<time_
→ series_metadata.scheme.MetaData object at 0x7fcb34407790>, <time_series_metadata.
→ scheme.MetaData object at 0x7fcb34412520>, <time_series_metadata.scheme.MetaData_
→ object at 0x7fcb34402160>, <time_series_metadata.scheme.MetaData object at_
→ 0x7fcb34402b50>, <time_series_metadata.scheme.MetaData object at 0x7fcb344029d0>,
→ <time_series_metadata.scheme.MetaData object at 0x7fcb344029a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fcb34402a60>]}, 'SineGenerator': {'data':_
→ array([[ 0.          , 0.          , 0.28402764,  0.1          ],

```

(continues on next page)

(continued from previous page)

```
[ 0.002      , 0.      , 0.68388675, 0.1      ],
[ 0.004      , 0.      , 1.07205349, 0.1      ],
[ 0.006      , 0.      , 1.10758822, 0.1      ],
[ 0.008      , 0.      , 0.53732789, 0.1      ],
[ 0.01       , 0.      , 0.00304184, 0.1      ],
[ 0.012      , 0.      , -0.62866992, 0.1      ]]), 'metadata': [<time_
↪series_metadata.scheme.Metadata object at 0x7fcb34412e20>, <time_series_metadata.
↪scheme.Metadata object at 0x7fcb34412f40>, <time_series_metadata.scheme.Metadata_
↪object at 0x7fcb34402af0>, <time_series_metadata.scheme.Metadata object at
↪0x7fcb34402ac0>, <time_series_metadata.scheme.Metadata object at 0x7fcb34402a90>,
↪<time_series_metadata.scheme.Metadata object at 0x7fcb34407a00>, <time_series_
↪metadata.scheme.Metadata object at 0x7fcb34402a00>]]}
[2021-06-04 08:55:30.244881] (MonitorAgent): Tproc: 0.001262
```

Working with signals carrying redundant information

17.1 Redundancy Agent – Determining redundancy in several similar signals

In this tutorial we generate four signals and supply the data to a Redundancy Agent. The agent calculates the best consistent estimate taking into account the supplied uncertainties. It rejects sensor values that may be erroneous. In this presented use case the sensors directly measure the measurand.

At the start of the main module we define all important parameters. For detailed descriptions of the parameters please refer to the [docstrings of the respective methods](#). Then we define the agents and start the network. The network and the calculated results can be monitored in a browser at the address <http://127.0.0.1:8050/>.

```
[3]: # %load redundancy_agent_four_signals.py
import numpy as np

from agentMET4FOF.agents.metrological_base_agents import (
    MetrologicalMonitorAgent,
)
from agentMET4FOF.agents.metrological_redundancy_agents import RedundancyAgent
from agentMET4FOF.agents.metrological_signal_agents import (
    MetrologicalGeneratorAgent,
)
from agentMET4FOF.network import AgentNetwork
from agentMET4FOF.streams.metrological_signal_streams import (
    MetrologicalMultiWaveGenerator,
)

def demonstrate_redundancy_agent_four_signals():
    batch_size = 10
    n_pr = batch_size
    fsam = 100
    intercept = 10
```

(continues on next page)

(continued from previous page)

```

frequencies = [6, 10, 8, 12]
phases = [1, 2, 3, 4]
amplitudes = [0.3, 0.2, 0.5, 0.4]
exp_unc_abs = 0.2
probability_limit = 0.95

# start agent network server
agent_network: AgentNetwork = AgentNetwork(dashboard_modules=True)

# Initialize signal generating class outside of agent framework.
signal_arr = [
    MetrologicalMultiWaveGenerator(
        sfreq=fsam,
        freq_arr=np.array([frequency]),
        ampl_arr=np.array([amplitude]),
        phase_ini_arr=np.array([phase]),
        intercept=intercept,
        value_unc=exp_unc_abs,
    )
    for frequency, amplitude, phase in zip(frequencies, amplitudes, phases)
]

# Data source agents.
source_agents = []
sensor_key_list = []
for count, signal in enumerate(signal_arr):
    sensor_key_list += ["Sensor" + str(count + 1)]
    source_agents += [
        agent_network.add_agent(
            name=sensor_key_list[-1], agentType=MetrologicalGeneratorAgent
        )
    ]
    source_agents[-1].init_parameters(signal=signal, batch_size=batch_size)

# Redundant data processing agent
redundancy_name1 = "RedundancyAgent1"
redundancy_agent1 = agent_network.add_agent(
    name=redundancy_name1, agentType=RedundancyAgent
)
redundancy_agent1.init_parameters(
    sensor_key_list=sensor_key_list,
    n_pr=n_pr,
    problim=probability_limit,
    calc_type="lcs",
)

# Initialize metrologically enabled plotting agent.
monitor_agent1 = agent_network.add_agent(
    name="MonitorAgent_SensorValues", agentType=MetrologicalMonitorAgent
)
monitor_agent2 = agent_network.add_agent(
    name="MonitorAgent_RedundantEstimate", agentType=MetrologicalMonitorAgent
)

# Bind agents.
for source_agent in source_agents:
    source_agent.bind_output(monitor_agent1)

```

(continues on next page)

(continued from previous page)

```

    source_agent.bind_output(redundancy_agent1)

    redundancy_agent1.bind_output(monitor_agent2)

    # Set all agents states to "Running".
    agent_network.set_running_state()

    # Allow for shutting down the network after execution.
    return agent_network

if __name__ == "__main__":
    demonstrate_redundancy_agent_four_signals()

```

Starting NameServer...

Broadcast server running on 0.0.0.0:9091

NS running on 127.0.0.1:3333 (127.0.0.1)

URI = PYRO:Pyro.NameServer@127.0.0.1:3333

INFO [2021-07-07 14:49:18.993883] (Sensor1): INITIALIZED

INFO [2021-07-07 14:49:19.035303] (Sensor2): INITIALIZED

INFO [2021-07-07 14:49:19.072919] (Sensor3): INITIALIZED

INFO [2021-07-07 14:49:19.110387] (Sensor4): INITIALIZED

INFO [2021-07-07 14:49:19.143509] (RedundancyAgent1): INITIALIZED

/home/ludwig10/code/agentMET4FOF/agentMET4FOF/metrological_streams.py:135:␣

↪UserWarning:

No uncertainty generator function specified. Setting to default (value_unc = constant,
↪ time_unc = 0).

```

-----
|
| Your agent network is starting up. Open your browser and |
| visit the agentMET4FOF dashboard on http://127.0.0.1:8050/ |
|
|
-----

```

INFO [2021-07-07 14:49:19.188230] (MonitorAgent_SensorValues): INITIALIZED

INFO [2021-07-07 14:49:19.220150] (MonitorAgent_RedundantEstimate): INITIALIZED

[2021-07-07 14:49:19.245339] (Sensor1): Connected output module: MonitorAgent_

↪SensorValues

[2021-07-07 14:49:19.253119] (Sensor1): Connected output module: RedundancyAgent1

[2021-07-07 14:49:19.261596] (Sensor2): Connected output module: MonitorAgent_

↪SensorValues

[2021-07-07 14:49:19.269916] (Sensor2): Connected output module: RedundancyAgent1

[2021-07-07 14:49:19.278184] (Sensor3): Connected output module: MonitorAgent_

↪SensorValues

[2021-07-07 14:49:19.292819] (Sensor3): Connected output module: RedundancyAgent1

[2021-07-07 14:49:19.302562] (Sensor4): Connected output module: MonitorAgent_

↪SensorValues

[2021-07-07 14:49:19.311015] (Sensor4): Connected output module: RedundancyAgent1

[2021-07-07 14:49:19.327098] (RedundancyAgent1): Connected output module:␣

↪MonitorAgent_RedundantEstimate

SET STATE: Running

[2021-07-07 14:49:20.009515] (Sensor1): Pack time: 0.003875

(continues on next page)

(continued from previous page)

```

[2021-07-07 14:49:20.011230] (Sensor1): Sending: [array([[ 0.          ,  0.          ,
→10.05758677,  0.2          ]]), <time_series_metadata.scheme.MetaData object at 0x7fecad47d550>]
[2021-07-07 14:49:20.013703] (RedundancyAgent1): Received: {'from': 'Sensor1', 'data':
→ array([[ 0.          ,  0.          , 10.05758677,  0.2          ]]), 'metadata': <time_
→series_metadata.scheme.MetaData object at 0x7fecad3d5e20>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:20.014299] (MonitorAgent_SensorValues): Received: {'from': 'Sensor1
→', 'data': array([[ 0.          ,  0.          , 10.05758677,  0.2          ]]), 'metadata
→': <time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:20.015177] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[ 0.          ,  0.          , 10.05758677,  0.2          ]]), 'metadata': [<time_
→series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>]}}
[2021-07-07 14:49:20.014521] (RedundancyAgent1): Buffer: {'Sensor1': array([[ 0.
→ ,  0.          , 10.05758677,  0.2          ]])}
[2021-07-07 14:49:20.015372] (MonitorAgent_SensorValues): Tproc: 0.000836
[2021-07-07 14:49:20.014668] (RedundancyAgent1): Tproc: 0.000764
[2021-07-07 14:49:20.044422] (MonitorAgent_SensorValues): Received: {'from': 'Sensor2
→', 'data': array([[0.          ,  0.          , 9.81226671, 0.2          ]]), 'metadata':
→<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:20.044547] (RedundancyAgent1): Received: {'from': 'Sensor2', 'data':
→ array([[0.          ,  0.          , 9.81226671, 0.2          ]]), 'metadata': <time_
→series_metadata.scheme.MetaData object at 0x7fecad3d5e50>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:20.042673] (Sensor2): Pack time: 0.000218
[2021-07-07 14:49:20.045087] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[ 0.          ,  0.          , 10.05758677,  0.2          ]]), 'metadata': [<time_
→series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>]}, 'Sensor2': {'data':
→array([[0.          ,  0.          , 9.81226671, 0.2          ]]), 'metadata': [<time_
→series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>]}}
[2021-07-07 14:49:20.045181] (RedundancyAgent1): Buffer: {'Sensor1': array([[ 0.
→ ,  0.          , 10.05758677,  0.2          ]]), 'Sensor2': array([[0.          , 0.
→ , 9.81226671, 0.2          ]])}
[2021-07-07 14:49:20.043540] (Sensor2): Sending: [array([[0.          ,  0.          , 9.
→81226671, 0.2          ]]), <time_series_metadata.scheme.MetaData object at 0x7fecad4806d0>]
[2021-07-07 14:49:20.046343] (MonitorAgent_SensorValues): Tproc: 0.001796
[2021-07-07 14:49:20.045304] (RedundancyAgent1): Tproc: 0.000627
[2021-07-07 14:49:20.078476] (Sensor3): Pack time: 0.000241
[2021-07-07 14:49:20.079205] (Sensor3): Sending: [array([[0.          ,  0.          , 9.
→40049983, 0.2          ]]), <time_series_metadata.scheme.MetaData object at 0x7fecad4826d0>]
[2021-07-07 14:49:20.080191] (RedundancyAgent1): Received: {'from': 'Sensor3', 'data':
→ array([[0.          ,  0.          , 9.40049983, 0.2          ]]), 'metadata': <time_
→series_metadata.scheme.MetaData object at 0x7fecad3d5f40>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:20.081131] (MonitorAgent_SensorValues): Received: {'from': 'Sensor3
→', 'data': array([[0.          ,  0.          , 9.40049983, 0.2          ]]), 'metadata':
→<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:20.082066] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[ 0.          ,  0.          , 10.05758677,  0.2          ]]), 'metadata': [<time_
→series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>]}, 'Sensor2': {'data':
→array([[0.          ,  0.          , 9.81226671, 0.2          ]]), 'metadata': [<time_
→series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>]}, 'Sensor3': {'data':
→array([[0.          ,  0.          , 9.40049983, 0.2          ]]), 'metadata': [<time_
→series_metadata.scheme.MetaData object at 0x7fecad3cea30>]}}

```

(continues on next page)

(continued from previous page)

```
[2021-07-07 14:49:20.081235] (RedundancyAgent1): Buffer: {'Sensor1': array([[ 0.
→ , 0.          , 10.05758677, 0.2          ]]), 'Sensor2': array([[0.
→ , 9.81226671, 0.2          ]]), 'Sensor3': array([[0.          , 0.          , 9.
→ 40049983, 0.2          ]])}
[2021-07-07 14:49:20.082157] (MonitorAgent_SensorValues): Tproc: 0.000925
[2021-07-07 14:49:20.081328] (RedundancyAgent1): Tproc: 0.00101
[2021-07-07 14:49:20.116046] (Sensor4): Pack time: 0.000222
[2021-07-07 14:49:20.116813] (MonitorAgent_SensorValues): Received: {'from': 'Sensor4
→ ', 'data': array([[0.          , 0.          , 9.63403863, 0.2          ]]), 'metadata':
→ <time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:20.116792] (Sensor4): Sending: [array([[0.          , 0.          , 9.
→ 63403863, 0.2          ]]), <time_series_metadata.scheme.MetaData object at
→ 0x7fecad482700>]
[2021-07-07 14:49:20.117888] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[ 0.          , 0.          , 10.05758677, 0.2          ]]), 'metadata': [<time_
→ series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>]}, 'Sensor2': {'data':
→ array([[0.          , 0.          , 9.81226671, 0.2          ]]), 'metadata': [<time_
→ series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>]}, 'Sensor3': {'data':
→ array([[0.          , 0.          , 9.40049983, 0.2          ]]), 'metadata': [<time_
→ series_metadata.scheme.MetaData object at 0x7fecad3cea30>]}, 'Sensor4': {'data':
→ array([[0.          , 0.          , 9.63403863, 0.2          ]]), 'metadata': [<time_
→ series_metadata.scheme.MetaData object at 0x7fecad3ce730>]}}
[2021-07-07 14:49:20.120198] (RedundancyAgent1): Received: {'from': 'Sensor4', 'data':
→ array([[0.          , 0.          , 9.63403863, 0.2          ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad3d5ee0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:20.121533] (RedundancyAgent1): Buffer: {'Sensor1': array([[ 0.
→ , 0.          , 10.05758677, 0.2          ]]), 'Sensor2': array([[0.
→ , 9.81226671, 0.2          ]]), 'Sensor3': array([[0.          , 0.          , 9.
→ 40049983, 0.2          ]]), 'Sensor4': array([[0.          , 0.          , 9.63403863, 0.2
→ , 9.81226671, 0.2          ]])}
[2021-07-07 14:49:20.117995] (MonitorAgent_SensorValues): Tproc: 0.001085
[2021-07-07 14:49:20.121671] (RedundancyAgent1): Tproc: 0.001357
Buffer size is 1, which is less than 10.
```

Not enough data for redundancy agent evaluation.

```
[2021-07-07 14:49:21.007073] (Sensor1): Pack time: 0.005616
[2021-07-07 14:49:21.010574] (Sensor1): Sending: [array([[0.01          , 0.          , 9.
→ 85659121, 0.2          ]]), <time_series_metadata.scheme.MetaData object at
→ 0x7fecad47d550>]
[2021-07-07 14:49:21.015850] (MonitorAgent_SensorValues): Received: {'from': 'Sensor1
→ ', 'data': array([[0.01          , 0.          , 9.85659121, 0.2          ]]), 'metadata':
→ <time_series_metadata.scheme.MetaData object at 0x7fecad3cea00>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:21.015851] (RedundancyAgent1): Received: {'from': 'Sensor1', 'data':
→ array([[0.01          , 0.          , 9.85659121, 0.2          ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad3d5ee0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:21.050802] (Sensor2): Pack time: 0.004355
[2021-07-07 14:49:21.078180] (Sensor3): Pack time: 0.000268
[2021-07-07 14:49:21.078841] (Sensor3): Sending: [array([[0.01          , 0.          , 9.
→ 33105188, 0.2          ]]), <time_series_metadata.scheme.MetaData object at
→ 0x7fecad4826d0>]
[2021-07-07 14:49:21.062134] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>]}, 'Sensor2': {'data': array([[0.
→ , 0.          , 9.81226671, 0.2          ]]), 'metadata': [<time_series_metadata.
→ scheme.MetaData object at 0x7fecad3ce7f0>]}, 'Sensor3': {'data': array([[0.
→ , 9.40049983, 0.2          ]]), 'metadata': [<time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cea30>]}, 'Sensor4': {'data': array([[0.
→ , 9.63403863, 0.2          ]]), 'metadata': [<time_series_metadata.scheme.MetaData
→ object at 0x7fecad3ce730>]}}
```

(continues on next page)

17.1. Redundancy Agent - Determining redundancy in several similar signals

83

(continued from previous page)

```

[2021-07-07 14:49:21.030692] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01]],
    [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01]]), 'Sensor2':
→array([[0.      , 0.      , 9.81226671, 0.2      ]]), 'Sensor3': array([[0.
→      , 0.      , 9.40049983, 0.2      ]]), 'Sensor4': array([[0.      , 0.
→      , 9.63403863, 0.2      ]])}
[2021-07-07 14:49:21.059748] (Sensor2): Sending: [array([[0.01      , 0.      , 9.
→62458464, 0.2      ]]), <time_series_metadata.scheme.MetaData object at
→0x7fecad4806d0>]
[2021-07-07 14:49:21.031615] (RedundancyAgent1): Tproc: 0.01496
[2021-07-07 14:49:21.066776] (MonitorAgent_SensorValues): Tproc: 0.050095
[2021-07-07 14:49:21.053804] (RedundancyAgent1): Received: {'from': 'Sensor2', 'data':
→ array([[0.01      , 0.      , 9.62458464, 0.2      ]]), 'metadata': <time_
→series_metadata.scheme.MetaData object at 0x7fecad3d5e80>, 'senderType':
→'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:21.068216] (MonitorAgent_SensorValues): Received: {'from': 'Sensor2
→', 'data': array([[0.01      , 0.      , 9.62458464, 0.2      ]]), 'metadata':
→<time_series_metadata.scheme.MetaData object at 0x7fecad3ceaf0>, 'senderType':
→'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:21.067974] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01]],
    [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01]]), 'Sensor2':
→array([[0.      , 0.      , 9.81226671, 0.2      ]],
    [0.01      , 0.      , 9.62458464, 0.2      ]]), 'Sensor3': array([[0.
→      , 0.      , 9.40049983, 0.2      ]]), 'Sensor4': array([[0.      , 0.
→      , 9.63403863, 0.2      ]])}
[2021-07-07 14:49:21.075919] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01]],
    [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→metadata.scheme.MetaData object at 0x7fecad3cea00>]}, 'Sensor2': {'data': array([[0.
→      , 0.      , 9.81226671, 0.2      ]],
    [0.01      , 0.      , 9.62458464, 0.2      ]]), 'metadata': [<time_series_
→metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_metadata.scheme.
→MetaData object at 0x7fecad3ceaf0>]}, 'Sensor3': {'data': array([[0.      , 0.
→      , 9.40049983, 0.2      ]]), 'metadata': [<time_series_metadata.scheme.MetaData
→object at 0x7fecad3cea30>]}, 'Sensor4': {'data': array([[0.      , 0.      , 9.
→63403863, 0.2      ]]), 'metadata': [<time_series_metadata.scheme.MetaData object
→at 0x7fecad3ce730>]}}
[2021-07-07 14:49:21.068204] (RedundancyAgent1): Tproc: 0.008848
[2021-07-07 14:49:21.076217] (MonitorAgent_SensorValues): Tproc: 0.003266
[2021-07-07 14:49:21.115605] (Sensor4): Pack time: 0.000165
[2021-07-07 14:49:21.081931] (RedundancyAgent1): Received: {'from': 'Sensor3', 'data':
→ array([[0.01      , 0.      , 9.33105188, 0.2      ]]), 'metadata': <time_
→series_metadata.scheme.MetaData object at 0x7fecad3d5f70>, 'senderType':
→'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:21.081709] (MonitorAgent_SensorValues): Received: {'from': 'Sensor3
→', 'data': array([[0.01      , 0.      , 9.33105188, 0.2      ]]), 'metadata':
→<time_series_metadata.scheme.MetaData object at 0x7fecad3ce700>, 'senderType':
→'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:21.116036] (Sensor4): Sending: [array([[0.01      , 0.      , 9.
→81544544, 0.2      ]]), <time_series_metadata.scheme.MetaData object at
→0x7fecad482700>]
[2021-07-07 14:49:21.084608] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01]],
    [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01]]), 'Sensor2':
→array([[0.      , 0.      , 9.81226671, 0.2      ]],

```

(continues on next page)

(continued from previous page)

```

[0.01      , 0.      , 9.62458464, 0.2      ]]), 'Sensor3': array([[0.
→ , 0.      , 9.40049983, 0.2      ],
[0.01      , 0.      , 9.33105188, 0.2      ]]), 'Sensor4': array([[0.
→ , 0.      , 9.63403863, 0.2      ]]])}
[2021-07-07 14:49:21.085668] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>]}, 'Sensor2': {'data': array([[0.
→ , 0.      , 9.81226671, 0.2      ],
[0.01      , 0.      , 9.62458464, 0.2      ]]), 'metadata': [<time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ceaf0>]}, 'Sensor3': {'data': array([[0.      , 0.
→ , 9.40049983, 0.2      ],
[0.01      , 0.      , 9.33105188, 0.2      ]]), 'metadata': [<time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce700>]}, 'Sensor4': {'data': array([[0.      , 0.
→ , 9.63403863, 0.2      ]]), 'metadata': [<time_series_metadata.scheme.MetaData_
→ object at 0x7fecad3ce730>]}}}
[2021-07-07 14:49:21.084815] (RedundancyAgent1): Tproc: 0.002653
[2021-07-07 14:49:21.085823] (MonitorAgent_SensorValues): Tproc: 0.003889
[2021-07-07 14:49:21.11944] (RedundancyAgent1): Received: {'from': 'Sensor4', 'data':
→ array([[0.01      , 0.      , 9.81544544, 0.2      ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad3d5ee0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:21.116997] (MonitorAgent_SensorValues): Received: {'from': 'Sensor4
→ ', 'data': array([[0.01      , 0.      , 9.81544544, 0.2      ]]), 'metadata':
→ <time_series_metadata.scheme.MetaData object at 0x7fecad3ceb20>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:21.121792] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01]]), 'Sensor2':
→ array([[0.      , 0.      , 9.81226671, 0.2      ],
[0.01      , 0.      , 9.62458464, 0.2      ]]), 'Sensor3': array([[0.
→ , 0.      , 9.40049983, 0.2      ],
[0.01      , 0.      , 9.33105188, 0.2      ]]), 'Sensor4': array([[0.
→ , 0.      , 9.63403863, 0.2      ],
[0.01      , 0.      , 9.81544544, 0.2      ]]])}
[2021-07-07 14:49:21.118684] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>]}, 'Sensor2': {'data': array([[0.
→ , 0.      , 9.81226671, 0.2      ],
[0.01      , 0.      , 9.62458464, 0.2      ]]), 'metadata': [<time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ceaf0>]}, 'Sensor3': {'data': array([[0.      , 0.
→ , 9.40049983, 0.2      ],
[0.01      , 0.      , 9.33105188, 0.2      ]]), 'metadata': [<time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce700>]}, 'Sensor4': {'data': array([[0.      , 0.
→ , 9.63403863, 0.2      ],
[0.01      , 0.      , 9.81544544, 0.2      ]]), 'metadata': [<time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ceb20>]}}}
Buffer size is [2021-07-07 14:49:21.121989] (RedundancyAgent1): Tproc: 0.001862
[2021-07-07 14:49:21.118792] (MonitorAgent_SensorValues): Tproc: 0.001691

```

(continues on next page)

(continued from previous page)

```

2 , which is less than 10 .
Not enough data for redundancy agent evaluation.
[2021-07-07 14:49:22.000958] (Sensor1): Pack time: 0.000504
[2021-07-07 14:49:22.003373] (Sensor1): Sending: [array([[0.02      , 0.          , 9.
→ 999462, 0.2          ]]), <time_series_metadata.scheme.MetaData object at 0x7fecad47d550>
→ ]
[2021-07-07 14:49:22.004863] (RedundancyAgent1): Received: {'from': 'Sensor1', 'data':
→ array([[0.02      , 0.          , 9.999462, 0.2          ]]), 'metadata': <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3d5ee0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:22.005235] (MonitorAgent_SensorValues): Received: {'from': 'Sensor1
→ ', 'data': array([[0.02      , 0.          , 9.999462, 0.2          ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad3ce8b0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:22.019157] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>]}, 'Sensor2': {'data': array([[0.          , 0.          ,
→ 9.81226671, 0.2          ],
→ [0.01          , 0.          , 9.62458464, 0.2          ]]), 'metadata': [<time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ceaf0>]}, 'Sensor3': {'data': array([[0.          , 0.          ,
→ 9.40049983, 0.2          ],
→ [0.01          , 0.          , 9.33105188, 0.2          ]]), 'metadata': [<time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce700>]}, 'Sensor4': {'data': array([[0.          , 0.          ,
→ 9.63403863, 0.2          ],
→ [0.01          , 0.          , 9.81544544, 0.2          ]]), 'metadata': [<time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ceb20>]}}
[2021-07-07 14:49:22.017290] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01]]), 'Sensor2':
→ array([[0.          , 0.          , 9.81226671, 0.2          ],
→ [0.01          , 0.          , 9.62458464, 0.2          ]]), 'Sensor3': array([[0.          ,
→ 0.          , 9.40049983, 0.2          ],
→ [0.01          , 0.          , 9.33105188, 0.2          ]]), 'Sensor4': array([[0.          ,
→ 0.          , 9.63403863, 0.2          ],
→ [0.01          , 0.          , 9.81544544, 0.2          ]])}
[2021-07-07 14:49:22.019977] (MonitorAgent_SensorValues): Tproc: 0.014061
[2021-07-07 14:49:22.018444] (RedundancyAgent1): Tproc: 0.01276
[2021-07-07 14:49:22.060122] (Sensor2): Pack time: 0.011586
[2021-07-07 14:49:22.082246] (Sensor3): Pack time: 0.001515
[2021-07-07 14:49:22.103090] (MonitorAgent_SensorValues): Received: {'from': 'Sensor2
→ ', 'data': array([[0.02      , 0.          , 9.85543299, 0.2          ]]), 'metadata':
→ <time_series_metadata.scheme.MetaData object at 0x7fecad3cebb0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:22.052865] (RedundancyAgent1): Received: {'from': 'Sensor2', 'data':
→ array([[0.02      , 0.          , 9.85543299, 0.2          ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad3d5f70>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:22.062683] (Sensor2): Sending: [array([[0.02      , 0.          , 9.
→ 85543299, 0.2          ]]), <time_series_metadata.scheme.MetaData object at
→ 0x7fecad4806d0>]

```

(continues on next page)

(continued from previous page)

```

[2021-07-07 14:49:22.086023] (Sensor3): Sending: [array([[0.02      , 0.      , 9.
→ 72930289, 0.2      ]]), <time_series_metadata.scheme.MetaData object at 0x7fecad4826d0>]
[2021-07-07 14:49:22.119263] (Sensor4): Pack time: 0.000268
[2021-07-07 14:49:22.121752] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>]}, 'Sensor2': {'data': array([[0.      , 0.      ,
→ 9.81226671, 0.2      ]],
→ [0.01      , 0.      , 9.62458464, 0.2      ],
→ [0.02      , 0.      , 9.85543299, 0.2      ]]), 'metadata': [<time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cebb0>]}, 'Sensor3': {'data': array([[0.      , 0.      , 9.40049983,
→ 0.2      ],
→ [0.01      , 0.      , 9.33105188, 0.2      ]]), 'metadata': [<time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce700>]}, 'Sensor4': {'data': array([[0.      , 0.      ,
→ 9.63403863, 0.2      ]],
→ [0.01      , 0.      , 9.81544544, 0.2      ]]), 'metadata': [<time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ceb20>]}}
[2021-07-07 14:49:22.116567] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01]]), 'Sensor2':
→ array([[0.      , 0.      , 9.81226671, 0.2      ],
→ [0.01      , 0.      , 9.62458464, 0.2      ],
→ [0.02      , 0.      , 9.85543299, 0.2      ]]), 'Sensor3': array([[0.      ,
→ 9.40049983, 0.2      ],
→ [0.01      , 0.      , 9.33105188, 0.2      ]]), 'Sensor4': array([[0.      ,
→ 9.63403863, 0.2      ],
→ [0.01      , 0.      , 9.81544544, 0.2      ]])}
[2021-07-07 14:49:22.120321] (Sensor4): Sending: [array([[ 0.02      , 0.      ,
→ 10.33981753, 0.2      ]]), <time_series_metadata.scheme.MetaData object at 0x7fecad482700>]
[2021-07-07 14:49:22.123789] (MonitorAgent_SensorValues): Tproc: 0.019983
[2021-07-07 14:49:22.117188] (RedundancyAgent1): Tproc: 0.062733
[2021-07-07 14:49:22.128020] (MonitorAgent_SensorValues): Received: {'from': 'Sensor3
→ ', 'data': array([[0.02      , 0.      , 9.72930289, 0.2      ]]), 'metadata':
→ <time_series_metadata.scheme.MetaData object at 0x7fecad3cec10>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:22.118922] (RedundancyAgent1): Received: {'from': 'Sensor3', 'data':
→ array([[0.02      , 0.      , 9.72930289, 0.2      ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad3d5e80>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:22.133617] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>]}, 'Sensor2': {'data': array([[0.      , 0.      ,
→ 9.81226671, 0.2      ]],

```

(continues on next page)

(continued from previous page)

```

    [0.01      , 0.          , 9.62458464, 0.2          ],
    [0.02      , 0.          , 9.85543299, 0.2          ]]), 'metadata': [<time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3cebb0>]], 'Sensor3': {'data': array([[0.          , 0.          , 9.40049983,
↳ 0.2          ],
    [0.01      , 0.          , 9.33105188, 0.2          ],
    [0.02      , 0.          , 9.72930289, 0.2          ]]), 'metadata': [<time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3cec10>]], 'Sensor4': {'data': array([[0.          , 0.          , 9.63403863,
↳ 0.2          ],
    [0.01      , 0.          , 9.81544544, 0.2          ]]), 'metadata': [<time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3ceb20>]]}
Buffer size is [2021-07-07 14:49:22.125997] (RedundancyAgent1): Buffer: {'Sensor1':
↳ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
    [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
    [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01]]), 'Sensor2':
↳ array([[0.          , 0.          , 9.81226671, 0.2          ],
    [0.01      , 0.          , 9.62458464, 0.2          ],
    [0.02      , 0.          , 9.85543299, 0.2          ]]), 'Sensor3': array([[0.
↳ , 0.          , 9.40049983, 0.2          ],
    [0.01      , 0.          , 9.33105188, 0.2          ],
    [0.02      , 0.          , 9.72930289, 0.2          ]]), 'Sensor4': array([[0.
↳ , 0.          , 9.63403863, 0.2          ],
    [0.01      , 0.          , 9.81544544, 0.2          ]])}
[2021-07-07 14:49:22.141930] (MonitorAgent_SensorValues): Tproc: 0.013113
[2021-07-07 14:49:22.130103] (RedundancyAgent1): Tproc: 0.01089
[2021-07-07 14:49:22.142661] (MonitorAgent_SensorValues): Received: {'from': 'Sensor4
↳ ', 'data': array([[ 0.02      , 0.          , 10.33981753, 0.2          ]]), 'metadata
↳ ': <time_series_metadata.scheme.MetaData object at 0x7fecad3cec70>, 'senderType':
↳ 'MetrologicalGeneratorAgent', 'channel': 'default'}
3[2021-07-07 14:49:22.136847] (RedundancyAgent1): Received: {'from': 'Sensor4', 'data
↳ ': array([[ 0.02      , 0.          , 10.33981753, 0.2          ]]), 'metadata': <time_
↳ series_metadata.scheme.MetaData object at 0x7fecad3d5ee0>, 'senderType':
↳ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:22.153547] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
↳ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
    [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
    [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3ce8b0>]], 'Sensor2': {'data': array([[0.          , 0.
↳ , 9.81226671, 0.2          ],
    [0.01      , 0.          , 9.62458464, 0.2          ],
    [0.02      , 0.          , 9.85543299, 0.2          ]]), 'metadata': [<time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3cebb0>]], 'Sensor3': {'data': array([[0.          , 0.          , 9.40049983,
↳ 0.2          ],
    [0.01      , 0.          , 9.33105188, 0.2          ],
    [0.02      , 0.          , 9.72930289, 0.2          ]]), 'metadata': [<time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3cec10>]], 'Sensor4': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
↳ 63403863e+00, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec70>]]}
[2021-07-07 14:49:22.148906] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
↳ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01]]), 'Sensor2':
↳ array([[0.
↳ 0.01
↳ 0.02
↳ , 0.
↳ , 0.
↳ , 9.81226671, 0.2
↳ ],
[0.01
↳ , 0.
↳ , 9.62458464, 0.2
↳ ],
[0.02
↳ , 0.
↳ , 9.85543299, 0.2
↳ ]]), 'Sensor3': array([[0.
↳ , 0.
↳ , 9.40049983, 0.2
↳ ],
[0.01
↳ , 0.
↳ , 9.33105188, 0.2
↳ ],
[0.02
↳ , 0.
↳ , 9.72930289, 0.2
↳ ]]), 'Sensor4': array([[0.
↳ 00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01]]))
, which is less than [2021-07-07 14:49:22.153718] (MonitorAgent_SensorValues): Tproc:
↳ 0.006877
10[2021-07-07 14:49:22.149517] (RedundancyAgent1): Tproc: 0.012471
.
Not enough data for redundancy agent evaluation.
[2021-07-07 14:49:23.001249] (Sensor1): Pack time: 0.000518
[2021-07-07 14:49:23.003768] (Sensor1): Sending: [array([[ 0.03
↳ , 0.
↳ , 10.08057762, 0.2
↳ ]]), <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad47d550>]
[2021-07-07 14:49:23.004714] (RedundancyAgent1): Received: {'from': 'Sensor1', 'data':
↳ array([[ 0.03
↳ , 0.
↳ , 10.08057762, 0.2
↳ ]]), 'metadata': <time_
↳ series_metadata.scheme.MetaData object at 0x7fecad3d5ee0>, 'senderType':
↳ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:23.004796] (MonitorAgent_SensorValues): Received: {'from': 'Sensor1
↳ ', 'data': array([[ 0.03
↳ , 0.
↳ , 10.08057762, 0.2
↳ ]]), 'metadata
↳ ': <time_series_metadata.scheme.MetaData object at 0x7fecad3cea90>, 'senderType':
↳ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:23.024964] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
↳ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3cea90>]], 'Sensor2': {'data': array([[0.
↳ , 0.
↳ , 9.81226671,
↳ 0.2
↳ ],
[0.01
↳ , 0.
↳ , 9.62458464, 0.2
↳ ],
[0.02
↳ , 0.
↳ , 9.85543299, 0.2
↳ ]]), 'metadata': [<time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3cebb0>]], 'Sensor3': {'data': array([[0.
↳ , 0.
↳ , 9.40049983,
↳ 0.2
↳ ],
[0.01
↳ , 0.
↳ , 9.33105188, 0.2
↳ ],
[0.02
↳ , 0.
↳ , 9.72930289, 0.2
↳ ]]), 'metadata': [<time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3cec10>]], 'Sensor4': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
↳ 63403863e+00, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec70>]]}
[2021-07-07 14:49:23.024965] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01]]), 'Sensor2':
→ array([[0.          , 0.          , 9.81226671, 0.2          ],
[0.01          , 0.          , 9.62458464, 0.2          ],
[0.02          , 0.          , 9.85543299, 0.2          ]]), 'Sensor3': array([[0.
→ , 0.          , 9.40049983, 0.2          ],
[0.01          , 0.          , 9.33105188, 0.2          ],
[0.02          , 0.          , 9.72930289, 0.2          ]]), 'Sensor4': array([[0.
→ 00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01]])}
[2021-07-07 14:49:23.047632] (Sensor2): Pack time: 0.001273
[2021-07-07 14:49:23.025808] (MonitorAgent_SensorValues): Tproc: 0.020348
[2021-07-07 14:49:23.025682] (RedundancyAgent1): Tproc: 0.020082
[2021-07-07 14:49:23.061407] (Sensor2): Sending: [array([[ 0.03          , 0.
→ 10.09273912, 0.2          ]]), <time_series_metadata.scheme.MetaData object at
→ 0x7fecad4806d0>]
[2021-07-07 14:49:23.078518] (Sensor3): Pack time: 0.000409
[2021-07-07 14:49:23.054290] (MonitorAgent_SensorValues): Received: {'from': 'Sensor2
→ ', 'data': array([[ 0.03          , 0.          , 10.09273912, 0.2          ]]), 'metadata
→ ': <time_series_metadata.scheme.MetaData object at 0x7fecad3ced30>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:23.090960] (RedundancyAgent1): Received: {'from': 'Sensor2', 'data':
→ array([[ 0.03          , 0.          , 10.09273912, 0.2          ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad3d5e80>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:23.079809] (Sensor3): Sending: [array([[ 0.03          , 0.
→ 10.13847663, 0.2          ]]), <time_series_metadata.scheme.MetaData object at
→ 0x7fecad4826d0>]
[2021-07-07 14:49:23.096215] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cea90>]], 'Sensor2': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→ 81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced30>]], 'Sensor3': {'data': array([[0.          , 0.          , 9.40049983,
→ 0.2          ],
[0.01          , 0.          , 9.33105188, 0.2          ],
[0.02          , 0.          , 9.72930289, 0.2          ]]), 'metadata': [<time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cec10>]], 'Sensor4': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→ 63403863e+00, 2.00000000e-01],

```

(continued from previous page)

```

[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01])), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec70>]]}
[2021-07-07 14:49:23.098862] (MonitorAgent_SensorValues): Tproc: 0.036086
[2021-07-07 14:49:23.100533] (MonitorAgent_SensorValues): Received: {'from': 'Sensor3
→ ', 'data': array([[ 0.03      ,  0.          , 10.13847663,  0.2          ]]), 'metadata
→ ': <time_series_metadata.scheme.MetaData object at 0x7fecad3ced90>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:23.109361] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01])), 'Sensor2':
→ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01])), 'Sensor3':
→ array([[0.          ,  0.          , 9.40049983,  0.2          ],
[0.01      ,  0.          , 9.33105188,  0.2          ],
[0.02      ,  0.          , 9.72930289,  0.2          ]]), 'Sensor4': array([[0.
→ 00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01]}}}
[2021-07-07 14:49:23.110163] (RedundancyAgent1): Tproc: 0.01711
[2021-07-07 14:49:23.112103] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01])), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cea90>]], 'Sensor2': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→ 81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01])), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced30>]], 'Sensor3': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→ 40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01])), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced90>]], 'Sensor4': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→ 63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01])), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec70>]]}

```

(continues on next page)

(continued from previous page)

```

[2021-07-07 14:49:23.115326] (Sensor4): Pack time: 0.000146
[2021-07-07 14:49:23.112999] (RedundancyAgent1): Received: {'from': 'Sensor3', 'data':
→ array([[ 0.03      ,  0.          , 10.13847663,  0.2          ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad3d5f70>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:23.115634] (MonitorAgent_SensorValues): Tproc: 0.012721
[2021-07-07 14:49:23.115816] (Sensor4): Sending: [array([[ 0.03      ,  0.          ,
→ 10.63988826,  0.2          ]]), <time_series_metadata.scheme.MetaData object at
→ 0x7fecad482700>]
[2021-07-07 14:49:23.122295] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01]]), 'Sensor2':
→ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01]]), 'Sensor3':
→ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01]]), 'Sensor4':
→ array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01]])}
[2021-07-07 14:49:23.116724] (MonitorAgent_SensorValues): Received: {'from': 'Sensor4
→ ', 'data': array([[ 0.03      ,  0.          , 10.63988826,  0.2          ]]), 'metadata
→ ': <time_series_metadata.scheme.MetaData object at 0x7fecad3cedf0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:23.122456] (RedundancyAgent1): Tproc: 0.008684
[2021-07-07 14:49:23.124353] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cea90>]}, 'Sensor2': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→ 81226671e+00, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced30>]}, 'Sensor3': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→ 40049983e+00, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced90>]}, 'Sensor4': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→ 63403863e+00, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01]], 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cedf0>]]}
[2021-07-07 14:49:23.124676] (RedundancyAgent1): Received: {'from': 'Sensor4', 'data':
→ array([[ 0.03      , 0.      , 10.63988826, 0.2      ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad3d5ee0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:23.124532] (MonitorAgent_SensorValues): Tproc: 0.00655
[2021-07-07 14:49:23.129010] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01]]), 'Sensor2':
→ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01]]), 'Sensor3':
→ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01]]), 'Sensor4':
→ array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01]])}
[2021-07-07 14:49:23.129574] (RedundancyAgent1): Tproc: 0.004748
Buffer size is 4 , which is less than 10 .
Not enough data for redundancy agent evaluation.
[2021-07-07 14:49:24.000868] (Sensor1): Pack time: 0.000566
[2021-07-07 14:49:24.003067] (Sensor1): Sending: [array([[0.04      , 0.      , 9.
→ 66887351, 0.2      ]]), <time_series_metadata.scheme.MetaData object at
→ 0x7fecad47d550>]
[2021-07-07 14:49:24.004152] (RedundancyAgent1): Received: {'from': 'Sensor1', 'data':
→ array([[0.04      , 0.      , 9.66887351, 0.2      ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad46b1c0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:24.005978] (MonitorAgent_SensorValues): Received: {'from': 'Sensor1
→ ', 'data': array([[0.04      , 0.      , 9.66887351, 0.2      ]]), 'metadata':
→ <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:24.023807] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
→ [4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cea90>, <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>]],
→ 'Sensor2': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.
→ 00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01]], 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced30>]], 'Sensor3': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→ 40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced90>]], 'Sensor4': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→ 63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cedf0>]]}
[2021-07-07 14:49:24.031224] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01]]), 'Sensor2':
→ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01]]), 'Sensor3':
→ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01]]), 'Sensor4':
→ array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01]])}
[2021-07-07 14:49:24.024723] (MonitorAgent_SensorValues): Tproc: 0.018109
[2021-07-07 14:49:24.031762] (RedundancyAgent1): Tproc: 0.027094
[2021-07-07 14:49:24.053222] (Sensor2): Pack time: 0.008118
NS shut down.
[2021-07-07 14:49:24.055885] (MonitorAgent_SensorValues): Received: {'from': 'Sensor2
→ ', 'data': array([[0.04, 0., 9.87107856, 0.2 ]]), 'metadata':
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:24.050573] (RedundancyAgent1): Received: {'from': 'Sensor2', 'data':
→ array([[0.04, 0., 9.87107856, 0.2 ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad46b3d0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:24.055786] (Sensor2): Sending: [array([[0.04, 0., 9.
→ 87107856, 0.2 ]]), <time_series_metadata.scheme.MetaData object at
→ 0x7fecad4806d0>]
[2021-07-07 14:49:24.080184] (Sensor3): Pack time: 0.000415
[2021-07-07 14:49:24.094510] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01]], 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cea90>, <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>]],
→ 'Sensor2': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.
→ 00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>]],
→ 'Sensor3': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.
→ 00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced90>]], 'Sensor4': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→ 63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cedf0>]]}
[2021-07-07 14:49:24.081616] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01]]), 'Sensor2':
→ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01]]), 'Sensor3':
→ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01]]), 'Sensor4':
→ array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01]])}
[2021-07-07 14:49:24.115317] (Sensor4): Pack time: 0.000148
[2021-07-07 14:49:24.081397] (Sensor3): Sending: [array([[ 0.04
→ 10.05755346, 0.2
→ 0x7fecad4826d0>]

```

(continues on next page)

(continued from previous page)

```

[2021-07-07 14:49:24.096476] (MonitorAgent_SensorValues): Tproc: 0.039947
[2021-07-07 14:49:24.082143] (RedundancyAgent1): Tproc: 0.030634
[2021-07-07 14:49:24.115746] (Sensor4): Sending: [array([[ 0.04      ,  0.      ,
→10.20797569,  0.2      ]]), <time_series_metadata.scheme.MetaData object at
→0x7fecad482700>]
[2021-07-07 14:49:24.097377] (MonitorAgent_SensorValues): Received: {'from': 'Sensor3
→', 'data': array([[ 0.04      ,  0.      , 10.05755346,  0.2      ]]), 'metadata
→': <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>, 'senderType':
→'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:24.086882] (RedundancyAgent1): Received: {'from': 'Sensor3', 'data':
→ array([[ 0.04      ,  0.      , 10.05755346,  0.2      ]]), 'metadata': <time_
→series_metadata.scheme.MetaData object at 0x7fecad46b3d0>, 'senderType':
→'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:24.101512] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.9946200e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
→ [4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→0x7fecad3cea90>, <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>]},
→'Sensor2': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.
→00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
→ [4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
→0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>]},
→'Sensor3': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.
→00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
→ [4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
→metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
→MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
→0x7fecad3ced90>, <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>]},
→'Sensor4': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.
→00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
→metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
→MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
→0x7fecad3cedf0>]}}
[2021-07-07 14:49:24.094842] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.9946200e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01]], 'Sensor2':
→array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01]]), 'Sensor3':
→array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01]]), 'Sensor4':
→array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01]])}
[2021-07-07 14:49:24.101812] (MonitorAgent_SensorValues): Tproc: 0.004319
[2021-07-07 14:49:24.095046] (RedundancyAgent1): Tproc: 0.007816
Buffer size is [2021-07-07 14:49:24.116662] (MonitorAgent_SensorValues): Received: {
→'from': 'Sensor4', 'data': array([[ 0.04      ,  0.      , 10.20797569,  0.2
→ ]]), 'metadata': <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>,
→'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:24.121756] (RedundancyAgent1): Received: {'from': 'Sensor4', 'data':
→ array([[ 0.04      ,  0.      , 10.20797569,  0.2
→ ]]), 'metadata': <time_
→series_metadata.scheme.MetaData object at 0x7fecad46b1c0>, 'senderType':
→'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:24.119812] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→0x7fecad3cea90>, <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>]},
→'Sensor2': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.
→00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
→0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>]},
→'Sensor3': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.
→00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
→metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
→MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
→0x7fecad3ced90>, <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>]},
→'Sensor4': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.
→00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01]], 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cedf0>, <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>]]}
[2021-07-07 14:49:24.126948] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01]]), 'Sensor2':
→ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01]]), 'Sensor3':
→ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01]]), 'Sensor4':
→ array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01]]))}
[2021-07-07 14:49:24.119949] (MonitorAgent_SensorValues): Tproc: 0.003144
[2021-07-07 14:49:24.127060] (RedundancyAgent1): Tproc: 0.005193
5, which is less than 10.
Not enough data for redundancy agent evaluation.
[2021-07-07 14:49:25.000773] (Sensor1): Pack time: 0.000549
[2021-07-07 14:49:25.003259] (Sensor1): Sending: [array([[0.05
→ , 0.
→ , 9.
→ 71880656, 0.2
→ ])], <time_series_metadata.scheme.MetaData object at
→ 0x7fecad47d550>]
[2021-07-07 14:49:25.004381] (MonitorAgent_SensorValues): Received: {'from': 'Sensor1
→ ', 'data': array([[0.05
→ , 0.
→ , 9.71880656, 0.2
→ ])], 'metadata':
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459b20>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:25.004406] (RedundancyAgent1): Received: {'from': 'Sensor1', 'data':
→ array([[0.05
→ , 0.
→ , 9.71880656, 0.2
→ ])], 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad46b3d0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:25.045974] (Sensor2): Pack time: 0.000723
[2021-07-07 14:49:25.027310] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cea90>, <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459b20>]], 'Sensor2': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>]],
↳ 'Sensor3': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.
↳ 00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3ced90>, <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>]],
↳ 'Sensor4': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.
↳ 00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3cedf0>, <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>]]}
[2021-07-07 14:49:25.034306] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
↳ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01]]), 'Sensor2':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01]]), 'Sensor3':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01]]), 'Sensor4':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01]])}
[2021-07-07 14:49:25.081564] (Sensor3): Pack time: 0.001522
[2021-07-07 14:49:25.048315] (Sensor2): Sending: [array([[ 0.05
↳ 10.09221065, 0.2
↳ ]]), <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad4806d0>]
[2021-07-07 14:49:25.028520] (MonitorAgent_SensorValues): Tproc: 0.023271
[2021-07-07 14:49:25.035852] (RedundancyAgent1): Tproc: 0.03091
[2021-07-07 14:49:25.084255] (Sensor3): Sending: [array([[ 0.05
↳ 10.36796753, 0.2
↳ ]]), <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad4826d0>]

```

(continues on next page)

(continued from previous page)

```

[2021-07-07 14:49:25.116279] (Sensor4): Pack time: 0.000292
[2021-07-07 14:49:25.117125] (Sensor4): Sending: [array([[ 0.05      ,  0.      ,
→10.04256986,  0.2      ]]), <time_series_metadata.scheme.MetaData object at 0x7fecad482700>]
[2021-07-07 14:49:25.058309] (MonitorAgent_SensorValues): Received: {'from': 'Sensor2', 'data': array([[ 0.05      ,  0.      , 10.09221065,  0.2      ]]), 'metadata': <time_series_metadata.scheme.MetaData object at 0x7fecad459af0>, 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:25.052796] (RedundancyAgent1): Received: {'from': 'Sensor2', 'data': array([[ 0.05      ,  0.      , 10.09221065,  0.2      ]]), 'metadata': <time_series_metadata.scheme.MetaData object at 0x7fecad46b3d0>, 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:25.077909] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01]]), 'Sensor2':
→array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01]]), 'Sensor3':
→array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01]]), 'Sensor4':
→array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01]]))
[2021-07-07 14:49:25.101770] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→0x7fecad3cea90>, <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>,
→<time_series_metadata.scheme.MetaData object at 0x7fecad459b20>]}, 'Sensor2': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
→0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>,
→<time_series_metadata.scheme.MetaData object at 0x7fecad459af0>]}, 'Sensor3': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3ced90>, <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>]],
↳ 'Sensor4': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.
↳ 00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3cedf0>, <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>]]}
Buffer size is [2021-07-07 14:49:25.078517] (RedundancyAgent1): Tproc: 0.025156
[2021-07-07 14:49:25.102277] (MonitorAgent_SensorValues): Tproc: 0.043267
6[2021-07-07 14:49:25.093159] (RedundancyAgent1): Received: {'from': 'Sensor3', 'data
↳ ': array([[ 0.05      ,  0.          , 10.36796753,  0.2          ]]), 'metadata': <time_
↳ series_metadata.scheme.MetaData object at 0x7fecad46b1c0>, 'senderType':
↳ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:25.105473] (MonitorAgent_SensorValues): Received: {'from': 'Sensor3
↳ ', 'data': array([[ 0.05      ,  0.          , 10.36796753,  0.2          ]]), 'metadata
↳ ': <time_series_metadata.scheme.MetaData object at 0x7fecad459970>, 'senderType':
↳ 'MetrologicalGeneratorAgent', 'channel': 'default'}
, which is less than 10[2021-07-07 14:49:25.118593] (RedundancyAgent1): Buffer: {
↳ 'Sensor1': array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01]]), 'Sensor2':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01]]), 'Sensor3':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01]]), 'Sensor4':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01]]))}
[2021-07-07 14:49:25.125922] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
↳ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01]], 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cea90>, <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459b20>]], 'Sensor2': {'data
→ ': array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459af0>]], 'Sensor3': {'data
→ ': array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced90>, <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459970>]], 'Sensor4': {'data
→ ': array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cedf0>, <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>]]}
.[2021-07-07 14:49:25.118823] (RedundancyAgent1): Tproc: 0.025122

[2021-07-07 14:49:25.127248] (MonitorAgent_SensorValues): Tproc: 0.021354
Not enough data for redundancy agent evaluation.[2021-07-07 14:49:25.119880]
→ (RedundancyAgent1): Received: {'from': 'Sensor4', 'data': array([[ 0.05
→ , 10.04256986, 0.2
→ ]]), 'metadata': <time_series_metadata.scheme.
→ MetaData object at 0x7fecad46b1c0>, 'senderType': 'MetrologicalGeneratorAgent',
→ 'channel': 'default'}
[2021-07-07 14:49:25.128182] (MonitorAgent_SensorValues): Received: {'from': 'Sensor4
→ ', 'data': array([[ 0.05
→ , 0.
→ , 10.04256986, 0.2
→ ]]), 'metadata
→ ': <time_series_metadata.scheme.MetaData object at 0x7fecad459bb0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}

[2021-07-07 14:49:25.128032] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01]], 'Sensor2':
→ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01]]), 'Sensor3':
→ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01]]), 'Sensor4':
→ array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01]])}
[2021-07-07 14:49:25.133657] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cea90>, <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459b20>]}, 'Sensor2': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459af0>]}, 'Sensor3': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced90>, <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459970>]}, 'Sensor4': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01]], 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cedf0>, <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459bb0>]]}
[2021-07-07 14:49:25.128168] (RedundancyAgent1): Tproc: 0.008096
[2021-07-07 14:49:25.133884] (MonitorAgent_SensorValues): Tproc: 0.00555
[2021-07-07 14:49:25.998685] (Sensor1): Pack time: 0.000196
[2021-07-07 14:49:25.999185] (Sensor1): Sending: [array([[0.06      , 0.
→ 70455528, 0.2      ]]), <time_series_metadata.scheme.MetaData object at
→ 0x7fecad47d550>]
[2021-07-07 14:49:26.000340] (MonitorAgent_SensorValues): Received: {'from': 'Sensor1
→ ', 'data': array([[0.06      , 0.
→ 70455528, 0.2      ]]), 'metadata':
→ <time_series_metadata.scheme.MetaData object at 0x7fecad3ce4c0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:26.000331] (RedundancyAgent1): Received: {'from': 'Sensor1', 'data':
→ array([[0.06      , 0.
→ 70455528, 0.2      ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad46b1c0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:26.004294] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
→ [4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
→ [5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
→ [6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01]]), 'Sensor2':
→ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
→ [4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
→ [5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01]]), 'Sensor3':
→ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
→ [4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
→ [5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01]]), 'Sensor4':
→ array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
→ [4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
→ [5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01]])}
[2021-07-07 14:49:26.004583] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
→ [4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
→ [5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
→ [6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cea90>, <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459b20>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce4c0>]}, 'Sensor2': {'data': array([[0.
→ 00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],

```

```
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459af0>]], 'Sensor3': {'data
→ ': array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced90>, <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459970>]], 'Sensor4': {'data
→ ': array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cedf0>, <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459bb0>]]}]
[2021-07-07 14:49:26.004392] (RedundancyAgent1): Tproc: 0.00391
[2021-07-07 14:49:26.004709] (MonitorAgent_SensorValues): Tproc: 0.004226
[2021-07-07 14:49:26.041176] (Sensor2): Pack time: 0.000134
[2021-07-07 14:49:26.041835] (MonitorAgent_SensorValues): Received: {'from': 'Sensor2
→ ', 'data': array([[ 0.06          ,  0.          , 10.17661344,  0.2          ]]), 'metadata
→ ': <time_series_metadata.scheme.MetaData object at 0x7fecad3ce670>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:26.041503] (Sensor2): Sending: [array([[ 0.06          ,  0.          ,
→ 10.17661344,  0.2          ]]), <time_series_metadata.scheme.MetaData object at
→ 0x7fecad4806d0>]
[2021-07-07 14:49:26.046772] (RedundancyAgent1): Received: {'from': 'Sensor2', 'data':
→ array([[ 0.06          ,  0.          , 10.17661344,  0.2          ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad46b1c0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:26.045984] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
```

```

    <time_series_metadata.scheme.Metadata object at 0x7fecad459b20>, <time_series_
    metadata.scheme.Metadata object at 0x7fecad33e490>]], <array>]], <array>]], <array>]]

```

(continued from previous page)

```

[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>,
↳ <time_series_metadata.scheme.MetaData object at 0x7fecad459af0>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce670>]], 'Sensor3': {'data': array([[0.
↳ 00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3ced90>, <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>,
↳ <time_series_metadata.scheme.MetaData object at 0x7fecad459970>]], 'Sensor4': {'data
↳ ': array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3cedf0>, <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>,
↳ <time_series_metadata.scheme.MetaData object at 0x7fecad459bb0>]]}
[2021-07-07 14:49:26.048356] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
↳ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01]]), 'Sensor2':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01]]), 'Sensor3':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01]]), 'Sensor4':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],

```

(continues on next page)

```

[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01]]})
[2021-07-07 14:49:26.046153] (MonitorAgent_SensorValues): Tproc: 0.00423
[2021-07-07 14:49:26.048471] (RedundancyAgent1): Tproc: 0.001597
[2021-07-07 14:49:26.076987] (Sensor3): Pack time: 0.00014
[2021-07-07 14:49:26.077908] (RedundancyAgent1): Received: {'from': 'Sensor3', 'data':
→ array([[ 0.06      ,  0.          , 10.48463468,  0.2          ]]), 'metadata': <time_
→ series_metadata.scheme.Metadata object at 0x7fecad46b3d0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:26.077584] (MonitorAgent_SensorValues): Received: {'from': 'Sensor3
→ ', 'data': array([[ 0.06      ,  0.          , 10.48463468,  0.2          ]]), 'metadata
→ ': <time_series_metadata.scheme.Metadata object at 0x7fecad3ce8e0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:26.077343] (Sensor3): Sending: [array([[ 0.06      ,  0.          ,
→ 10.48463468,  0.2          ]]), <time_series_metadata.scheme.Metadata object at
→ 0x7fecad4826d0>]
[2021-07-07 14:49:26.080354] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01]]), 'Sensor2':
→ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01]]), 'Sensor3':
→ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01]]), 'Sensor4':
→ array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01]]})
[2021-07-07 14:49:26.080207] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.Metadata object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.Metadata object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ Metadata object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.Metadata object at
→ 0x7fecad3cea90>, <time_series_metadata.scheme.Metadata object at 0x7fecad4826d0>],
→ <time_series_metadata.scheme.Metadata object at 0x7fecad459b20>, <time_series_
→ metadata.scheme.Metadata object at 0x7fecad3ce4c0>]], 'Sensor2': {'data': array([[0.
→ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.Metadata object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.Metadata object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ Metadata object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.Metadata object at
→ 0x7fecad3cea90>, <time_series_metadata.scheme.Metadata object at 0x7fecad4826d0>],
→ <time_series_metadata.scheme.Metadata object at 0x7fecad459b20>, <time_series_
→ metadata.scheme.Metadata object at 0x7fecad3ce4c0>]]}
[2021-07-07 14:49:26.080207] (RedundancyAgent1): Determining redundancy in several similar signals

```


(continued from previous page)

```

[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>,
↳ <time_series_metadata.scheme.MetaData object at 0x7fecad459af0>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce670>]], 'Sensor3': {'data': array([[0.
↳ 00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3ced90>, <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>,
↳ <time_series_metadata.scheme.MetaData object at 0x7fecad459970>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce8e0>]], 'Sensor4': {'data': array([[0.
↳ 00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3cedf0>, <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>,
↳ <time_series_metadata.scheme.MetaData object at 0x7fecad459bb0>]]}
[2021-07-07 14:49:26.080303] (MonitorAgent_SensorValues): Tproc: 0.002634
[2021-07-07 14:49:26.080417] (RedundancyAgent1): Tproc: 0.002434
[2021-07-07 14:49:26.115261] (Sensor4): Pack time: 0.000242
[2021-07-07 14:49:26.116660] (RedundancyAgent1): Received: {'from': 'Sensor4', 'data':
↳ array([[0.06, 0., 9.7540184, 0.2]]), 'metadata': <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad46b3d0>, 'senderType':
↳ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:26.116479] (MonitorAgent_SensorValues): Received: {'from': 'Sensor4
↳ ', 'data': array([[0.06, 0., 9.7540184, 0.2]]), 'metadata': <time_
↳ series_metadata.scheme.MetaData object at 0x7fecad3cee50>, 'senderType':
↳ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:26.115684] (Sensor4): Sending: [array([[0.06, 0., 9.
↳ 7540184, 0.2]]), <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad482700>]
[2021-07-07 14:49:26.118065] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
↳ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

        [6.00000000e-02, 0.00000000e+00, 9.7045528e+00, 2.00000000e-01]]), 'Sensor2':
→ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
        [1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
        [2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
        [3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
        [4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
        [5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
        [6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01]]), 'Sensor3':
→ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
        [1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
        [2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
        [3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
        [4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
        [5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
        [6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01]]), 'Sensor4':
→ array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
        [1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
        [2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
        [3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
        [4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
        [5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
        [6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01]])}
[2021-07-07 14:49:26.119262] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
        [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
        [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
        [3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
        [4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
        [5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
        [6.00000000e-02, 0.00000000e+00, 9.7045528e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cea90>, <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459b20>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce4c0>]}, 'Sensor2': {'data': array([[0.
→ 00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
        [1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
        [2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
        [3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
        [4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
        [5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
        [6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459af0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce670>]}, 'Sensor3': {'data': array([[0.
→ 00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
        [1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
        [2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
        [3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
        [4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
        [5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
        [6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced90>, <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad4599f0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce8e0>]}, 'Sensor4': {'data': array([[0.
→ 00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],

```

(continued from previous page)

```

[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cedf0>, <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459bb0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cee50>]]}
[2021-07-07 14:49:26.119350] (MonitorAgent_SensorValues): Tproc: 0.002783
[2021-07-07 14:49:26.118130] (RedundancyAgent1): Tproc: 0.001394
Buffer size is 7, which is less than 10.
Not enough data for redundancy agent evaluation.
[2021-07-07 14:49:27.007522] (MonitorAgent_SensorValues): Received: {'from': 'Sensor1'
→, 'data': array([[0.07, 0., 9.64395692, 0.2]]), 'metadata':
→ <time_series_metadata.scheme.MetaData object at 0x7fecad3ceeb0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:27.003888] (Sensor1): Pack time: 0.000931
[2021-07-07 14:49:27.007780] (RedundancyAgent1): Received: {'from': 'Sensor1', 'data':
→ array([[0.07, 0., 9.64395692, 0.2]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad46b3d0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:27.006537] (Sensor1): Sending: [array([[0.07, 0., 9.
→ 64395692, 0.2]]), <time_series_metadata.scheme.MetaData object at
→ 0x7fecad47d550>]
[2021-07-07 14:49:27.064438] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
→ [4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
→ [5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
→ [6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01],
→ [7.00000000e-02, 0.00000000e+00, 9.64395692e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cea90>, <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459b20>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce4c0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ceeb0>]], 'Sensor2': {'data': array([[0.00000000e+00, 0.
→ 00000000e+00, 9.81226671e+00, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
→ [4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
→ [5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
→ [6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459af0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce670>]], 'Sensor3': {'data': array([[0.
→ 00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.Metadata object at 0x7fecad3cea30>, <time_series_
↳ metadata.scheme.Metadata object at 0x7fecad3ce700>, <time_series_metadata.scheme.
↳ Metadata object at 0x7fecad3cec10>, <time_series_metadata.scheme.Metadata object at
↳ 0x7fecad3ced90>, <time_series_metadata.scheme.Metadata object at 0x7fecad459b80>,
↳ <time_series_metadata.scheme.Metadata object at 0x7fecad459970>, <time_series_
↳ metadata.scheme.Metadata object at 0x7fecad3ce8e0>]], 'Sensor4': {'data': array([[0.
↳ 00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.Metadata object at 0x7fecad3ce730>, <time_series_
↳ metadata.scheme.Metadata object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
↳ Metadata object at 0x7fecad3cec70>, <time_series_metadata.scheme.Metadata object at
↳ 0x7fecad3cedf0>, <time_series_metadata.scheme.Metadata object at 0x7fecad459db0>,
↳ <time_series_metadata.scheme.Metadata object at 0x7fecad459bb0>, <time_series_
↳ metadata.scheme.Metadata object at 0x7fecad3cee50>]]}
[2021-07-07 14:49:27.049495] (Sensor2): Pack time: 0.00217
[2021-07-07 14:49:27.082978] (Sensor3): Pack time: 0.000381
[2021-07-07 14:49:27.093177] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
↳ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.64395692e+00, 2.00000000e-01]]), 'Sensor2':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01]]), 'Sensor3':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01]]), 'Sensor4':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01]]]}

```

(continues on next page)

(continued from previous page)

```

[2021-07-07 14:49:27.065373] (MonitorAgent_SensorValues): Tproc: 0.051613
[2021-07-07 14:49:27.053082] (Sensor2): Sending: [array([[ 0.07      ,  0.      ,
→10.10629053,  0.2      ]]), <time_series_metadata.scheme.MetaData object at 0x7fecad4806d0>]
[2021-07-07 14:49:27.086959] (Sensor3): Sending: [array([[ 0.07      ,  0.      ,
→10.39382334,  0.2      ]]), <time_series_metadata.scheme.MetaData object at 0x7fecad4826d0>]
[2021-07-07 14:49:27.096507] (RedundancyAgent1): Tproc: 0.088083
[2021-07-07 14:49:27.085681] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
      [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
      [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
      [3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
      [4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
      [5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
      [6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01],
      [7.00000000e-02, 0.00000000e+00, 9.64395692e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at 0x7fecad3cea90>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459b20>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce4c0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ceeb0>]}, 'Sensor2': {'data': array([[0.00000000e+00, 0.
→ 00000000e+00, 9.81226671e+00, 2.00000000e-01],
      [1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
      [2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
      [3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
      [4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
      [5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
      [6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01],
      [7.00000000e-02, 0.00000000e+00, 1.01062905e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at 0x7fecad3ced30>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459af0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce670>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cecd0>]}, 'Sensor3': {'data': array([[0.00000000e+00, 0.
→ 00000000e+00, 9.40049983e+00, 2.00000000e-01],
      [1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
      [2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
      [3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
      [4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
      [5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
      [6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at 0x7fecad3ced90>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459970>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce8e0>]}, 'Sensor4': {'data': array([[0.
→ 00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
      [1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
      [2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
      [3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
      [4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01]], 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cedf0>, <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459bb0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cee50>]]}
[2021-07-07 14:49:27.097338] (RedundancyAgent1): Received: {'from': 'Sensor2', 'data':
→ array([[ 0.07      ,  0.          , 10.10629053,  0.2          ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad46b3d0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:27.073893] (MonitorAgent_SensorValues): Received: {'from': 'Sensor2
→ ', 'data': array([[ 0.07      ,  0.          , 10.10629053,  0.2          ]]), 'metadata
→ ': <time_series_metadata.scheme.MetaData object at 0x7fecad3cecd0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:27.108499] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.64395692e+00, 2.00000000e-01]]), 'Sensor2':
→ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.01062905e+01, 2.00000000e-01]]), 'Sensor3':
→ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01]]), 'Sensor4':
→ array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01]]])}
[2021-07-07 14:49:27.085880] (MonitorAgent_SensorValues): Tproc: 0.011452
[2021-07-07 14:49:27.108738] (RedundancyAgent1): Tproc: 0.011242
[2021-07-07 14:49:27.087157] (MonitorAgent_SensorValues): Received: {'from': 'Sensor3
→ ', 'data': array([[ 0.07      ,  0.          , 10.39382334,  0.2          ]]), 'metadata
→ ': <time_series_metadata.scheme.MetaData object at 0x7fecad3ceb80>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:27.116905] (Sensor4): Pack time: 0.000174
[2021-07-07 14:49:27.110424] (RedundancyAgent1): Received: {'from': 'Sensor3', 'data':
→ array([[ 0.07      ,  0.          , 10.39382334,  0.2          ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad46b1c0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}

```

(continues on next page)

(continued from previous page)

```
[2021-07-07 14:49:27.095596] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
      [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
      [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
      [3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
      [4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
      [5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
      [6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01],
      [7.00000000e-02, 0.00000000e+00, 9.64395692e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cea90>, <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459b20>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce4c0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ceeb0>]], 'Sensor2': {'data': array([[0.00000000e+00, 0.
→ 00000000e+00, 9.81226671e+00, 2.00000000e-01],
      [1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
      [2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
      [3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
      [4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
      [5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
      [6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01],
      [7.00000000e-02, 0.00000000e+00, 1.01062905e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459af0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce670>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cecd0>]], 'Sensor3': {'data': array([[0.00000000e+00, 0.
→ 00000000e+00, 9.40049983e+00, 2.00000000e-01],
      [1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
      [2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
      [3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
      [4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
      [5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
      [6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01],
      [7.00000000e-02, 0.00000000e+00, 1.03938233e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cecl0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced90>, <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459970>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce8e0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ceb80>]], 'Sensor4': {'data': array([[0.00000000e+00, 0.
→ 00000000e+00, 9.63403863e+00, 2.00000000e-01],
      [1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
      [2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
      [3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
      [4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
      [5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
      [6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cedf0>, <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459bb0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cee50>]]}
```

(continues on next page)

(continued from previous page)

```

[2021-07-07 14:49:27.117323] (Sensor4): Sending: [array([[0.07      , 0.      , 9.
→5119209, 0.2      ]]), <time_series_metadata.scheme.MetaData object at 0x7fecad482700>]
[2021-07-07 14:49:27.118333] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.64395692e+00, 2.00000000e-01]]), 'Sensor2':
→array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.01062905e+01, 2.00000000e-01]]), 'Sensor3':
→array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.03938233e+01, 2.00000000e-01]]), 'Sensor4':
→array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01]]))
[2021-07-07 14:49:27.095824] (MonitorAgent_SensorValues): Tproc: 0.008473
[2021-07-07 14:49:27.114747] (RedundancyAgent1): Tproc: 0.004163
[2021-07-07 14:49:27.118762] (MonitorAgent_SensorValues): Received: {'from': 'Sensor4
→', 'data': array([[0.07      , 0.      , 9.5119209, 0.2      ]]), 'metadata': <time_
→series_metadata.scheme.MetaData object at 0x7fecad3cefa0>, 'senderType':
→'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:27.118666] (RedundancyAgent1): Received: {'from': 'Sensor4', 'data':
→ array([[0.07      , 0.      , 9.5119209, 0.2      ]]), 'metadata': <time_series_
→metadata.scheme.MetaData object at 0x7fecad46b1c0>, 'senderType':
→'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:27.127116] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.64395692e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→0x7fecad3cea90>, <time_series_metadata.scheme.MetaData object at 0x7fecad3ce4c0>,
→<time_series_metadata.scheme.MetaData object at 0x7fecad459b20>, <time_series_
→metadata.scheme.MetaData object at 0x7fecad3ce4c0>, <time_series_metadata.scheme.
→MetaData object at 0x7fecad3ceeb0>]}, 'Sensor2': {'data': array([[0.00000000e+00, 0.
→00000000e+00, 9.81226671e+00, 2.00000000e-01],

```


(continued from previous page)

```

[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.01062905e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>,
↳ <time_series_metadata.scheme.MetaData object at 0x7fecad459af0>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce670>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cecd0>]], 'Sensor3': {'data': array([[0.00000000e+00, 0.
↳ 00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.03938233e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3ced90>, <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>,
↳ <time_series_metadata.scheme.MetaData object at 0x7fecad459970>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce8e0>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3ceb80>]], 'Sensor4': {'data': array([[0.00000000e+00, 0.
↳ 00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.51192090e+00, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3cedf0>, <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>,
↳ <time_series_metadata.scheme.MetaData object at 0x7fecad459bb0>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3cee50>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cefa0>]]}
[2021-07-07 14:49:27.122042] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
↳ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.64395692e+00, 2.00000000e-01]]), 'Sensor2':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.01062905e+01, 2.00000000e-01]], 'Sensor3':
→array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.03938233e+01, 2.00000000e-01]], 'Sensor4':
→array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.51192090e+00, 2.00000000e-01]])}
[2021-07-07 14:49:27.127213] (MonitorAgent_SensorValues): Tproc: 0.00831
[2021-07-07 14:49:27.122187] (RedundancyAgent1): Tproc: 0.003364
Buffer size is 8 , which is less than 10 .
Not enough data for redundancy agent evaluation.
[2021-07-07 14:49:27.998756] (Sensor1): Pack time: 0.000271
[2021-07-07 14:49:27.999481] (Sensor1): Sending: [array([[0.08      , 0.          , 9.
→9701676, 0.2          ]]), <time_series_metadata.scheme.MetaData object at
→0x7fecad47d550>]
[2021-07-07 14:49:28.000684] (RedundancyAgent1): Received: {'from': 'Sensor1', 'data':
→ array([[0.08      , 0.          , 9.9701676, 0.2          ]]), 'metadata': <time_series_
→metadata.scheme.MetaData object at 0x7fecad46b1c0>, 'senderType':
→'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:28.002045] (MonitorAgent_SensorValues): Received: {'from': 'Sensor1
→', 'data': array([[0.08      , 0.          , 9.9701676, 0.2          ]]), 'metadata': <time_
→series_metadata.scheme.MetaData object at 0x7fecad459d00>, 'senderType':
→'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:28.008939] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.64395692e+00, 2.00000000e-01],
[8.00000000e-02, 0.00000000e+00, 9.97016760e+00, 2.00000000e-01]]], 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→0x7fecad3cea90>, <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>,
→<time_series_metadata.scheme.MetaData object at 0x7fecad459b20>, <time_series_
→metadata.scheme.MetaData object at 0x7fecad3ce4c0>, <time_series_metadata.scheme.
→MetaData object at 0x7fecad3ceeb0>, <time_series_metadata.scheme.MetaData object at
→0x7fecad459d00>]}, 'Sensor2': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.01062905e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>,
↳ <time_series_metadata.scheme.MetaData object at 0x7fecad459af0>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce670>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cecd0>]], 'Sensor3': {'data': array([[0.00000000e+00, 0.
↳ 00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.03938233e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3ced90>, <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>,
↳ <time_series_metadata.scheme.MetaData object at 0x7fecad459970>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce8e0>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3ceb80>]], 'Sensor4': {'data': array([[0.00000000e+00, 0.
↳ 00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.51192090e+00, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3cedf0>, <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>,
↳ <time_series_metadata.scheme.MetaData object at 0x7fecad459bb0>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3cee50>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cefa0>]]}
[2021-07-07 14:49:28.010147] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
↳ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.64395692e+00, 2.00000000e-01],
[8.00000000e-02, 0.00000000e+00, 9.97016760e+00, 2.00000000e-01]]), 'Sensor2':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],

```

(continues on next page)

17.1. Redundancy Agent – Determining redundancy in several similar signals

(continued from previous page)

```

[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.03938233e+01, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3ced90>, <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>,
↳ <time_series_metadata.scheme.MetaData object at 0x7fecad459970>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce8e0>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3ceb80>]], 'Sensor4': {'data': array([[0.00000000e+00, 0.
↳ 00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.51192090e+00, 2.00000000e-01]]), 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3cedf0>, <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>,
↳ <time_series_metadata.scheme.MetaData object at 0x7fecad459bb0>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3cee50>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cefa0>]]}
[2021-07-07 14:49:28.045903] (RedundancyAgent1): Received: {'from': 'Sensor2', 'data':
↳ array([[ 0.08      , 0.          , 10.3098588, 0.2          ]]), 'metadata': <time_
↳ series_metadata.scheme.MetaData object at 0x7fecad46b1c0>, 'senderType':
↳ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:28.048715] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
↳ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.64395692e+00, 2.00000000e-01],
[8.00000000e-02, 0.00000000e+00, 9.97016760e+00, 2.00000000e-01]]), 'Sensor2':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.01062905e+01, 2.00000000e-01],
[8.00000000e-02, 0.00000000e+00, 1.03098588e+01, 2.00000000e-01]]), 'Sensor3':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.03938233e+01, 2.00000000e-01]], 'Sensor4':
→array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.51192090e+00, 2.00000000e-01]])}
[2021-07-07 14:49:28.044681] (MonitorAgent_SensorValues): Tproc: 0.001629
[2021-07-07 14:49:28.048806] (RedundancyAgent1): Tproc: 0.002818
[2021-07-07 14:49:28.076686] (Sensor3): Pack time: 0.000103
[2021-07-07 14:49:28.076910] (Sensor3): Sending: [array([[ 0.08      ,  0.
→10.53250935,  0.2      ]]), <time_series_metadata.scheme.MetaData object at
→0x7fecad4826d0>]
[2021-07-07 14:49:28.077554] (RedundancyAgent1): Received: {'from': 'Sensor3', 'data':
→ array([[ 0.08      ,  0.
→10.53250935,  0.2      ]]), 'metadata': <time_
→series_metadata.scheme.MetaData object at 0x7fecad46b3d0>, 'senderType':
→'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:28.080638] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
→00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.64395692e+00, 2.00000000e-01],
[8.00000000e-02, 0.00000000e+00, 9.97016760e+00, 2.00000000e-01]]), 'Sensor2':
→array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.01062905e+01, 2.00000000e-01],
[8.00000000e-02, 0.00000000e+00, 1.03098588e+01, 2.00000000e-01]]), 'Sensor3':
→array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.03938233e+01, 2.00000000e-01],
[8.00000000e-02, 0.00000000e+00, 1.05325093e+01, 2.00000000e-01]]), 'Sensor4':
→array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.51192090e+00, 2.00000000e-01]])}

```

(continues on next page)

(continued from previous page)

```

[2021-07-07 14:49:28.080717] (RedundancyAgent1): Tproc: 0.003086
[2021-07-07 14:49:28.077555] (MonitorAgent_SensorValues): Received: {'from': 'Sensor3'
→ ', 'data': array([[ 0.08      ,  0.      , 10.53250935,  0.2      ]]), 'metadata'
→ ': <time_series_metadata.scheme.MetaData object at 0x7fecad3f0070>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:28.080644] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
→ [4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
→ [5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
→ [6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01],
→ [7.00000000e-02, 0.00000000e+00, 9.64395692e+00, 2.00000000e-01],
→ [8.00000000e-02, 0.00000000e+00, 9.97016760e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cea90>, <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459b20>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce4c0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ceeb0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad459d00>]}, 'Sensor2': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→ 81226671e+00, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
→ [4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
→ [5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
→ [6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01],
→ [7.00000000e-02, 0.00000000e+00, 1.01062905e+01, 2.00000000e-01],
→ [8.00000000e-02, 0.00000000e+00, 1.03098588e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad459c70>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459af0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce670>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cecd0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3f0130>]}, 'Sensor3': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→ 40049983e+00, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
→ [4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
→ [5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
→ [6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01],
→ [7.00000000e-02, 0.00000000e+00, 1.03938233e+01, 2.00000000e-01],
→ [8.00000000e-02, 0.00000000e+00, 1.05325093e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced90>, <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459970>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce8e0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ceb80>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3f0070>]}, 'Sensor4': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→ 63403863e+00, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.51192090e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cedf0>, <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459bb0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cee50>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cefa0>]]}
[2021-07-07 14:49:28.080716] (MonitorAgent_SensorValues): Tproc: 0.00308
[2021-07-07 14:49:28.114989] (Sensor4): Pack time: 0.00015
[2021-07-07 14:49:28.115411] (Sensor4): Sending: [array([[0.08      , 0.          , 9.
→ 83409251, 0.2          ]]), <time_series_metadata.scheme.MetaData object at
→ 0x7fecad482700>]
[2021-07-07 14:49:28.116198] (RedundancyAgent1): Received: {'from': 'Sensor4', 'data':
→ array([[0.08      , 0.          , 9.83409251, 0.2          ]]), 'metadata': <time_
→ series_metadata.scheme.MetaData object at 0x7fecad46b3d0>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:28.116198] (MonitorAgent_SensorValues): Received: {'from': 'Sensor4
→ ', 'data': array([[0.08      , 0.          , 9.83409251, 0.2          ]]), 'metadata':
→ <time_series_metadata.scheme.MetaData object at 0x7fecad3f0040>, 'senderType':
→ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 14:49:28.119805] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
→ array([[0.00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
→ [4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
→ [5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
→ [6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01],
→ [7.00000000e-02, 0.00000000e+00, 9.64395692e+00, 2.00000000e-01],
→ [8.00000000e-02, 0.00000000e+00, 9.97016760e+00, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce6a0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3cea00>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ce8b0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3cea90>, <time_series_metadata.scheme.MetaData object at 0x7fecad44fe80>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459b20>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce4c0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ceeb0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad459d00>]], 'Sensor2': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→ 81226671e+00, 2.00000000e-01],
→ [1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
→ [2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
→ [3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
→ [4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
→ [5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
→ [6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01],
→ [7.00000000e-02, 0.00000000e+00, 1.01062905e+01, 2.00000000e-01],
→ [8.00000000e-02, 0.00000000e+00, 1.03098588e+01, 2.00000000e-01]]), 'metadata':
→ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce7f0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ceaf0>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3cebb0>, <time_series_metadata.scheme.MetaData object at
→ 0x7fecad3ced30>, <time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>,
→ <time_series_metadata.scheme.MetaData object at 0x7fecad459af0>, <time_series_
→ metadata.scheme.MetaData object at 0x7fecad3ce670>, <time_series_metadata.scheme.
→ MetaData object at 0x7fecad3ceeb0>]], 'Sensor3': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
→ 40049983e+00, 2.00000000e-01],

```


(continued from previous page)

```

[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.03938233e+01, 2.00000000e-01],
[8.00000000e-02, 0.00000000e+00, 1.05325093e+01, 2.00000000e-01]], 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3cea30>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce700>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec10>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3ced90>, <time_series_metadata.scheme.MetaData object at 0x7fecad459b80>,
↳ <time_series_metadata.scheme.MetaData object at 0x7fecad459970>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ce8e0>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3ceb80>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3f0070>]], 'Sensor4': {'data': array([[0.00000000e+00, 0.00000000e+00, 9.
↳ 63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.51192090e+00, 2.00000000e-01],
[8.00000000e-02, 0.00000000e+00, 9.83409251e+00, 2.00000000e-01]], 'metadata':
↳ [<time_series_metadata.scheme.MetaData object at 0x7fecad3ce730>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3ceb20>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cec70>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3cedf0>, <time_series_metadata.scheme.MetaData object at 0x7fecad459d60>,
↳ <time_series_metadata.scheme.MetaData object at 0x7fecad459bb0>, <time_series_
↳ metadata.scheme.MetaData object at 0x7fecad3cee50>, <time_series_metadata.scheme.
↳ MetaData object at 0x7fecad3cefa0>, <time_series_metadata.scheme.MetaData object at
↳ 0x7fecad3f0040>]]}
[2021-07-07 14:49:28.119751] (RedundancyAgent1): Buffer: {'Sensor1': array([[0.
↳ 00000000e+00, 0.00000000e+00, 1.00575868e+01, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.85659121e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.99946200e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00805776e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.66887351e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 9.71880656e+00, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.70455528e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.64395692e+00, 2.00000000e-01],
[8.00000000e-02, 0.00000000e+00, 9.97016760e+00, 2.00000000e-01]], 'Sensor2':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.81226671e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.62458464e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.85543299e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.00927391e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 9.87107856e+00, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00922106e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.01766134e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.01062905e+01, 2.00000000e-01],
[8.00000000e-02, 0.00000000e+00, 1.03098588e+01, 2.00000000e-01]], 'Sensor3':
↳ array([[0.00000000e+00, 0.00000000e+00, 9.40049983e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.33105188e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 9.72930289e+00, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.01384766e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.00575535e+01, 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[5.00000000e-02, 0.00000000e+00, 1.03679675e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 1.04846347e+01, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 1.03938233e+01, 2.00000000e-01],
[8.00000000e-02, 0.00000000e+00, 1.05325093e+01, 2.00000000e-01]], 'Sensor4':
→array([[0.00000000e+00, 0.00000000e+00, 9.63403863e+00, 2.00000000e-01],
[1.00000000e-02, 0.00000000e+00, 9.81544544e+00, 2.00000000e-01],
[2.00000000e-02, 0.00000000e+00, 1.03398175e+01, 2.00000000e-01],
[3.00000000e-02, 0.00000000e+00, 1.06398883e+01, 2.00000000e-01],
[4.00000000e-02, 0.00000000e+00, 1.02079757e+01, 2.00000000e-01],
[5.00000000e-02, 0.00000000e+00, 1.00425699e+01, 2.00000000e-01],
[6.00000000e-02, 0.00000000e+00, 9.75401840e+00, 2.00000000e-01],
[7.00000000e-02, 0.00000000e+00, 9.51192090e+00, 2.00000000e-01],
[8.00000000e-02, 0.00000000e+00, 9.83409251e+00, 2.00000000e-01]])}
[2021-07-07 14:49:28.120010] (MonitorAgent_SensorValues): Tproc: 0.003683
[2021-07-07 14:49:28.119848] (RedundancyAgent1): Tproc: 0.003522
Buffer size is 9 , which is less than 10 .
Not enough data for redundancy agent evaluation.
Buffer size is 9 , which is less than 10 .
Not enough data for redundancy agent evaluation.

```

17.2 Redundancy Agent – Determining redundancy in one single signal

In this tutorial we generate a single signal containing redundant, correlated information and supply it to the Redundancy Agent. The agent uses the redundancy in the data vector together with some prior knowledge in order to calculate the best consistent estimate with associated uncertainty, respecting all provided input uncertainties. It rejects sensor values that may be erroneous. In this presented use case the sensors do not directly measure the measurand, but the measurand is linked to the sensor values by means of four linear equations. The fact that there are four equations and not just one is the cause of the redundancy.

At the start of the main module we define all important parameters. For detailed descriptions of the parameters please refer to the [docstrings of the respective methods](#). Then we define the agents and start the network. The network and the calculated results can be monitored in a browser at the address <http://127.0.0.1:8050/>.

```

[2]: # %load redundancy_agent_one_signal.py
import numpy as np

from agentMET4FOF.agents.metrological_redundancy_agents import RedundancyAgent
from agentMET4FOF.agents.metrological_base_agents import (
    MetrologicalMonitorAgent,
)
from agentMET4FOF.agents.metrological_signal_agents import (
    MetrologicalGeneratorAgent,
)
from agentMET4FOF.network import AgentNetwork
from agentMET4FOF.streams.metrological_signal_streams import (
    MetrologicalMultiWaveGenerator,
)

def demonstrate_redundancy_agent_onesignal():
    batch_size = 10
    n_pr = batch_size

```

(continues on next page)

(continued from previous page)

```

sampling_frequency = 40
signal_1_frequency = 6
signal_2_frequency = 10
signal_1_initial_phase = 1
signal_2_initial_phase = 2
signal_1_amplitude = 230
signal_2_amplitude = 20
exp_unc_abs = 0.2 # absolute expanded uncertainty
probability_limit = 0.95

# start agent network server
agent_network = AgentNetwork(dashboard_modules=True)

# Initialize signal generating class outside of agent framework.
signal1 = MetrologicalMultiWaveGenerator(
    sfreq=sampling_frequency,
    freq_arr=np.array([signal_1_frequency, signal_2_frequency]),
    ampl_arr=np.array([signal_1_amplitude, signal_2_amplitude]),
    phase_ini_arr=np.array([signal_1_initial_phase, signal_2_initial_phase]),
    value_unc=exp_unc_abs,
)
# signal1.init_parameters(batch_size=batch_size)

# Data source agents.
source_name1 = "Sensor1" # signal1.metadata.metadata["device_id"]
source_agent1 = agent_network.add_agent(
    name=source_name1, agentType=MetrologicalGeneratorAgent
)
source_agent1.init_parameters(signal=signal1, batch_size=batch_size)

# Redundant data processing agent
sensor_key_list = [source_name1]
redundancy_name1 = "RedundancyAgent1" # Name cannot contain spaces!!
redundancy_agent1 = agent_network.add_agent(
    name=redundancy_name1, agentType=RedundancyAgent
)
redundancy_agent1.init_parameters(
    sensor_key_list=sensor_key_list,
    calc_type="lcsm",
    n_pr=n_pr,
    problem=probability_limit,
)
# prior knowledge needed for redundant evaluation of the data
redundancy_agent1.init_lcsm_parameters(
    fsam=sampling_frequency,
    f1=signal_1_frequency,
    f2=signal_2_frequency,
    ampl_ratio=signal_1_amplitude / signal_2_amplitude,
    phi1=signal_1_initial_phase,
    phi2=signal_2_initial_phase,
)

# Initialize metrologically enabled plotting agent.(
monitor_agent1 = agent_network.add_agent(
    name="MonitorAgent_SensorValues", agentType=MetrologicalMonitorAgent
)
monitor_agent2 = agent_network.add_agent(

```

(continues on next page)

(continued from previous page)

```

        name="MonitorAgent_RedundantEstimate", agentType=MetrologicalMonitorAgent
    )

    # Bind agents.
    source_agent1.bind_output(monitor_agent1)
    source_agent1.bind_output(redundancy_agent1)
    redundancy_agent1.bind_output(monitor_agent2)

    # Set all agents states to "Running".
    agent_network.set_running_state()

    # Allow for shutting down the network after execution.
    return agent_network

if __name__ == "__main__":
    demonstrate_redundancy_agent_onesignal()

```

```

Starting NameServer...
Broadcast server running on 0.0.0.0:9091
NS running on 127.0.0.1:3333 (127.0.0.1)
URI = PYRO:Pyro.NameServer@127.0.0.1:3333

```

```

-----
|
| Your agent network is starting up. Open your browser and
| visit the agentMET4FOF dashboard on http://127.0.0.1:8050/
|
|
-----

```

```

INFO [2021-07-07 15:01:10.413429] (Sensor1): INITIALIZED
INFO [2021-07-07 15:01:10.450809] (RedundancyAgent1): INITIALIZED
INFO [2021-07-07 15:01:10.484041] (MonitorAgent_SensorValues): INITIALIZED
INFO [2021-07-07 15:01:10.524346] (MonitorAgent_RedundantEstimate): INITIALIZED
[2021-07-07 15:01:10.546007] (Sensor1): Connected output module: MonitorAgent_
↳SensorValues
[2021-07-07 15:01:10.559178] (Sensor1): Connected output module: RedundancyAgent1
[2021-07-07 15:01:10.574231] (RedundancyAgent1): Connected output module:
↳MonitorAgent_RedundantEstimate

```

```

/home/ludwig10/code/agentMET4FOF/agentMET4FOF/metrological_streams.py:135:
↳UserWarning:

```

```

No uncertainty generator function specified. Setting to default (value_unc = constant,
↳ time_unc = 0).

```

```

SET STATE:    Running
[2021-07-07 15:01:11.424478] (Sensor1): Pack time: 0.001013
[2021-07-07 15:01:11.428880] (Sensor1): Sending: [array([[ 0.          ,  0.          ,
↳115.89771535,  0.2          ]]), <time_series_metadata.scheme.MetaData object at
↳0x7f4d32e7be50>]
[2021-07-07 15:01:11.440180] (RedundancyAgent1): Received: {'from': 'Sensor1', 'data':
↳ array([[ 0.          ,  0.          , 115.89771535,  0.2          ]]), 'metadata':
↳<time_series_metadata.scheme.MetaData object at 0x7f4d32e917c0>, 'senderType':
↳'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 15:01:11.451151] (RedundancyAgent1): Buffer: {'Sensor1': array([[ 0.
↳          ,  0.          , 115.89771535,  0.2          ]])}

```

(continues on next page)

(continued from previous page)

```

Buffer size is [2021-07-07 15:01:11.453337] (MonitorAgent_SensorValues): Received: {
  ↳ 'from': 'Sensor1', 'data': array([[ 0.          ,  0.          , 115.89771535,  0.2
  ↳ ]]), 'metadata': <time_series_metadata.scheme.MetaData object at
  ↳ 0x7f4d32e933d0>, 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 15:01:11.451664] (RedundancyAgent1): Tproc: 0.003382
1 [2021-07-07 15:01:11.456280] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
  ↳ array([[ 0.          ,  0.          , 115.89771535,  0.2
  ↳ ]]), 'metadata': [
  ↳ <time_series_metadata.scheme.MetaData object at 0x7f4d32e933d0>]}}
, which is less than [2021-07-07 15:01:11.456832] (MonitorAgent_SensorValues): Tproc:
  ↳ 0.002794
10 .
Not enough data for redundancy agent evaluation.
[2021-07-07 15:01:12.419936] (Sensor1): Pack time: 0.000606
[2021-07-07 15:01:12.422322] (Sensor1): Sending: [array([[ 2.50000000e-02,  0.
  ↳ 00000000e+00, -1.01535705e+02,
  ↳ 2.00000000e-01]]), <time_series_metadata.scheme.MetaData object at
  ↳ 0x7f4d32e7be50>]
[2021-07-07 15:01:12.423682] (RedundancyAgent1): Received: {'from': 'Sensor1', 'data':
  ↳ array([[ 2.50000000e-02,  0.00000000e+00, -1.01535705e+02,
  ↳ 2.00000000e-01]]), 'metadata': <time_series_metadata.scheme.MetaData object
  ↳ at 0x7f4d32e917c0>, 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default'
  ↳ }
[2021-07-07 15:01:12.423671] (MonitorAgent_SensorValues): Received: {'from': 'Sensor1'
  ↳ , 'data': array([[ 2.50000000e-02,  0.00000000e+00, -1.01535705e+02,
  ↳ 2.00000000e-01]]), 'metadata': <time_series_metadata.scheme.MetaData object
  ↳ at 0x7f4d32e93490>, 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default'
  ↳ }
Buffer size is [2021-07-07 15:01:12.428294] (MonitorAgent_SensorValues): Buffer: {
  ↳ 'Sensor1': {'data': array([[ 0.00000000e+00,  0.00000000e+00,  1.15897715e+02,
  ↳ 2.00000000e-01],
  ↳ [ 2.50000000e-02,  0.00000000e+00, -1.01535705e+02,
  ↳ 2.00000000e-01]]), 'metadata': [<time_series_metadata.scheme.MetaData object
  ↳ at 0x7f4d32e933d0>, <time_series_metadata.scheme.MetaData object at 0x7f4d32e93490>
  ↳ ]}}
[2021-07-07 15:01:12.426791] (RedundancyAgent1): Buffer: {'Sensor1': array([[ 0.
  ↳ 00000000e+00,  0.00000000e+00,  1.15897715e+02,
  ↳ 2.00000000e-01],
  ↳ [ 2.50000000e-02,  0.00000000e+00, -1.01535705e+02,
  ↳ 2.00000000e-01]])}
2 [2021-07-07 15:01:12.428951] (MonitorAgent_SensorValues): Tproc: 0.003767
, which is less than [2021-07-07 15:01:12.427470] (RedundancyAgent1): Tproc: 0.
  ↳ 003275
10 .
Not enough data for redundancy agent evaluation.
NS shut down.
[2021-07-07 15:01:13.420547] (Sensor1): Pack time: 0.000617
[2021-07-07 15:01:13.422979] (Sensor1): Sending: [array([[ 5.00000000e-02,  0.
  ↳ 00000000e+00, -2.14017298e+02,
  ↳ 2.00000000e-01]]), <time_series_metadata.scheme.MetaData object at
  ↳ 0x7f4d32e7be50>]
[2021-07-07 15:01:13.423901] (RedundancyAgent1): Received: {'from': 'Sensor1', 'data':
  ↳ array([[ 5.00000000e-02,  0.00000000e+00, -2.14017298e+02,
  ↳ 2.00000000e-01]]), 'metadata': <time_series_metadata.scheme.MetaData object
  ↳ at 0x7f4d32e722b0>, 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default'
  ↳ }
Buffer size is [2021-07-07 15:01:13.424103] (MonitorAgent_SensorValues): Received: {
  ↳ 'from': 'Sensor1', 'data': array([[ 5.00000000e-02,  0.00000000e+00, -2.
  ↳ 14017298e+02,

```

(continues on next page)

(continued from previous page)

```

    2.000000000e-01]]), 'metadata': <time_series_metadata.scheme.MetaData object
↳ at 0x7f4d32e72070>, 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default
↳ '}
[2021-07-07 15:01:13.427524] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data
↳ ': array([[ 0.00000000e+00,  0.00000000e+00,  1.15897715e+02,
    2.00000000e-01],
    [ 2.50000000e-02,  0.00000000e+00, -1.01535705e+02,
    2.00000000e-01],
    [ 5.00000000e-02,  0.00000000e+00, -2.14017298e+02,
    2.00000000e-01]])}, 'metadata': [<time_series_metadata.scheme.MetaData object
↳ at 0x7f4d32e933d0>, <time_series_metadata.scheme.MetaData object at 0x7f4d32e93490>,
↳ <time_series_metadata.scheme.MetaData object at 0x7f4d32e72070>]}}
3[2021-07-07 15:01:13.435063] (RedundancyAgent1): Buffer: {'Sensor1': array([[ 0.
↳ 00000000e+00,  0.00000000e+00,  1.15897715e+02,
    2.00000000e-01],
    [ 2.50000000e-02,  0.00000000e+00, -1.01535705e+02,
    2.00000000e-01],
    [ 5.00000000e-02,  0.00000000e+00, -2.14017298e+02,
    2.00000000e-01]])}
, which is less than [2021-07-07 15:01:13.427924] (MonitorAgent_SensorValues): Tproc:
↳ 0.003115
10. [2021-07-07 15:01:13.435851] (RedundancyAgent1): Tproc: 0.010717

```

Not enough data for redundancy agent evaluation.

```

[2021-07-07 15:01:14.419976] (Sensor1): Pack time: 0.000621
[2021-07-07 15:01:14.422191] (Sensor1): Sending: [array([[ 7.50000000e-02,  0.
↳ 00000000e+00, -1.59767167e+02,
    2.00000000e-01]]), <time_series_metadata.scheme.MetaData object at
↳ 0x7f4d32e7be50>]
[2021-07-07 15:01:14.423266] (RedundancyAgent1): Received: {'from': 'Sensor1', 'data':
↳ array([[ 7.50000000e-02,  0.00000000e+00, -1.59767167e+02,
    2.00000000e-01]]), 'metadata': <time_series_metadata.scheme.MetaData object
↳ at 0x7f4d32e722b0>, 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default
↳ '}
[2021-07-07 15:01:14.423510] (MonitorAgent_SensorValues): Received: {'from': 'Sensor1
↳ ', 'data': array([[ 7.50000000e-02,  0.00000000e+00, -1.59767167e+02,
    2.00000000e-01]]), 'metadata': <time_series_metadata.scheme.MetaData object
↳ at 0x7f4d32e72580>, 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default
↳ '}
[2021-07-07 15:01:14.431719] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
↳ array([[ 0.00000000e+00,  0.00000000e+00,  1.15897715e+02,
    2.00000000e-01],
    [ 2.50000000e-02,  0.00000000e+00, -1.01535705e+02,
    2.00000000e-01],
    [ 5.00000000e-02,  0.00000000e+00, -2.14017298e+02,
    2.00000000e-01],
    [ 7.50000000e-02,  0.00000000e+00, -1.59767167e+02,
    2.00000000e-01]]), 'metadata': [<time_series_metadata.scheme.MetaData object
↳ at 0x7f4d32e933d0>, <time_series_metadata.scheme.MetaData object at 0x7f4d32e93490>,
↳ <time_series_metadata.scheme.MetaData object at 0x7f4d32e72070>, <time_series_
↳ metadata.scheme.MetaData object at 0x7f4d32e72580>]}}
Buffer size is [2021-07-07 15:01:14.427207] (RedundancyAgent1): Buffer: {'Sensor1':
↳ array([[ 0.00000000e+00,  0.00000000e+00,  1.15897715e+02,
    2.00000000e-01],
    [ 2.50000000e-02,  0.00000000e+00, -1.01535705e+02,
    2.00000000e-01],
    [ 5.00000000e-02,  0.00000000e+00, -2.14017298e+02,

```

(continues on next page)

(continued from previous page)

```

        2.00000000e-01],
        [ 7.50000000e-02,  0.00000000e+00, -1.59767167e+02,
          2.00000000e-01]])}
[2021-07-07 15:01:14.432797] (MonitorAgent_SensorValues): Tproc: 0.008584
4 [2021-07-07 15:01:14.428017] (RedundancyAgent1): Tproc: 0.003956
, which is less than 10 .
Not enough data for redundancy agent evaluation.
[2021-07-07 15:01:15.419689] (Sensor1): Pack time: 0.000506
[2021-07-07 15:01:15.421859] (Sensor1): Sending: [array([[0.1          , 0.          , 4.
↪ 97982699, 0.2          ]]), <time_series_metadata.scheme.MetaData object at 0x7f4d32e7be50>]
[2021-07-07 15:01:15.423037] (MonitorAgent_SensorValues): Received: {'from': 'Sensor1
↪ ', 'data': array([[0.1          , 0.          , 4.97982699, 0.2          ]]), 'metadata':
↪ <time_series_metadata.scheme.MetaData object at 0x7f4d32e7a5b0>, 'senderType':
↪ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 15:01:15.423106] (RedundancyAgent1): Received: {'from': 'Sensor1', 'data':
↪ array([[0.1          , 0.          , 4.97982699, 0.2          ]]), 'metadata': <time_
↪ series_metadata.scheme.MetaData object at 0x7f4d32e722b0>, 'senderType':
↪ 'MetrologicalGeneratorAgent', 'channel': 'default'}
Buffer size is [2021-07-07 15:01:15.428496] (RedundancyAgent1): Buffer: {'Sensor1':
↪ array([[ 0.00000000e+00,  0.00000000e+00,  1.15897715e+02,
          2.00000000e-01],
          [ 2.50000000e-02,  0.00000000e+00, -1.01535705e+02,
          2.00000000e-01],
          [ 5.00000000e-02,  0.00000000e+00, -2.14017298e+02,
          2.00000000e-01],
          [ 7.50000000e-02,  0.00000000e+00, -1.59767167e+02,
          2.00000000e-01],
          [ 1.00000000e-01,  0.00000000e+00,  4.97982699e+00,
          2.00000000e-01]])}
5[2021-07-07 15:01:15.429141] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data
↪ ': array([[ 0.00000000e+00,  0.00000000e+00,  1.15897715e+02,
          2.00000000e-01],
          [ 2.50000000e-02,  0.00000000e+00, -1.01535705e+02,
          2.00000000e-01],
          [ 5.00000000e-02,  0.00000000e+00, -2.14017298e+02,
          2.00000000e-01],
          [ 7.50000000e-02,  0.00000000e+00, -1.59767167e+02,
          2.00000000e-01],
          [ 1.00000000e-01,  0.00000000e+00,  4.97982699e+00,
          2.00000000e-01]])}, 'metadata': [<time_series_metadata.scheme.MetaData object
↪ at 0x7f4d32e933d0>, <time_series_metadata.scheme.MetaData object at 0x7f4d32e93490>,
↪ <time_series_metadata.scheme.MetaData object at 0x7f4d32e72070>, <time_series_
↪ metadata.scheme.MetaData object at 0x7f4d32e72580>, <time_series_metadata.scheme.
↪ MetaData object at 0x7f4d32e7a5b0>]}}
, which is less than [2021-07-07 15:01:15.429139] (RedundancyAgent1): Tproc: 0.
↪ 005354
10 .
[2021-07-07 15:01:15.430533] (MonitorAgent_SensorValues): Tproc: 0.006765
Not enough data for redundancy agent evaluation.
[2021-07-07 15:01:16.421513] (MonitorAgent_SensorValues): Received: {'from': 'Sensor1
↪ ', 'data': array([[1.25000000e-01, 0.00000000e+00, 1.7541884e+02, 2.00000000e-01]]),
↪ 'metadata': <time_series_metadata.scheme.MetaData object at 0x7f4d32e7a5e0>,
↪ 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 15:01:16.423369] (MonitorAgent_SensorValues): Buffer: {'Sensor1': {'data':
↪ array([[ 0.00000000e+00,  0.00000000e+00,  1.15897715e+02,
          2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

[ 2.50000000e-02, 0.00000000e+00, -1.01535705e+02,
 2.00000000e-01],
[ 5.00000000e-02, 0.00000000e+00, -2.14017298e+02,
 2.00000000e-01],
[ 7.50000000e-02, 0.00000000e+00, -1.59767167e+02,
 2.00000000e-01],
[ 1.00000000e-01, 0.00000000e+00, 4.97982699e+00,
 2.00000000e-01],
[ 1.25000000e-01, 0.00000000e+00, 1.75418840e+02,
 2.00000000e-01]], 'metadata': [<time_series_metadata.scheme.Metadata object
↪ at 0x7f4d32e933d0>, <time_series_metadata.scheme.Metadata object at 0x7f4d32e93490>,
↪ <time_series_metadata.scheme.Metadata object at 0x7f4d32e72070>, <time_series_
↪ metadata.scheme.Metadata object at 0x7f4d32e72580>, <time_series_metadata.scheme.
↪ Metadata object at 0x7f4d32e7a5b0>, <time_series_metadata.scheme.Metadata object at
↪ 0x7f4d32e7a5e0>]]}
[2021-07-07 15:01:16.422533] (RedundancyAgent1): Received: {'from': 'Sensor1', 'data':
↪ array([[1.2500000e-01, 0.0000000e+00, 1.7541884e+02, 2.0000000e-01]]), 'metadata':
↪ <time_series_metadata.scheme.Metadata object at 0x7f4d32e722b0>, 'senderType':
↪ 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 15:01:16.419512] (Sensor1): Pack time: 0.000535
[2021-07-07 15:01:16.423744] (MonitorAgent_SensorValues): Tproc: 0.002008
[2021-07-07 15:01:16.428532] (RedundancyAgent1): Buffer: {'Sensor1': array([[ 0.
↪ 00000000e+00, 0.00000000e+00, 1.15897715e+02,
 2.00000000e-01],
[ 2.50000000e-02, 0.00000000e+00, -1.01535705e+02,
 2.00000000e-01],
[ 5.00000000e-02, 0.00000000e+00, -2.14017298e+02,
 2.00000000e-01],
[ 7.50000000e-02, 0.00000000e+00, -1.59767167e+02,
 2.00000000e-01],
[ 1.00000000e-01, 0.00000000e+00, 4.97982699e+00,
 2.00000000e-01],
[ 1.25000000e-01, 0.00000000e+00, 1.75418840e+02,
 2.00000000e-01]])}
[2021-07-07 15:01:16.425628] (Sensor1): Sending: [array([[1.2500000e-01, 0.
↪ 00000000e+00, 1.7541884e+02, 2.0000000e-01]]), <time_series_metadata.scheme.Metadata
↪ object at 0x7f4d32e7be50>]
[2021-07-07 15:01:16.428746] (RedundancyAgent1): Tproc: 0.00601
Buffer size is 6 , which is less than 10 .
Not enough data for redundancy agent evaluation.
[2021-07-07 15:01:17.440260] (RedundancyAgent1): Received: {'from': 'Sensor1', 'data':
↪ array([[1.5000000e-01, 0.0000000e+00, 2.2239348e+02, 2.0000000e-01]]), 'metadata':
↪ <time_series_metadata.scheme.Metadata object at 0x7f4d32e722b0>, 'senderType':
↪ 'MetrologicalGeneratorAgent', 'channel': 'default'}
Buffer size is [2021-07-07 15:01:17.450576] (RedundancyAgent1): Buffer: {'Sensor1':
↪ array([[ 0.00000000e+00, 0.00000000e+00, 1.15897715e+02,
 2.00000000e-01],
[ 2.50000000e-02, 0.00000000e+00, -1.01535705e+02,
 2.00000000e-01],
[ 5.00000000e-02, 0.00000000e+00, -2.14017298e+02,
 2.00000000e-01],
[ 7.50000000e-02, 0.00000000e+00, -1.59767167e+02,
 2.00000000e-01],
[ 1.00000000e-01, 0.00000000e+00, 4.97982699e+00,
 2.00000000e-01],
[ 1.25000000e-01, 0.00000000e+00, 1.75418840e+02,
 2.00000000e-01],

```

(continues on next page)

(continued from previous page)

```

    [ 1.50000000e-01, 0.00000000e+00, 2.22393480e+02,
      2.00000000e-01]])}
[2021-07-07 15:01:17.446961] (Sensor1): Pack time: 0.02075
[2021-07-07 15:01:17.453076] (MonitorAgent_SensorValues): Received: {'from': 'Sensor1
↪', 'data': array([[1.50000000e-01, 0.00000000e+00, 2.2239348e+02, 2.00000000e-01]]),
↪ 'metadata': <time_series_metadata.scheme.MetaData object at 0x7f4d32e7a880>,
↪ 'senderType': 'MetrologicalGeneratorAgent', 'channel': 'default'}
[2021-07-07 15:01:17.463997] (RedundancyAgent1): Tproc: 0.016613
7 [2021-07-07 15:01:17.463909] (Sensor1): Sending: [array([[1.50000000e-01, 0.
↪ 00000000e+00, 2.2239348e+02, 2.00000000e-01]]), <time_series_metadata.scheme.MetaData_
↪ object at 0x7f4d32e7be50>]
, which is less than [2021-07-07 15:01:17.463269] (MonitorAgent_SensorValues):
↪ Buffer: {'Sensor1': {'data': array([[ 0.00000000e+00, 0.00000000e+00, 1.
↪ 15897715e+02,
      2.00000000e-01],
    [ 2.50000000e-02, 0.00000000e+00, -1.01535705e+02,
      2.00000000e-01],
    [ 5.00000000e-02, 0.00000000e+00, -2.14017298e+02,
      2.00000000e-01],
    [ 7.50000000e-02, 0.00000000e+00, -1.59767167e+02,
      2.00000000e-01],
    [ 1.00000000e-01, 0.00000000e+00, 4.97982699e+00,
      2.00000000e-01],
    [ 1.25000000e-01, 0.00000000e+00, 1.75418840e+02,
      2.00000000e-01],
    [ 1.50000000e-01, 0.00000000e+00, 2.22393480e+02,
      2.00000000e-01]])}, 'metadata': [<time_series_metadata.scheme.MetaData object
↪ at 0x7f4d32e933d0>, <time_series_metadata.scheme.MetaData object at 0x7f4d32e93490>,
↪ <time_series_metadata.scheme.MetaData object at 0x7f4d32e72070>, <time_series_
↪ metadata.scheme.MetaData object at 0x7f4d32e72580>, <time_series_metadata.scheme.
↪ MetaData object at 0x7f4d32e7a5b0>, <time_series_metadata.scheme.MetaData object at
↪ 0x7f4d32e7a5e0>, <time_series_metadata.scheme.MetaData object at 0x7f4d32e7a880>]]}
10 [2021-07-07 15:01:17.463567] (MonitorAgent_SensorValues): Tproc: 0.010296
.
Not enough data for redundancy agent evaluation.

```


18.1 Base agents

```
class agentMET4FOF.agents.base_agents.AgentMET4FOF (name="", host=None, se-  
rializer=None, trans-  
port=None, attributes=None,  
backend='osbrain',  
mesa_model=None)
```

Base class for all agents with specific functions to be overridden/supplied by user.

Behavioral functions for users to provide are `init_parameters`, `agent_loop` and `on_received_message`. Communicative functions are `bind_output`, `unbind_output` and `send_output`.

`_bind_output` (*output_agent*, *channel='default'*)

Internal method which implements the logic for connecting this agent, to the *output_agent*.

`_convert_matplotlib_fig` (*fig: matplotlib.figure.Figure*, *mode: str = 'image'*)

Convert matplotlib figure to be rendered by the dashboard

`_convert_to_plotly` (*matplotlib_fig: matplotlib.figure.Figure*)

Internal method to convert matplotlib figure to plotly figure

Parameters **`matplotlib_fig`** (*plt.Figure*) – Matplotlib figure to be converted

`_fig_to_uri` (*matplotlib_fig: matplotlib.figure.Figure*)

Internal method to convert matplotlib figure to base64 uri image for display

Parameters **`matplotlib_fig`** (*plt.Figure*) – Matplotlib figure to be converted

`_get_metadata` (*data*)

Internal helper function for getting the data type & dimensions of data. This is for update_output_channels_info()

`_is_type_message` (*data*)

Internal method to check if the data carries signature of an agent message type

Parameters **`data`** – Data to be checked for type

Returns result**Return type** boolean**`_remove_methods (cls)`**

Remove methods from the other backends base class from the current agent

`_update_output_channels_info (data, channel)`

Internal method to update the dict of `output_channels_info`. This is used in conjunction with `send_output()`.

Checks and records data type & dimension and channel name. If the data is nested within dict, then it will search deeper and subsequently record the info of each inner hierarchy

Parameters

- **data** – data to be checked for type & dimension
- **channel** (*str*) – name of channel to be recorded

`agent_loop ()`

User defined method for the agent to execute for *loop_wait* seconds specified either in *self.loop_wait* or explicitly via *init_agent_loop(loop_wait)*

To start a new loop, call *init_agent_loop(loop_wait)* on the agent. Example of usage is to check the *current_state* of the agent and send data periodically.

`bind_output (output_agent, channel='default')`

Forms Output connection with another agent

Any call on `send_output` will reach this newly binded agent. Adds the agent to its list of Outputs.

Parameters

- **output_agent** (*AgentMET4FOF* or *list*) – Agent(s) to be binded to this agent's output channel
- **channel** (*str* or *list of str*) – Specific name of the channel(s) to be subscribed to. (Default = "data")

`buffer_clear (agent_name: Optional[str] = None)`

Empties buffer which is a dict indexed by the *agent_name*.

Parameters **agent_name** (*str*, *optional*) – Key of the memory dict, which can be the name of input agent, or *self.name*. If not supplied (default), we assume to clear the entire memory.

`buffer_filled (agent_name=None)`

Checks whether the internal buffer has been filled to the maximum allowed specified by *self.buffer_size*

Parameters **agent_name** (*str*) – Index of the buffer which is the name of input agent.

Returns status of buffer filled**Return type** boolean**`buffer_store (agent_from: str, data=None, concat_axis=0)`**

Updates data stored in *self.buffer* with the received message

Checks if sender agent has sent any message before. If it did, then append, otherwise create new entry for it

Parameters

- **agent_from** (*str*) – Name of agent sender
- **data** – Any supported data which can be stored in dict as buffer. See *AgentBuffer* for more information.

get_attr (*attr*)

Return the specified attribute of the agent.

Parameters **name** – Name of the attribute to be retrieved.

handle_process_data (*message*)

Internal method to handle incoming message before calling `on_received_message`

If `current_state` is either `Stop` or `Reset`, it will terminate early before entering `on_received_message`.

init_agent (*buffer_size=1000, log_mode=True*)

Internal initialization to setup the agent: mainly on setting the dictionary of Inputs, Outputs, PubAddr. Calls user-defined `init_parameters()` upon finishing.

Inputs

Dictionary of Agents connected to its input channels. Messages will arrive from agents in this dictionary. Automatically updated when `bind_output()` function is called

Type `dict`

Outputs

Dictionary of Agents connected to its output channels. Messages will be sent to agents in this dictionary. Automatically updated when `bind_output()` function is called

Type `dict`

PubAddr_alias

Name of Publish address socket

Type `str`

PubAddr

Publish address socket handle

Type `str`

AgentType

Name of class

Type `str`

current_state

Current state of agent. Can be used to define different states of operation such as “Running”, “Idle”, “Stop”, etc.. Users will need to define their own flow of handling each type of `self.current_state` in the `agent_loop`

Type `str`

loop_wait

The interval to wait between loop. Call `init_agent_loop` to restart the timer or set the value of `loop_wait` in `init_parameters` when necessary.

Type `int`

buffer_size

The total number of elements to be stored in the agent `buffer`. When total elements exceeds this number, the latest elements will be replaced with the incoming data elements

Type `int`

init_agent_loop (*loop_wait: Optional[int] = None*)

Initiates the agent loop, which iterates every `loop_wait` seconds

Stops every timers and initiate a new loop.

Parameters **loop_wait** (*int, optional*) – The wait between each iteration of the loop

init_buffer (*buffer_size*)

A method to initialise the buffer. By overriding this method, user can provide a custom buffer, instead

of the regular AgentBuffer. This can be used, for example, to provide a MetrologicalAgentBuffer in the metrological agents.

init_parameters ()

User provided function to initialize parameters of choice.

log_info (*message*)

Prints logs to be saved into logfile with Logger Agent

Parameters *message* (*str*) – Message to be logged to the internal Logger Agent

on_connect_output (*output_agent*)

This method is called whenever an agent is connected to its output

This can be for example, to send *metadata* or *ping* to the output agent.

on_received_message (*message*)

User-defined method and is triggered to handle the message passed by Input.

Parameters *message* (*Dictionary*) – The message received is in form
{‘from’:agent_name, ‘data’: data, ‘senderType’: agent_class, ‘channel’:channel_name}.
agent_name is the name of the Input agent which sent the message data is the actual content of the message.

pack_data (*data*, *channel*=‘default’)

Internal method to pack the data content into a dictionary before sending out.

Special case : if the *data* is already a *message*, then the *from* and *senderType* will be altered to this agent, without altering the *data* and *channel* within the message this is used for more succinct data processing and passing.

Parameters

- **data** (*argument*) – Data content to be packed before sending out to agents.
- **channel** (*str*) – Key of dictionary which stores data

Returns

- **Packed message data** (*dict of the form* {‘from’:agent_name, ‘data’: data,})
- **‘senderType’** (*agent_class*, ‘channel’:channel_name{.})

reset ()

This method will be called on all agents when the global *reset_agents* is called by the AgentNetwork and when the Reset button is clicked on the dashboard.

Method to reset the agent’s states and parameters. User can override this method to reset the specific parameters.

respond_reply_attr (*message_data*)

Response to a *reply* of setting attribute

respond_request_attr (*attribute*: *str*)

Response to a *request* of *attribute* from input agents.

This agent reply with the requested *attribute* if it has it.

respond_request_method (*message_data*: *dict*)

Response to a *request* of executing *method* from input agents.

This agent will execute the method with the provided parameters of the method.

send_output (*data*, *channel*=‘default’)

Sends message data to all connected agents in self.Outputs.

Output connection can first be formed by calling `bind_output`. By default calls `pack_data(data)` before sending out. Can specify specific channel as opposed to 'default' channel.

Parameters

- **data** (*argument*) – Data content to be sent out
- **channel** (*str*) – Key of *message* dictionary which stores data

Returns message – {'from':agent_name, 'data': data, 'senderType': agent_class, 'channel':channel_name}.

Return type `dict`

send_plot (*fig: Union[matplotlib.figure.Figure, Dict[str, matplotlib.figure.Figure]], mode: str = 'image'*)

Sends plot to agents connected to this agent's Output channel.

This method is different from `send_output` which will be sent to through the 'plot' channel to be handled.

Tradeoffs between "image" and "plotly" modes are that "image" are more stable and "plotly" are interactive. Note not all (complicated) matplotlib figures can be converted into a plotly figure.

Parameters

- **fig** (*matplotlib.figure.Figure or dict of matplotlib.figure.Figure*) – Alternatively, multiple figures can be nested in a dict (with any preferred keys) e.g {"Temperature":matplotlib.Figure, "Acceleration":matplotlib.Figure}
- **mode** (*str*) – "image" - converts into image via encoding at base64 string. "plotly" - converts into plotly figure using *mpl_to_plotly* Default: "image"

Returns graph

Return type `str` or plotly figure or dict of one of those converted figure(s)

send_request_attribute (*attribute: str*)

Send a *request* of *attribute* to output agents.

Output agents will reply with the requested *attribute* if they have.

send_request_method (*method: str, **method_params*)

Send a *request* of executing methods to output agents.

Output agents will respond by calling the method.

send_set_attr (*attr: str, value*)

Sends a message to set the *attr* of another agent to that of *value*.

Parameters

- **attr** (*str*) – The variable name of the output agent to be set.
- **value** – The value of the variable to be set

set_attr (***kwargs*)

Set object attributes.

Parameters kwargs (*[name, value]*) – Keyword arguments will be used to set the object attributes.

shutdown ()

Cleanly stop and shut down the agent assuming the agent is running.

Will let the main thread do the tear down.

step()

Used for MESA backend only. Behaviour on every update step.

stop_agent_loop()

Stops agent_loop from running

Note that the agent will still be responding to messages.

unbind_output(output_agent)

Remove existing output connection with another agent

This reverses the bind_output method.

Parameters output_agent (AgentMET4FOF) – Agent binded to this agent’s output channel

```
class agentMET4FOF.agents.base_agents.DataStreamAgent (name="", host=None,
                                                         serializer=None, trans-
                                                         port=None, attributes=None,
                                                         backend='osbrain',
                                                         mesa_model=None)
```

Able to simulate generation of datastream by loading a given DataStreamMET4FOF

Can be used in incremental training or batch training mode. To simulate batch training mode, set *pretrain_size=-1*, otherwise, set *pretrain_size* and *batch_size* for the respective. See *DataStreamMET4FOF* on loading your own data set as a data stream.

agent_loop()

User defined method for the agent to execute for *loop_wait* seconds specified either in *self.loop_wait* or explicitly via *init_agent_loop(loop_wait)*

To start a new loop, call *init_agent_loop(loop_wait)* on the agent. Example of usage is to check the *current_state* of the agent and send data periodically.

init_parameters (*stream=<agentMET4FOF.streams.base_streams.DataStreamMET4FOF object>*,
pretrain_size=None, batch_size=1, loop_wait=1, randomize=False)

Parameters

- **stream** (*DataStreamMET4FOF*) – A DataStreamMET4FOF object which provides the sample data
- **pretrain_size** (*int*) – The number of sample data to send through in the first loop cycle, and subsequently, the *batch_size* will be used
- **batch_size** (*int*) – The number of sample data to send in every loop cycle
- **loop_wait** (*int*) – The duration to wait (seconds) at the end of each loop cycle before going into the next cycle
- **randomize** (*bool*) – Determines if the dataset should be shuffled before streaming

reset()

This method will be called on all agents when the global *reset_agents* is called by the AgentNetwork and when the Reset button is clicked on the dashboard.

Method to reset the agent’s states and parameters. User can override this method to reset the specific parameters.

```
class agentMET4FOF.agents.base_agents.MonitorAgent (name="", host=None, se-
                                                         rializer=None, trans-
                                                         port=None, attributes=None,
                                                         backend='osbrain',
                                                         mesa_model=None)
```

Unique Agent for storing plots and data from messages received from input agents.

The dashboard searches for Monitor Agents' *buffer* and *plots* to draw the graphs "plot" channel is used to receive base64 images from agents to plot on dashboard

plots

Dictionary of format *{agent1_name : agent1_plot, agent2_name : agent2_plot}*

Type dict

plot_filter

List of keys to filter the 'data' upon receiving message to be saved into memory Used to specifically select only a few keys to be plotted

Type list of str

custom_plot_function

a custom plot function that can be provided to handle the data in the monitor agents buffer (see *AgentMET4FOF* for details). The function gets provided with the content (value) of the buffer and with the string of the sender agent's name as stored in the buffer's keys. Additionally any other parameters can be provided as a dict in *custom_plot_parameters*.

Type callable

custom_plot_parameters

a custom dictionary of parameters that shall be provided to each call of the *custom_plot_function*

Type dict

init_parameters (*plot_filter: Optional[List[str]] = None, custom_plot_function: Optional[Callable[[...], plotly.graph_objs._scatter.Scatter]] = None, **kwargs*)

Initialize the monitor agent's parameters

Parameters

- **plot_filter** (*list of str, optional*) – List of keys to filter the 'data' upon receiving message to be saved into memory. Used to specifically select only a few keys to be plotted
- **custom_plot_function** (*callable, optional*) – a custom plot function that can be provided to handle the data in the monitor agents buffer (see *AgentMET4FOF* for details). The function gets provided with the content (value) of the buffer and with the string of the sender agent's name as stored in the buffer's keys. Additionally any other parameters can be provided as a dict in *custom_plot_parameters*. By default the data gets plotted as shown in the various tutorials.
- **kwargs** (*Any*) – custom key word parameters that shall be provided to each call of the *custom_plot_function*

on_received_message (*message*)

Handles incoming data from 'default' and 'plot' channels.

Stores 'default' data into *buffer* and 'plot' data into *plots*

Parameters **message** (*dict*) – Acceptable channel values are 'default' or 'plot'

reset ()

This method will be called on all agents when the global *reset_agents* is called by the AgentNetwork and when the Reset button is clicked on the dashboard.

Method to reset the agent's states and parameters. User can override this method to reset the specific parameters.

update_plot_memory (*message: Dict[str, Any]*)

Updates plot figures stored in *self.plots* with the received message

Parameters **message** (*dict*) – Standard message format specified by AgentMET4FOF class
Message['data'] needs to be base64 image string and can be nested in dictionary for multiple plots. Only the latest plot will be shown kept and does not keep a history of the plots.

18.2 Signal agents

```
class agentMET4FOF.agents.signal_agents.SineGeneratorAgent (name="", host=None,  
serializer=None,  
transport=None,  
attributes=None,  
backend='osbrain',  
mesa_model=None)
```

An agent streaming a sine signal

Takes samples from the `SineGenerator` and pushes them sample by sample to connected agents via its output channel.

agent_loop ()

Model the agent's behaviour

On state *Running* the agent will extract sample by sample the input data streams content and push it via invoking `AgentMET4FOF.send_output()`.

init_parameters (*sfreq=500, sine_freq=5, amplitude=1, initial_phase=0*)

Initialize the input data

Initialize the input data stream as an instance of the `SineGenerator` class.

Parameters

- **sfreq** (*int*) – sampling frequency for the underlying signal
- **sine_freq** (*float*) – frequency of the generated sine wave
- **amplitude** (*float*) – amplitude of the generated sine wave
- **initial_phase** (*float*) – initial phase (at t=0) of the generated sine wave

18.3 Metrologically enabled base agents

```
class agentMET4FOF.agents.metrological_base_agents.MetrologicalAgent (name="",  
host=None,  
serial-  
izer=None,  
trans-  
port=None,  
at-  
tributes=None,  
back-  
end='osbrain',  
mesa_model=None)
```

_input_data = **None**

Input dictionary of all incoming data including metadata:


```
dict like {
    <from>: {
        "buffer": TimeSeriesBuffer(maxlen=buffer_size),
        "metadata": MetaData(**kwargs).metadata,
    }
}
```

`_output_data = None`

Output dictionary of all outgoing data including metadata:

```
dict like {
    <from>: {
        "buffer": TimeSeriesBuffer(maxlen=buffer_size),
        "metadata": MetaData(**kwargs).metadata,
    }
}
```

`agent_loop()`

User defined method for the agent to execute for *loop_wait* seconds specified either in *self.loop_wait* or explicitly via *init_agent_loop(loop_wait)*

To start a new loop, call *init_agent_loop(loop_wait)* on the agent. Example of usage is to check the *current_state* of the agent and send data periodically.

`init_parameters(input_data_maxlen=25, output_data_maxlen=25)`

User provided function to initialize parameters of choice.

`on_received_message(message)`

User-defined method and is triggered to handle the message passed by Input.

Parameters *message* (*Dictionary*) – The message received is in form {‘from’:agent_name, ‘data’: data, ‘senderType’: agent_class, ‘channel’:channel_name}. agent_name is the name of the Input agent which sent the message data is the actual content of the message.

`pack_data(data, channel='default')`

Internal method to pack the data content into a dictionary before sending out.

Special case : if the *data* is already a *message*, then the *from* and *senderType* will be altered to this agent, without altering the *data* and *channel* within the message this is used for more succinct data processing and passing.

Parameters

- **data** (*argument*) – Data content to be packed before sending out to agents.
- **channel** (*str*) – Key of dictionary which stores data

Returns

- **Packed message data** (*dict of the form* {‘from’:agent_name, ‘data’: data,})
- **‘senderType’** (*agent_class, ‘channel’:channel_name*.)

```
class agentMET4FOF.agents.metrological_base_agents.MetrologicalMonitorAgent (name="",  
                                                                           host=None,  
                                                                           se-  
                                                                           ri-  
                                                                           al-  
                                                                           izer=None,  
                                                                           trans-  
                                                                           port=None,  
                                                                           at-  
                                                                           tributes=None,  
                                                                           back-  
                                                                           end='osbrain',  
                                                                           mesa_model=None)
```

init_parameters (*args, **kwargs)
User provided function to initialize parameters of choice.

on_received_message (message)
Handles incoming data from 'default' and 'plot' channels.
Stores 'default' data into *self.memory* and 'plot' data into *self.plots*
Parameters message (*dict*) – Acceptable channel values are 'default' or 'plot'

reset ()
This method will be called on all agents when the global *reset_agents* is called by the AgentNetwork and when the Reset button is clicked on the dashboard.
Method to reset the agent's states and parameters. User can override this method to reset the specific parameters.

update_plot_memory (message)
Updates plot figures stored in *self.plots* with the received message
Parameters message (*dict*) – Standard message format specified by AgentMET4FOF class
Message['data'] needs to be base64 image string and can be nested in dictionary for multiple plots Only the latest plot will be shown kept and does not keep a history of the plots.

18.4 Metrologically enabled signal agents

```
class agentMET4FOF.agents.metrological_signal_agents.MetrologicalGeneratorAgent (name="",  
                                                                           host=None,  
                                                                           se-  
                                                                           ri-  
                                                                           al-  
                                                                           izer=None,  
                                                                           trans-  
                                                                           port=None,  
                                                                           at-  
                                                                           tributes=None,  
                                                                           back-  
                                                                           end='osbrain',  
                                                                           mesa_model=N
```

An agent streaming a specified signal

Takes samples from an instance of *MetrologicalDataStreamMET4FOF* with sampling frequency *sfreq*

and signal frequency `sine_freq` and pushes them sample by sample to connected agents via its output channel.

agent_loop()

Model the agent's behaviour

On state *Running* the agent will extract sample by sample the input datastream's content and push it into its output buffer.

init_parameters (*signal*: `agentMET4FOF.streams.metrological_base_streams.MetrologicalDataStreamMET4FOF`
= `<agentMET4FOF.streams.metrological_signal_streams.MetrologicalSineGenerator`
`object>`, ***kwargs*)

Initialize the input data stream

Parameters **signal** (`MetrologicalDataStreamMET4FOF`) – the underlying signal for the generator (defaults to `MetrologicalSineGenerator`)

19.1 Base streams

class agentMET4FOF.streams.base_streams.DataStreamMET4FOF

Abstract class for creating datastreams

Data can be fetched sequentially using `next_sample()` or all at once `all_samples()`. This increments the internal sample index `_sample_idx`.

For sensors data, we assume:

- The format shape for 2D data stream (timesteps, n_sensors)
- The format shape for 3D data stream (num_cycles, timesteps, n_sensors)

To create a new DataStreamMET4FOF class, inherit this class and call `set_metadata()` in the constructor. Choose one of two types of datastreams to be created:

- from dataset file (`set_data_source()`), or
- a waveform generator function (`set_generator_function()`).

Alternatively, override the `next_sample()` function if neither option suits the application. For generator functions, `sfreq` is a required variable to be set on `init` which sets the sampling frequency and the time-step which occurs when `next_sample()` is called.

For an example implementation of using generator function, see the built-in `SineGenerator` class. See tutorials for more implementations.

`_quantities`

Measured quantities such as sensors readings

Type Union[List, DataFrame, np.ndarray]

`_target`

Target label in the context of machine learning. This can be Remaining Useful Life in predictive maintenance application. Note this can be an unobservable variable in real-time and applies only for validation during offline analysis.

Type Union[List, DataFrame, np.ndarray]

`_time`

dtype can be either float or datetime64 to indicate the time when the `_quantities` were measured.

Type Union[List, DataFrame, np.ndarray]

`_current_sample_quantities`

Last returned measured quantities from a call to `next_sample()`

Type Union[List, DataFrame, np.ndarray]

`_current_sample_target`

Last returned target labels from a call to `next_sample()`

Type Union[List, DataFrame, np.ndarray]

`_current_sample_time`

dtype can be either float or datetime64 to indicate the time when the `_current_sample_quantities` were measured.

Type Union[List, DataFrame, np.ndarray]

`_sample_idx`

Current sample index

Type int

`_n_samples`

Total number of samples

Type int

`_data_source_type`

Explicitly account for the data source type: either “function” or “dataset”

Type str

`_generator_function`

A generator function which takes in at least one argument `time` which will be used in `next_sample()`

Type Callable

`_generator_parameters`

Any additional keyword arguments to be supplied to the generator function. The generator function call for every sample will be supplied with the `**generator_parameters`.

Type Dict

`sfreq`

Sampling frequency

Type int

`_metadata`

The quantities metadata as `time_series_metadata.scheme.MetaData`

Type MetaData

`_default_generator_function` (*time*)

This is the default generator function used, if non was specified

Parameters `time` (Union[List, DataFrame, np.ndarray]) –

_next_sample_data_source (*batch_size: int = 1*) → Dict[str, Union[List[T], pandas.core.frame.DataFrame, numpy.ndarray]]

Internal method for fetching latest samples from a dataset.

Parameters **batch_size** (*int*) – number of batches to get from data stream

Returns **samples** – {'quantities': current_sample_quantities, 'target': current_sample_target}

Return type Dict

_next_sample_generator (*batch_size: int = 1*) → Dict[str, numpy.ndarray]

Internal method for generating a batch of samples from the generator function.

_set_data_source_type (*dt_type: str = 'function'*)

To explicitly account for the type of data source: either from dataset, or a generator function.

Parameters **dt_type** (*str*) – Either “function” or “dataset”

all_samples () → Dict[str, Union[List[T], pandas.core.frame.DataFrame, numpy.ndarray]]

Returns all the samples in the data stream

Returns **samples** – {'x': current_sample_x, 'y': current_sample_y}

Return type Dict

next_sample (*batch_size: int = 1*)

Fetches the latest *batch_size* samples from the iterables: quantities, time and target. This advances the internal pointer *_sample_idx* by *batch_size*.

Parameters **batch_size** (*int*) – number of batches to get from data stream

Returns **samples** – {'time': current_sample_time, 'quantities': current_sample_quantities, 'target': current_sample_target}

Return type Dict

randomize_data ()

Randomizes the provided quantities, useful in machine learning contexts

set_data_source (*quantities: Union[List[T], pandas.core.frame.DataFrame, numpy.ndarray] = None, target: Union[List[T], pandas.core.frame.DataFrame, numpy.ndarray, None] = None, time: Union[List[T], pandas.core.frame.DataFrame, numpy.ndarray, None] = None*)

This sets the data source by providing up to three iterables: quantities, time and target which are assumed to be aligned.

For sensors data, we assume: The format shape for 2D data stream (timesteps, n_sensors) The format shape for 3D data stream (num_cycles, timesteps, n_sensors)

Parameters

- **quantities** (*Union[List, DataFrame, np.ndarray]*) – Measured quantities such as sensors readings.
- **target** (*Optional[Union[List, DataFrame, np.ndarray]]*) – Target label in the context of machine learning. This can be Remaining Useful Life in predictive maintenance application. Note this can be an unobservable variable in real-time and applies only for validation during offline analysis.
- **time** (*Optional[Union[List, DataFrame, np.ndarray]]*) – dtype can be either float or datetime64 to indicate the time when the quantities were measured.

set_generator_function (*generator_function: Callable = None, sfreq: int = None, **kwargs*)

Sets the data source to a generator function. By default, this function resorts to a sine wave generator function. Initialisation of the generator's parameters should be done here such as setting the sampling frequency and wave frequency. For setting it with a dataset instead, see [set_data_source\(\)](#).

Parameters

- **generator_function** (*Callable*) – A generator function which takes in at least one argument *time* which will be used in [next_sample\(\)](#). Parameters of the function can be fixed by providing additional arguments such as the wave frequency.
- **sfreq** (*int*) – Sampling frequency.
- ****kwargs** (*Any*) – Any additional keyword arguments to be supplied to the generator function. The ****kwargs** will be saved as [_generator_parameters](#). The generator function call for every sample will be supplied with the ****generator_parameters**.

set_metadata (*device_id: str, time_name: str, time_unit: str, quantity_names: Union[str, Tuple[str, ...]], quantity_units: Union[str, Tuple[str, ...]], misc: Optional[Any] = None*)

Set the quantities metadata as a `MetaData` object

Details you find in the [time_series_metadata.scheme.MetaData](#) documentation.

Parameters

- **device_id** (*str*) – Name of the represented generator
- **time_name** (*str*) – Name for the time dimension
- **time_unit** (*str*) – Unit for the time
- **quantity_names** (*iterable of str or str*) – A string or an iterable of names of the represented quantities' values
- **quantity_units** (*iterable of str or str*) – An iterable of units for the quantities' values
- **misc** (*Any, optional*) – This parameter can take any additional metadata which will be handed over to the corresponding attribute of the created `Metadata` object

19.2 Signal streams

class `agentMET4FOF.streams.signal_streams.SineGenerator` (*sfreq=500, sine_freq=50, amplitude: float = 1.0, initial_phase: float = 0.0*)

Built-in class of sine wave generator which inherits all methods and attributes from `DataStreamMET4FOF`. [sine_wave_function\(\)](#) is a custom defined function which has a required keyword *time* as argument and any number of optional additional arguments (e.g *F*) to be supplied to the [DataStreamMET4FOF.set_generator_function\(\)](#).

Parameters

- **sfreq** (*int*) – sampling frequency which determines the time step when [next_sample\(\)](#) is called
- **sine_freq** (*float*) – frequency of wave function
- **amplitude** (*float, optional*) – Amplitude of the wave function. Defaults to 1.
- **initial_phase** (*float, optional*) – Initial phase of the wave function. Defaults to 0.0.

sine_wave_function (*time, sine_freq, amplitude, initial_phase*)

A simple sine wave generator

```
class agentMET4FOF.streams.signal_streams.CosineGenerator (sfreq=500, cosine_freq=50, amplitude: float = 1, initial_phase: float = 0)
```

Built-in class of cosine wave generator which inherits all methods and attributes from `DataStreamMET4FOF`. `cosine_wave_function()` is a custom defined function which has a required keyword `time` as argument and any number of optional additional arguments (e.g `cosine_freq`) to be supplied to the `DataStreamMET4FOF.set_generator_function()`.

Parameters

- **sfreq** (*int*) – sampling frequency which determines the time step when `next_sample()` is called
- **cosine_freq** (*int*) – frequency of wave function
- **amplitude** (*float, optional*) – Amplitude of the wave function. Defaults to 1.0.
- **initial_phase** (*float, optional*) – Initial phase of the wave function. Defaults to 0.0.

cosine_wave_function (*time, cosine_freq, amplitude, initial_phase*)

A simple cosine wave generator

19.3 Metrologically enabled base streams

```
class agentMET4FOF.streams.metrological_base_streams.MetrologicalDataStreamMET4FOF (value_unc: Optional[float] = 0.0, time_unc: Optional[float] = 0.0, exp_unc: Optional[float] = None, cov_factor: Optional[float] = 1.0)
```

Abstract class for creating datastreams with metrological information. Inherits from the `DataStreamMET4FOF` class

To create a new `MetrologicalDataStreamMET4FOF` class, inherit this class and call `set_metadata()` in the constructor. Choose one of two types of datastreams to be created:

- from dataset file (`set_data_source()`), or

- a waveform generator function (`set_generator_function()`).

Alternatively, override the `next_sample()` function if neither option suits the application. For generator functions, `sfreq` is a required variable to be set on `init` which sets the sampling frequency and the time-step which occurs when `next_sample()` is called.

For an example implementation of using generator function, see the built-in `MetrologicalSineGenerator` class. See tutorials for more implementations.

`_generator_function_unc`

A generator function for the time and quantity uncertainties which takes in at least one argument `time` which will be used in `next_sample()`. The return value must be a 2-tuple of time and value uncertainties each of one of the three types:

- `np.ndarray`
- `pandas.DataFrame`
- `list`

Type Callable

`_uncertainty_parameters`

Any additional keyword arguments to be supplied to the generator function. Both the calls of the value generator function and of the uncertainty generator function will be supplied with the `**_uncertainty_parameters`.

Type Dict

`_default_uncertainty_generator` (`time: Union[List[T], pandas.core.frame.DataFrame, numpy.ndarray]`, `values: Union[List[T], pandas.core.frame.DataFrame, numpy.ndarray]`) \rightarrow `Tuple[numpy.ndarray, numpy.ndarray]`

Default (standard) uncertainty generator function

Parameters

- **`time`** (`Union[List, DataFrame, np.ndarray]`) – timestamps
- **`values`** (`Union[List, DataFrame, np.ndarray]`) – values corresponding to timestamps

Returns constant time and value uncertainties each of the same shape as `time`

Return type `Tuple[np.ndarray, np.ndarray]`

`_next_sample_generator` (`batch_size: int = 1`) \rightarrow `numpy.ndarray`

Internal method for generating a batch of samples from the generator function. Overrides `DataStreamMET4FOF._next_sample_generator()`. Adds time uncertainty `ut` and measurement uncertainty `uv` to sample

`set_generator_function` (`generator_function: Callable = None`, `uncertainty_generator: Callable = None`, `sfreq: int = None`, `**kwargs`) \rightarrow `Callable`

Set value and uncertainty generators based on user-defined functions. By default, this function resorts to a sine wave generator function and a constant (zero) uncertainty. Initialisation of the generator's parameters should be done here such as setting the sampling frequency and wave frequency. For setting it with a dataset instead, see `set_data_source()`. Overwrites the default `DataStreamMET4FOF.set_generator_function()` method.

Parameters

- **`generator_function`** (`callable`) – A generator function which takes in at least one argument `time` which will be used in `next_sample()`.

- **uncertainty_generator** (*callable*) – An uncertainty generator function which takes in at least one argument `time` which will be used in `next_sample()`.
- **sfreq** (*int*) – Sampling frequency.
- ****kwargs** (*Optional[Dict[str, Any]]*) – Any additional keyword arguments to be supplied to the generator function. The ****kwargs** will be saved as `_uncertainty_parameters`. Both the calls of the value generator function and of the uncertainty generator function will be supplied with the `**uncertainty_parameters`.

Returns The uncertainty generator function

Return type Callable

time_unc

uncertainties associated with timestamps

Type Union[float, Iterable[float]]

value_unc

uncertainties associated with the values

Type Union[float, Iterable[float]]

19.4 Metrologically enabled signal streams

```
class agentMET4FOF.streams.metrological_signal_streams.MetrologicalMultiWaveGenerator (sfreq:
    int
    =
    500,
    freq_a
    numpy
    =
    ar-
    ray([5
    am-
    pli-
    tude_a
    numpy
    =
    ar-
    ray([1
    ini-
    tial_ph
    numpy
    =
    ar-
    ray([0
    in-
    ter-
    cept:
    float
    =
    0,
    de-
    vice_id
    str
    =
    'Mul-
    ti-
    Wave-
    Data-
    Gen-
    er-
    a-
    tor',
    time_n
    str
    =
    'time',
    time_u
    str
    =
    's',
    quan-
    tity_na
    Union,
    Tu-
    ple[str
    ...]]
    =
    ('Leng
    'Mass
    quan
```

Values with associated uncertainty are returned.

Parameters

- **sfreq** (*float*) – sampling frequency which determines the time step when `next_sample` is called.
- **intercept** (*float*) – constant intercept of the signal
- **freq_arr** (*np.ndarray of float*) – array with frequencies of components included in the signal
- **amplitude_arr** (*np.ndarray of float*) – array with amplitudes of components included in the signal
- **initial_phase_arr** (*np.ndarray of float*) – array with initial phases of components included in the signal
- **noisy** (*bool*) – boolean to determine whether the generated signal should be noisy or “clean” defaults to True

```
class agentMET4FOF.streams.metrological_signal_streams.MetrologicalSineGenerator (sfreq:
int
=
500,
sine_freq:
float
=
50,
am-
pli-
tude:
float
=
1.0,
ini-
tial_phase:
float
=
0.0,
de-
vice_id:
str
=
'Si-
ne-
Gen-
er-
a-
tor',
time_name:
str
=
'time',
time_unit:
str
=
's',
quan-
tity_names:
Union[str,
Tu-
ple[str,
...]]
=
'Volt-
age',
quan-
tity_units:
Union[str,
Tu-
ple[str,
...]]
=
'V',
misc:
Op-
tional[Any]
=
'Sim-
ple
```

Built-in class of sine wave generator

Parameters

- **sfreq** (*int, optional*) – Sampling frequency which determines the time step when *next_sample()* is called. Defaults to 500.
- **sine_freq** (*float, optional*) – Frequency of the wave function. Defaults to 50.0.
- **amplitude** (*float, optional*) – Amplitude of the wave function. Defaults to 1.0.
- **initial_phase** (*float, optional*) – Initial phase of the wave function. Defaults to 0.0.
- **device_id** (*str, optional*) – Name of the represented generator. Defaults to ‘Sine-Generator’.
- **time_name** (*str, optional*) – Name for the time dimension. Defaults to ‘time’.
- **time_unit** (*str, optional*) – Unit for the time. Defaults to ‘s’.
- **quantity_names** (*iterable of str or str, optional*) – An iterable of names of the represented quantities’ values. Defaults to (‘Voltage’)
- **quantity_units** (*iterable of str or str, optional*) – An iterable of units for the quantities’ values. Defaults to (‘V’)
- **misc** (*Any, optional*) – This parameter can take any additional metadata which will be handed over to the corresponding attribute of the created *Metadata* object. Defaults to ‘Simple sine wave generator’.
- **value_unc** (*iterable of floats or float, optional*) – standard uncertainty(ies) of the quantity values. Defaults to 0.1.
- **time_unc** (*iterable of floats or float, optional*) – standard uncertainty of the time stamps. Defaults to 0.0.

_sine_wave_function (*time, sine_freq, amplitude, initial_phase*)

A simple sine wave generator

agentMET4FOF dashboard

```
class agentMET4FOF.dashboard.Dashboard.AgentDashboard(dashboard_modules=[],
                                                    dashboard_layouts=[], dash-
                                                    board_update_interval=3,
                                                    max_monitors=10,
                                                    ip_addr='127.0.0.1',
                                                    port=8050,           agent-
                                                    Network='127.0.0.1',
                                                    agent_ip_addr=3333,
                                                    agent_port=None,       net-
                                                    work_stylesheet=[],
                                                    hide_default_edge=True,
                                                    **kwargs)
```

Class for the web dashboard which runs with the AgentNetwork object, which by default are on the same IP. Optional to run the dashboard on a separate IP by providing the right parameters. See example for an implementation of a separate run of dashboard to connect to an existing agent network. If there is no existing agent network, error will show up. An internal `_Dashboard_Control` object is instantiated inside this object, which manages access to the AgentNetwork.

```
init_app_layout(update_interval_seconds=3, max_monitors=10, dashboard_layouts=[], net-
                 work_stylesheet=[], hide_default_edge=True, **kwargs)
```

Initialises the overall dash app “layout” which has two sub-pages (Agent network and ML experiment)

Parameters

- **update_interval_seconds** (*float or int*) – Auto refresh rate which the app queries the states of Agent Network to update the graphs and display
- **max_monitors** (*int*) – Due to complexity in managing and instantiating dynamic figures, a maximum number of monitors is specified first and only the each Monitor Agent will occupy one of these figures. It is not ideal, but will undergo changes for the better.

Returns app

Return type Dash app object

is_port_available (*ip_addr*, *_port*)
Check if desired ip and port are available.

run ()
This is actually executed on calling start() and brings up the server

class agentMET4FOF.dashboard.Dashboard.**AgentDashboardProcess** (*dashboard_modules=[]*,
dash-
board_layouts=[],
dash-
board_update_interval=3,
max_monitors=10,
ip_addr='127.0.0.1',
port=8050,
agentNet-
work='127.0.0.1',
agent_ip_addr=3333,
agent_port=None,
net-
work_stylesheet=[],
hide_default_edge=True,
***kwargs*)

Represents an agent dashboard for the osBrain backend

terminate ()
This is shutting down the application server serving the web interface

class agentMET4FOF.dashboard.Dashboard.**AgentDashboardThread** (*dashboard_modules=[]*,
dash-
board_layouts=[],
dash-
board_update_interval=3,
max_monitors=10,
ip_addr='127.0.0.1',
port=8050,
agentNet-
work='127.0.0.1',
agent_ip_addr=3333,
agent_port=None,
***kwargs*)

Represents an agent dashboard for the Mesa backend

run ()
This is actually executed on calling start() and brings up the server

terminate ()
This is shutting down the application server serving the web interface

CHAPTER 21

agentMET4FOF agent network

```

class agentMET4FOF.network.AgentNetwork(ip_addr='127.0.0.1', port=3333, connect=False, log_filename='log_file.csv', dashboard_modules=True, dashboard_extensions=[], dashboard_update_interval=3, dashboard_max_monitors=10, dashboard_port=8050, backend='osbrain', mesa_update_interval=0.1, network_stylesheet=[{'selector': 'node', 'style': {'label': 'data(id)', 'shape': 'rectangle', 'text-align': 'center', 'text-halign': 'center', 'color': '#FFF', 'text-outline-width': 1.5, 'text-outline-color': '#000232'}}, {'selector': 'edge', 'style': {'curve-style': 'unbundled-bezier', 'mid-target-arrow-shape': 'triangle', 'arrow-scale': 2, 'line-color': '#4287f5', 'mid-target-arrow-color': '#4287f5', 'label': 'data(channel)', 'text-outline-width': 1.5, 'text-outline-color': '#000232', 'color': '#FFF', 'text-margin-x': '10px', 'text-margin-y': '20px'}}, {'selector': '.rectangle', 'style': {'shape': 'rectangle'}}, {'selector': '.triangle', 'style': {'shape': 'triangle'}}, {'selector': '.octagon', 'style': {'shape': 'octagon'}}, {'selector': '.ellipse', 'style': {'shape': 'ellipse'}}, {'selector': '.bluebackground', 'style': {'background-color': '#c4fdff'}}, {'selector': '.blue', 'style': {'background-color': '#006db5'}}, {'selector': '.coalition', 'style': {'background-color': '#c4fdff', 'text-align': 'top', 'text-halign': 'center'}}, {'selector': '.coalition-edge', 'style': {'line-style': 'dashed'}}, {'selector': '.outline', 'style': {'color': '#fff', 'text-outline-color': '#888', 'text-outline-width': 2}}], **dashboard_kwargs)

```

Object for starting a new Agent Network or connect to an existing Agent Network

An existing Agent Network can be specified by ip & port. Provides function to add agents, (un)bind agents, query agent network state, set global agent states Interfaces with an internal `_AgentController` which is hidden from user.

class Coalition (*name='Coalition', agents=[]*)

A special class for grouping agents.

It is rendered as a parent group on the dashboard, along with its member agents.

class MesaModel

A MESA Model

shutdown ()

Shutdown entire MESA model with all agents and schedulers

step ()

Advance the model by one step.

class _AgentController (*name="", host=None, serializer=None, transport=None, attributes=None, backend='osbrain', mesa_model=None*)

Unique internal agent to provide control to other agents

Automatically instantiated when starting server. Provides global control to all agents in network.

_get_logger ()

Internal method to access the Logger relative to the nameserver

add_coalition (*new_coalition*)

Instantiates a coalition of agents.

add_coalition_agent (*name, agents=[]*)

Add agents into the coalition

get_coalition (*name*)

Gets the coalition based on provided name

init_parameters (*ns=None, backend='osbrain', mesa_model="", log_mode=True*)

User provided function to initialize parameters of choice.

remove_coalition_agent (*coalition_name, agent_name=""*)

Remove agent from coalition

class _Logger (*name="", host=None, serializer=None, transport=None, attributes=None, backend='osbrain', mesa_model=None*)

An internal logger agent which is instantiated with each AgentNetwork

It collects all the logs which are sent to it, and print them and optionally save them into a csv log file. Since the user is not expected to directly access the logger agent, its initialisation option and interface are provided via the AgentNetwork object.

When log_info of any agent is called, the agent will send the data to the logger agent.

init_parameters (*log_filename='log_file.csv', save_logfile=True*)

User provided function to initialize parameters of choice.

_get_controller ()

Internal method to access the AgentController relative to the nameserver

_get_logger ()

Internal method to access the Logger relative to the nameserver

_get_mode ()

Returns state – State of Agent Network

Return type `str`

`_set_mode` (*state*)

Internal method to set mode of Agent Controller :param state: State of AgentController to set. :type state: str

`add_agent` (*name=' '*, *agentType=<class 'agentMET4FOF.agents.base_agents.AgentMET4FOF'>*, *log_mode=True*, *buffer_size=1000*, *ip_addr=None*, *loop_wait=None*, ***kwargs*)

Instantiates a new agent in the network.

Parameters

- **`name`** (*str*, *optional*) – Unique name of agent, defaults to the agent’s class name.
- **`agentType`** (*AgentMET4FOF*, *optional*) – Agent class to be instantiated in the network. Defaults to *AgentMET4FOF*
- **`log_mode`** (*bool*, *optional*) – Determines if messages will be logged to background Logger Agent. Defaults to *True*.

Returns Newly instantiated agent

Return type *AgentMET4FOF*

`add_coalition` (*name='Coalition_1'*, *agents=[]*)

Instantiates a coalition of agents.

`add_coalition_agent` (*name='Coalition_1'*, *agents=[]*)

Add agents into the coalition

`agents` (*filter_agent: Optional[str] = None*) → *List[str]*

Returns all or subset of agents’ names connected to agent network

Parameters **`filter_agent`** (*str*, *optional*) – if present, only those names are returned which contain *filter_agent*’s value

Returns requested names of agents

Return type *list[str]*

`bind_agents` (*source*, *target*, *channel='default'*)

Binds two agents’ communication channel in a unidirectional manner

Any subsequent calls of *source.send_output()* will reach *target* agent’s message queue.

Parameters

- **`source`** (*AgentMET4FOF*) – Source agent whose Output channel will be binded to *target*
- **`target`** (*AgentMET4FOF*) – Target agent whose Input channel will be binded to *source*

`connect` (*ip_addr='127.0.0.1'*, *port=3333*, *verbose=True*)

Only for osbrain backend. Connects to an existing AgentNetwork.

Parameters

- **`ip_addr`** (*str*) – IP Address of server to connect to
- **`port`** (*int*) – Port of server to connect to

`get_agent` (*agent_name*)

Returns a particular agent connected to Agent Network.

Parameters **`agent_name`** (*str*) – Name of agent to search for in the network

get_coalition (*name*)

Returns the coalition with the provided name

get_mode ()

Returns **state** – State of Agent Network

Return type **str**

remove_coalition_agent (*coalition_name*, *agent_name*=")

Remove agent from coalition

set_agents_state (*filter_agent*=None, *state*='Idle')

Blanket operation on all agents to set their *current_state* to given state

Can be used to define different states of operation such as “Running”, “Idle”, “Stop”, etc.. Users will need to define their own flow of handling each type of *self.current_state* in the *agent_loop*.

Parameters

- **filter_agent** (*str*) – (Optional) Filter name of agents to set the states
- **state** (*str*) – State of agents to set

set_running_state (*filter_agent*=None)

Blanket operation on all agents to set their *current_state* to “Running”

Users will need to define their own flow of handling each type of *self.current_state* in the *agent_loop*.

Parameters **filter_agent** (*str*) – (Optional) Filter name of agents to set the states

set_stop_state (*filter_agent*=None)

Blanket operation on all agents to set their *current_state* attribute to “Stop”

Users will need to define their own flow of handling each type of *self.current_state* in the *agent_loop*.

Parameters **filter_agent** (*str*) – (Optional) Filter name of agents to set the states

shutdown ()

Shuts down the entire agent network and all agents

start_server_mesa ()

Starts a new AgentNetwork for Mesa and initializes *_controller*

Handles the initialisation for *backend == "mesa"*. Involves spawning two nested objects *mesa_model* and *_controller* and calls *start_mesa_timer()*.

start_server_osbrain (*ip_addr*: *str* = '127.0.0.1', *port*: *int* = 3333)

Starts a new AgentNetwork for osBrain and initializes *_controller*

Parameters

- **ip_addr** (*str*) – IP Address of server to start
- **port** (*int*) – Port of server to start

unbind_agents (*source*, *target*)

Unbinds two agents communication channel in a unidirectional manner

This is the reverse of *bind_agents()*

Parameters

- **source** (*AgentMET4FOF*) – Source agent whose Output channel will be unbinded from *target*

- **target** (`AgentMET4FOF`) – Target agent whose Input channel will be unbinded from *source*

22.1 Buffering for agents

This module contains the buffer classes utilized by the agents

It contains the following classes:

- *AgentBuffer*: Buffer class which is instantiated in every agent to store data incrementally
- *MetrologicalAgentBuffer*: Buffer class which is instantiated in every metrological agent to store data

class agentMET4FOF.utils.buffer.**AgentBuffer** (*buffer_size*: int = 1000)

Buffer class which is instantiated in every agent to store data incrementally

This buffer is necessary to handle multiple inputs coming from agents.

We can access the buffer like a dict with exposed functions such as `.values()`, `.keys()` and `.items()`. The actual dict object is stored in the variable *buffer*.

buffer

The buffer can be a dict of iterables, or a dict of dict of iterables for nested named data. The keys are the names of agents.

Type dict of iterables or dict of dicts of iterables

buffer_size

The total number of elements to be stored in the agent *buffer*

supported_datatypes

List of all types supported and thus properly handled by the buffer. Defaults to `np.ndarray`, `list` and `Pandas DataFrame`

Type list of types

_concatenate (*iterable*: Union[`numpy.ndarray`, `list`, `pandas.core.frame.DataFrame`], *data*: Union[`numpy.ndarray`, `list`, `pandas.core.frame.DataFrame`], *concat_axis*: int = 0) → Iterable[T_co]

Concatenate the given iterable with data

Handles the concatenation function depending on the datatype, and truncates it if the buffer is filled to *buffer_size*.

Parameters

- **iterable** (*any in supported_datatype*) – The current buffer to be concatenated with.
- **data** (*np.ndarray, DataFrame, list*) – New incoming data

Returns the original buffer with the data appended

Return type *any in supported_datatype*

`_iterable_filled` (*iterable: Sized*) → *Optional[bool]*

Internal method for checking on length of iterables of supported types

Parameters **iterable** (*Any*) – Expected to be an iterable of one of the supported datatypes but could be any.

Returns True if the iterable is of one of the supported datatypes and has reached *buffer_size* in length or False if not or None in case it is not of one of the supported datatypes.

Return type *bool or None*

static **`_popleft`** (*iterable: Union[*numpy.ndarray*, *list*, *pandas.core.frame.DataFrame*],
n: *Optional[int]* = 1) → *Tuple[Union[*numpy.ndarray*, *list*,
pandas.core.frame.DataFrame], Union[*numpy.ndarray*, *list*, *pan-*
das.core.frame.DataFrame]]**

Internal handler of the actual popping mechanism based on type of iterable

Parameters

- **n** (*int*) – Number of elements to retrieve from buffer.
- **iterable** (*any in supported_datatypes*) – The current buffer to retrieve from.

Returns

- 2-tuple of each either one of *np.ndarray*,
- *list* or *Pandas DataFrame* – The retrieved elements and the residual items in the buffer

`buffer_filled` (*agent_from: Optional[str] = None*) → *bool*

Checks whether buffer is filled, by comparing against the *buffer_size*

For nested dict, this returns True if any of the iterables is beyond the *buffer_size*. For any of the dict values, which is not one of *supported_datatypes* this returns None.

Parameters **agent_from** (*str, optional*) – Name of input agent in the buffer dict to be looked up. If *agent_from* is not provided, we check for all iterables in the buffer (default).

Returns True if either the or any of the iterables has reached *buffer_size* or None in case none of the values is of one of the supported datatypes. False if all present iterable can take at least one more element according to *buffer_size*.

Return type *bool or None*

`check_supported_datatype` (*obj: object*) → *bool*

Checks whether *value* is an object of one of the supported data types

Parameters **obj** (*object*) – Value to be checked

Returns **result** – True if value is an object of one of the supported data types, False if not

Return type *boolean*

clear (*agent_from: Optional[str] = None*)

Clears the data in the buffer

Parameters **agent_from** (*str, optional*) – Name of agent, if *agent_from* is not given, the entire buffer is flushed. (default)

items ()

Interface to access the internal dict's items()

keys ()

Interface to access the internal dict's keys()

popleft (*n: Optional[int] = 1*) → Union[Dict[KT, VT], numpy.ndarray, list, pandas.core.frame.DataFrame]

Pops the first *n* entries in the buffer

Parameters **n** (*int*) – Number of elements to retrieve from buffer

Returns

- dict, np.ndarray, list or Pandas
- DataFrame – The retrieved elements

store (*agent_from: Union[Dict[str, Union[numpy.ndarray, list, pandas.core.frame.DataFrame]], str], data: Union[numpy.ndarray, list, pandas.core.frame.DataFrame, float, int] = None, concat_axis: Optional[int] = 0*)

Stores data into *buffer* with the received message

Checks if sender agent has sent any message before. If it did, then append, otherwise create new entry for it.

Parameters

- **agent_from** (*dict | str*) – if type is dict, we expect it to be the agentMET4FOF dict message to be compliant with older code (keys from and data present'), otherwise we expect it to be name of agent sender and data will need to be passed as parameter
- **data** (*np.ndarray, DataFrame, list, float or int*) – Not used if *agent_from* is a dict. Otherwise data is compulsory.
- **concat_axis** (*int, optional*) – axis to concatenate on with the buffering for numpy arrays. Default is 0.

update (*agent_from: Union[Dict[str, Union[numpy.ndarray, list, pandas.core.frame.DataFrame]], str], data: Union[numpy.ndarray, list, pandas.core.frame.DataFrame, float, int] = None*)

Overrides data in the buffer dict keyed by *agent_from* with value *data*

If *data* is a single value, this converts it into a list first before storing in the buffer dict.

Parameters

- **agent_from** (*str*) – Name of agent sender
- **data** (*np.ndarray, DataFrame, list, float or int*) – New incoming data

values ()

Interface to access the internal dict's values()

class agentMET4FOF.utils.buffer.**MetrologicalAgentBuffer** (*buffer_size: int = 1000*)

Buffer class which is instantiated in every metrological agent to store data

This buffer is necessary to handle multiple inputs coming from agents.

We can access the buffer like a dict with exposed functions such as `.values()`, `.keys()` and `.items()`. The actual dict object is stored in the attribute `buffer`. The list in `supported_datatypes` contains one more element for metrological agents, namely `TimeSeriesBuffer`.

`_concatenate` (*iterable: `time_series_buffer.buffer.TimeSeriesBuffer`, `data: Union[numpy.ndarray, list, pandas.core.frame.DataFrame]`, `concat_axis: int = 0`*) → *time_series_buffer.buffer.TimeSeriesBuffer*

Concatenate the given `TimeSeriesBuffer` with data

Add data to the `TimeSeriesBuffer` object.

Parameters

- **`iterable`** (*`TimeSeriesBuffer`*) – The current buffer to be concatenated with.
- **`data`** (*`np.ndarray`, `DataFrame`, `list`*) – New incoming data

Returns the original buffer with the data appended

Return type `TimeSeriesBuffer`

`convert_single_to_tsbuffer` (*single_data: `Union[List[T], Tuple, numpy.ndarray]`*)

Convert common data in agentMET4FOF to `TimeSeriesBuffer`

Parameters **`single_data`** (*iterable of iterables (`list`, `tuple`, `np.ndarray`) with shape (`N`, `M`)*) –

- `M==2` (pairs): assumed to be like (time, value)
- `M==3` (triple): assumed to be like (time, value, value_unc)
- `M==4` (4-tuple): assumed to be like (time, time_unc, value, value_unc)

Returns the new `TimeSeriesBuffer` object

Return type `TimeSeriesBuffer`

`update` (*agent_from: `str`, `data: Union[Dict[KT, VT], List[T], Tuple, numpy.ndarray]`*) → *time_series_buffer.buffer.TimeSeriesBuffer*

Overrides data in the buffer dict keyed by `agent_from` with value `data`

Parameters

- **`agent_from`** (*`str`*) – Name of agent sender
- **`data`** (*`dict` or iterable of iterables (`list`, `tuple`, `np.ndarray`) with shape (`N`, `M`)*) – the data to be stored in the metrological buffer

Returns the updated `TimeSeriesBuffer` object

Return type `TimeSeriesBuffer`

CHAPTER 23

Indices and search:

- `genindex`
- `modindex`
- `search`

CHAPTER 24

References:

Bibliography

- [Bang2019] Bang X. Yong, A. Brintrup Multi Agent System for Machine Learning Under Uncertainty in Cyber Physical Manufacturing System, 9th Workshop on Service Oriented, Holonic and Multi-agent Manufacturing Systems for Industry of the Future
- [Kok2020_1] G. Kok, P. Harris “Uncertainty Evaluation for Metrologically Redundant Industrial Sensor Networks”, 2020 IEEE International Workshop on Metrology for Industry 4.0 & IoT, Roma, Italy, 2020, pp. 84-88, doi: [10.1109/MetroInd4.0IoT48571.2020.9138297](https://doi.org/10.1109/MetroInd4.0IoT48571.2020.9138297).
- [Kok2020_2] G. Kok, P. Harris “Quantifying Metrological Redundancy in an Industry 4.0 Environment”, 2020 IEEE International Workshop on Metrology for Industry 4.0 & IoT, Roma, Italy, 2020, pp. 464-468, doi: [10.1109/MetroInd4.0IoT48571.2020.9138235](https://doi.org/10.1109/MetroInd4.0IoT48571.2020.9138235).

a

`agentMET4FOF.agents.base_agents`, [133](#)
`agentMET4FOF.agents.metrological_base_agents`,
 [140](#)
`agentMET4FOF.agents.metrological_signal_agents`,
 [142](#)
`agentMET4FOF.agents.signal_agents`, [140](#)
`agentMET4FOF.dashboard.Dashboard`, [157](#)
`agentMET4FOF.network`, [160](#)
`agentMET4FOF.streams.base_streams`, [145](#)
`agentMET4FOF.streams.metrological_base_streams`,
 [149](#)
`agentMET4FOF.streams.metrological_signal_streams`,
 [153](#)
`agentMET4FOF.streams.signal_streams`, [148](#)
`agentMET4FOF.utils.buffer`, [165](#)

Symbols

<code>_bind_output()</code>	(agent- <i>MET4FOF.agents.base_agents.AgentMET4FOF</i> method), 133	attribute), 146 <code>_generator_function_unc</code> (agent- <i>MET4FOF.streams.metrological_base_streams.MetrologicalData</i> attribute), 150
<code>_concatenate()</code>	(agent- <i>MET4FOF.utils.buffer.AgentBuffer</i> method), 165	<code>_generator_parameters</code> (agent- <i>MET4FOF.streams.base_streams.DataStreamMET4FOF</i> attribute), 146
<code>_concatenate()</code>	(agent- <i>MET4FOF.utils.buffer.MetrologicalAgentBuffer</i> method), 168	<code>_get_controller()</code> (agent- <i>MET4FOF.network.AgentNetwork</i> method), 161
<code>_convert_matplotlib_fig()</code>	(agent- <i>MET4FOF.agents.base_agents.AgentMET4FOF</i> method), 133	<code>_get_logger()</code> (agent- <i>MET4FOF.network.AgentNetwork</i> method), 161
<code>_convert_to_plotly()</code>	(agent- <i>MET4FOF.agents.base_agents.AgentMET4FOF</i> method), 133	<code>_get_logger()</code> (agent- <i>MET4FOF.network.AgentNetwork._AgentController</i> method), 161
<code>_current_sample_quantities</code>	(agent- <i>MET4FOF.streams.base_streams.DataStreamMET4FOF</i> attribute), 146	<code>_get_metadata()</code> (agent- <i>MET4FOF.agents.base_agents.AgentMET4FOF</i> method), 133
<code>_current_sample_target</code>	(agent- <i>MET4FOF.streams.base_streams.DataStreamMET4FOF</i> attribute), 146	<code>_get_mode()</code> (agent- <i>MET4FOF.network.AgentNetwork</i> method), 161
<code>_current_sample_time</code>	(agent- <i>MET4FOF.streams.base_streams.DataStreamMET4FOF</i> attribute), 146	<code>_input_data</code> (agent- <i>MET4FOF.agents.metrological_base_agents.MetrologicalAgent</i> attribute), 140
<code>_data_source_type</code>	(agent- <i>MET4FOF.streams.base_streams.DataStreamMET4FOF</i> attribute), 146	<code>_is_type_message()</code> (agent- <i>MET4FOF.agents.base_agents.AgentMET4FOF</i> method), 133
<code>_default_generator_function()</code>	(agent- <i>MET4FOF.streams.base_streams.DataStreamMET4FOF</i> method), 146	<code>_iterable_filled()</code> (agent- <i>MET4FOF.utils.buffer.AgentBuffer</i> method), 166
<code>_default_uncertainty_generator()</code>	(agent- <i>MET4FOF.streams.metrological_base_streams.MetrologicalData</i> method), 150	<code>_metadata</code> (agent- <i>MET4FOF.streams.base_streams.DataStreamMET4FOF</i> attribute), 146 <code>_n_samples</code> (agent- <i>MET4FOF.streams.base_streams.DataStreamMET4FOF</i> attribute), 146
<code>_fig_to_uri()</code>	(agent- <i>MET4FOF.agents.base_agents.AgentMET4FOF</i> method), 133	<code>_next_sample_data_source()</code> (agent- <i>MET4FOF.streams.base_streams.DataStreamMET4FOF</i> method), 146
<code>_generator_function</code>	(agent- <i>MET4FOF.streams.base_streams.DataStreamMET4FOF</i> method), 146	<code>_next_sample_generator()</code> (agent- <i>MET4FOF.streams.base_streams.DataStreamMET4FOF</i> method), 146

`method`), 147
`_next_sample_generator()` (agent- `MET4FOF.agents.base_agents.AgentMET4FOF`
`MET4FOF.streams.metrological_base_streams.MetrologicalDataStream` (module), 134
`method`), 150
`_output_data` (agent- `MET4FOF.agents.base_agents.DataStreamAgent`
`MET4FOF.agents.metrological_base_agents.MetrologicalAgent` (class in `agentMET4FOF`), 138
`attribute`), 141
`_popleft()` (agent- `MET4FOF.agents.metrological_base_agents.MetrologicalAgent`
`static method`), 166
`_quantities` (agent- `agent_loop()` (agent-
`MET4FOF.streams.base_streams.DataStreamMET4FOF` (class in `agentMET4FOF`), 134
`attribute`), 145
`_remove_methods()` (agent- `agent_loop()` (agent-
`MET4FOF.agents.base_agents.AgentMET4FOF` (class in `agentMET4FOF`), 134
`method`), 134
`_sample_idx` (agent- `AgentBuffer` (class in `agentMET4FOF.utils.buffer`),
`MET4FOF.streams.base_streams.DataStreamMET4FOF` (class in `agentMET4FOF`), 134
`attribute`), 146
`_set_data_source_type()` (agent- `AgentDashboard` (class in `agentMET4FOF.dashboard.Dashboard`), 157
`MET4FOF.streams.base_streams.DataStreamMET4FOF` (class in `agentMET4FOF`), 134
`method`), 147
`_set_mode()` (agent- `AgentDashboardThread` (class in `agentMET4FOF.dashboard.Dashboard`), 158
`MET4FOF.network.AgentNetwork` (class in `agentMET4FOF`), 162
`method`), 162
`_sine_wave_function()` (agent- `AgentMET4FOF` (class in `agentMET4FOF.agents.base_agents`), 133
`MET4FOF.streams.metrological_signal_streams.MetrologicalSineGenerator` (class in `agentMET4FOF`), 133
`method`), 156
`_target` (agent- `MET4FOF.streams.base_streams.DataStreamMET4FOF` (class in `agentMET4FOF`), 134
`attribute`), 145
`_time` (agent- `MET4FOF.streams.base_streams.DataStreamMET4FOF` (class in `agentMET4FOF`), 134
`attribute`), 146
`_uncertainty_parameters` (agent- `agentMET4FOF.agents.signal_agents` (module),
`MET4FOF.streams.metrological_base_streams.MetrologicalDataStreamMET4FOF` (class in `agentMET4FOF`), 134
`attribute`), 150
`_update_output_channels_info()` (agent- `agentMET4FOF.dashboard.Dashboard` (module), 157
`MET4FOF.agents.base_agents.AgentMET4FOF` (class in `agentMET4FOF`), 134
`method`), 134

A

`add_agent()` (agent- `MET4FOF.network.AgentNetwork` (class in `agentMET4FOF`), 162
`method`), 162
`add_coalition()` (agent- `MET4FOF.network.AgentNetwork` (class in `agentMET4FOF`), 162
`method`), 162
`add_coalition()` (agent- `AgentNetwork` (class in `agentMET4FOF.network`), 160
`MET4FOF.network.AgentNetwork._AgentController` (class in `agentMET4FOF.network`), 161
`method`), 161
`add_coalition_agent()` (agent- `AgentNetwork._AgentController` (class in `agentMET4FOF.network`), 161
`MET4FOF.network.AgentNetwork` (class in `agentMET4FOF`), 162
`method`), 162
`add_coalition_agent()` (agent- `AgentNetwork.Coalition` (class in `agentMET4FOF.network`), 161
`MET4FOF.network.AgentNetwork._AgentController` (class in `agentMET4FOF.network`), 161
`method`), 161

MET4FOF.network), 161
agents() (agentMET4FOF.network.AgentNetwork method), 162
AgentType (agentMET4FOF.agents.base_agents.AgentMET4FOF attribute), 135
all_samples() (agentMET4FOF.streams.base_streams.DataStreamMET4FOF method), 147
current_state (agentMET4FOF.agents.base_agents.AgentMET4FOF attribute), 135
plot_function (agentMET4FOF.agents.base_agents.MonitorAgent attribute), 139
plot_parameters (agentMET4FOF.agents.base_agents.MonitorAgent attribute), 139

B

bind_agents() (agentMET4FOF.network.AgentNetwork method), 162
bind_output() (agentMET4FOF.agents.base_agents.AgentMET4FOF method), 134
buffer (agentMET4FOF.utils.buffer.AgentBuffer attribute), 165
buffer_clear() (agentMET4FOF.agents.base_agents.AgentMET4FOF method), 134
buffer_filled() (agentMET4FOF.agents.base_agents.AgentMET4FOF method), 134
buffer_filled() (agentMET4FOF.utils.buffer.AgentBuffer method), 166
buffer_size (agentMET4FOF.agents.base_agents.AgentMET4FOF attribute), 135
buffer_size (agentMET4FOF.utils.buffer.AgentBuffer attribute), 165
buffer_store() (agentMET4FOF.agents.base_agents.AgentMET4FOF method), 134

C

check_supported_datatype() (agentMET4FOF.utils.buffer.AgentBuffer method), 166
clear() (agentMET4FOF.utils.buffer.AgentBuffer method), 166
connect() (agentMET4FOF.network.AgentNetwork method), 162
convert_single_to_tsbuffer() (agentMET4FOF.utils.buffer.MetrologicalAgentBuffer method), 168
cosine_wave_function() (agentMET4FOF.streams.signal_streams.CosineGenerator method), 149
CosineGenerator (class in agentMET4FOF.streams.signal_streams), 149

D

DataStreamAgent (class in agentMET4FOF.agents.base_agents), 138
DataStreamMET4FOF (class in agentMET4FOF.streams.base_streams), 145

G

get_agent() (agentMET4FOF.network.AgentNetwork method), 162
get_attr() (agentMET4FOF.agents.base_agents.AgentMET4FOF method), 134
get_coalition() (agentMET4FOF.network.AgentNetwork method), 162
get_coalition() (agentMET4FOF.network.AgentNetwork._AgentController method), 161
get_mode() (agentMET4FOF.network.AgentNetwork method), 163

H

handle_process_data() (agentMET4FOF.agents.base_agents.AgentMET4FOF method), 135

I

init_agent() (agentMET4FOF.agents.base_agents.AgentMET4FOF method), 135
init_agent_loop() (agentMET4FOF.agents.base_agents.AgentMET4FOF method), 135
init_app_layout() (agentMET4FOF.dashboard.Dashboard.AgentDashboard method), 157
init_buffer() (agentMET4FOF.agents.base_agents.AgentMET4FOF method), 135
init_parameters() (agentMET4FOF.agents.base_agents.AgentMET4FOF method), 136

init_parameters() (agent- MET4FOF.agents.base_agents.DataStreamAgent method), 138
 init_parameters() (agent- MET4FOF.agents.base_agents.MonitorAgent method), 139
 init_parameters() (agent- MET4FOF.agents.metrological_base_agents.MetrologicalAgent method), 141
 init_parameters() (agent- MET4FOF.agents.metrological_base_agents.MetrologicalMonitorAgent method), 142
 init_parameters() (agent- MET4FOF.agents.metrological_signal_agents.MetrologicalGeneratorAgent method), 143
 init_parameters() (agent- MET4FOF.agents.signal_agents.SineGeneratorAgent method), 140
 init_parameters() (agent- MET4FOF.network.AgentNetwork._AgentController method), 161
 init_parameters() (agent- MET4FOF.network.AgentNetwork._Logger method), 161
 Inputs (agentMET4FOF.agents.base_agents.AgentMET4FOF attribute), 135
 is_port_available() (agent- MET4FOF.dashboard.Dashboard.AgentDashboard method), 157
 items() (agentMET4FOF.utils.buffer.AgentBuffer method), 167
K
 keys() (agentMET4FOF.utils.buffer.AgentBuffer method), 167
L
 log_info() (agentMET4FOF.agents.base_agents.AgentMET4FOF method), 136
 loop_wait (agentMET4FOF.agents.base_agents.AgentMET4FOF attribute), 135
M
 MetrologicalAgent (class in agent- MET4FOF.agents.metrological_base_agents), 140
 MetrologicalAgentBuffer (class in agent- MET4FOF.utils.buffer), 167
 MetrologicalDataStreamMET4FOF (class in agent- MET4FOF.streams.metrological_base_streams), 149
 MetrologicalGeneratorAgent (class in agent- MET4FOF.agents.base_agents), 138
 MetrologicalMonitorAgent (class in agent- MET4FOF.agents.metrological_base_agents), 141
 MetrologicalMultiWaveGeneratorAgent (class in agent- MET4FOF.streams.metrological_signal_streams), 153
 MetrologicalSineGeneratorAgent (class in agent- MET4FOF.agents.signal_agents), 140
 next_sample() (agent- MET4FOF.streams.base_streams.DataStreamMET4FOF method), 147
O
 on_connect_output() (agent- MET4FOF.agents.base_agents.AgentMET4FOF method), 136
 on_received_message() (agent- MET4FOF.agents.base_agents.AgentMET4FOF method), 136
 on_received_message() (agent- MET4FOF.agents.base_agents.MonitorAgent method), 139
 on_received_message() (agent- MET4FOF.agents.metrological_base_agents.MetrologicalAgent method), 141
 on_received_message() (agent- MET4FOF.agents.metrological_base_agents.MetrologicalMonitorAgent method), 142
 on_received_message() (agentMET4FOF.agents.base_agents.AgentMET4FOF attribute), 135
P
 pack_data() (agent- MET4FOF.agents.base_agents.AgentMET4FOF method), 136
 pack_data() (agent- MET4FOF.agents.metrological_base_agents.MetrologicalAgent method), 141
 plot_filter (agent- MET4FOF.agents.base_agents.MonitorAgent attribute), 139
 plots (agentMET4FOF.agents.base_agents.MonitorAgent attribute), 139
 popleft() (agentMET4FOF.utils.buffer.AgentBuffer method), 167

PubAddr (agentMET4FOF.agents.base_agents.AgentMET4FOF.agents_state () (agent-
 attribute), 135 MET4FOF.network.AgentNetwork method),
 PubAddr_alias (agent- 163
 MET4FOF.agents.base_agents.AgentMET4FOF set_attr () (agentMET4FOF.agents.base_agents.AgentMET4FOF
 attribute), 135 method), 137
 set_data_source () (agent-
 MET4FOF.streams.base_streams.DataStreamMET4FOF
 method), 147
 randomize_data () (agent-
 MET4FOF.streams.base_streams.DataStreamMET4FOF generator_function () (agent-
 method), 147 MET4FOF.streams.base_streams.DataStreamMET4FOF
 method), 147
 remove_coalition_agent () (agent-
 MET4FOF.network.AgentNetwork method), set_generator_function () (agent-
 163 MET4FOF.streams.metrological_base_streams.MetrologicalData
 method), 150
 remove_coalition_agent () (agent-
 MET4FOF.network.AgentNetwork._AgentController set_metadata () (agent-
 method), 161 MET4FOF.streams.base_streams.DataStreamMET4FOF
 method), 148
 reset () (agentMET4FOF.agents.base_agents.AgentMET4FOF set_running_state () (agent-
 method), 136 MET4FOF.network.AgentNetwork method),
 reset () (agentMET4FOF.agents.base_agents.DataStreamAgent MET4FOF.network.AgentNetwork
 method), 138 163
 reset () (agentMET4FOF.agents.base_agents.MonitorAgent set_stop_state () (agent-
 method), 139 MET4FOF.network.AgentNetwork method),
 reset () (agentMET4FOF.agents.metrological_base_agents.MetrologicalMonitorAgent 163
 method), 142 sfreq (agentMET4FOF.streams.base_streams.DataStreamMET4FOF
 attribute), 146
 respond_reply_attr () (agent-
 MET4FOF.agents.base_agents.AgentMET4FOF shutdown () (agentMET4FOF.agents.base_agents.AgentMET4FOF
 method), 136 method), 137
 respond_request_attr () (agent-
 MET4FOF.agents.base_agents.AgentMET4FOF shutdown () (agentMET4FOF.network.AgentNetwork
 method), 136 method), 163
 respond_request_method () (agent-
 MET4FOF.agents.base_agents.AgentMET4FOF shutdown () (agentMET4FOF.network.AgentNetwork.MesaModel
 method), 136 method), 161
 sine_wave_function () (agent-
 MET4FOF.streams.signal_streams.SineGenerator
 method), 148
 run () (agentMET4FOF.dashboard.Dashboard.AgentDashboard SineGenerator (class in agent-
 method), 158 MET4FOF.streams.signal_streams), 148
 run () (agentMET4FOF.dashboard.Dashboard.AgentDashboardThread SineGeneratorAgent (class in agent-
 method), 158 MET4FOF.agents.signal_agents), 140
 start_server_mesa () (agent-
 MET4FOF.network.AgentNetwork method),
 163
 start_server_osbrain () (agent-
 MET4FOF.network.AgentNetwork method),
 163
 step () (agentMET4FOF.agents.base_agents.AgentMET4FOF
 method), 137
 step () (agentMET4FOF.network.AgentNetwork.MesaModel
 method), 161
 stop_agent_loop () (agent-
 MET4FOF.agents.base_agents.AgentMET4FOF
 method), 138
 store () (agentMET4FOF.utils.buffer.AgentBuffer
 method), 167
 supported_datatypes (agent-

R
 randomize_data () (agent-
 MET4FOF.streams.base_streams.DataStreamMET4FOF generator_function () (agent-
 method), 147 MET4FOF.streams.base_streams.DataStreamMET4FOF
 method), 147
 remove_coalition_agent () (agent-
 MET4FOF.network.AgentNetwork method), set_generator_function () (agent-
 163 MET4FOF.streams.metrological_base_streams.MetrologicalData
 method), 150
 remove_coalition_agent () (agent-
 MET4FOF.network.AgentNetwork._AgentController set_metadata () (agent-
 method), 161 MET4FOF.streams.base_streams.DataStreamMET4FOF
 method), 148
 reset () (agentMET4FOF.agents.base_agents.AgentMET4FOF set_running_state () (agent-
 method), 136 MET4FOF.network.AgentNetwork method),
 reset () (agentMET4FOF.agents.base_agents.DataStreamAgent MET4FOF.network.AgentNetwork
 method), 138 163
 reset () (agentMET4FOF.agents.base_agents.MonitorAgent set_stop_state () (agent-
 method), 139 MET4FOF.network.AgentNetwork method),
 reset () (agentMET4FOF.agents.metrological_base_agents.MetrologicalMonitorAgent 163
 method), 142 sfreq (agentMET4FOF.streams.base_streams.DataStreamMET4FOF
 attribute), 146
 respond_reply_attr () (agent-
 MET4FOF.agents.base_agents.AgentMET4FOF shutdown () (agentMET4FOF.agents.base_agents.AgentMET4FOF
 method), 136 method), 137
 respond_request_attr () (agent-
 MET4FOF.agents.base_agents.AgentMET4FOF shutdown () (agentMET4FOF.network.AgentNetwork
 method), 136 method), 163
 respond_request_method () (agent-
 MET4FOF.agents.base_agents.AgentMET4FOF shutdown () (agentMET4FOF.network.AgentNetwork.MesaModel
 method), 136 method), 161
 sine_wave_function () (agent-
 MET4FOF.streams.signal_streams.SineGenerator
 method), 148
 run () (agentMET4FOF.dashboard.Dashboard.AgentDashboard SineGenerator (class in agent-
 method), 158 MET4FOF.streams.signal_streams), 148
 run () (agentMET4FOF.dashboard.Dashboard.AgentDashboardThread SineGeneratorAgent (class in agent-
 method), 158 MET4FOF.agents.signal_agents), 140
S
 send_output () (agent-
 MET4FOF.agents.base_agents.AgentMET4FOF
 method), 136
 send_plot () (agent-
 MET4FOF.agents.base_agents.AgentMET4FOF
 method), 137
 send_request_attribute () (agent-
 MET4FOF.agents.base_agents.AgentMET4FOF
 method), 137
 send_request_method () (agent-
 MET4FOF.agents.base_agents.AgentMET4FOF
 method), 137
 send_set_attr () (agent-
 MET4FOF.agents.base_agents.AgentMET4FOF
 method), 137

MET4FOF.utils.buffer.AgentBuffer attribute),
165

T

terminate() (agent-
MET4FOF.dashboard.Dashboard.AgentDashboardProcess
method), 158

terminate() (agent-
MET4FOF.dashboard.Dashboard.AgentDashboardThread
method), 158

time_unc (agent*MET4FOF.streams.metrological_base_streams.MetrologicalDataStreamMET4FOF*
attribute), 151

U

unbind_agents() (agent-
MET4FOF.network.AgentNetwork method),
163

unbind_output() (agent-
MET4FOF.agents.base_agents.AgentMET4FOF
method), 138

update() (agent*MET4FOF.utils.buffer.AgentBuffer*
method), 167

update() (agent*MET4FOF.utils.buffer.MetrologicalAgentBuffer*
method), 168

update_plot_memory() (agent-
MET4FOF.agents.base_agents.MonitorAgent
method), 139

update_plot_memory() (agent-
MET4FOF.agents.metrological_base_agents.MetrologicalMonitorAgent
method), 142

V

value_unc (agent*MET4FOF.streams.metrological_base_streams.MetrologicalDataStreamMET4FOF*
attribute), 151

values() (agent*MET4FOF.utils.buffer.AgentBuffer*
method), 167